

D

C

B

A

D

C

B

A

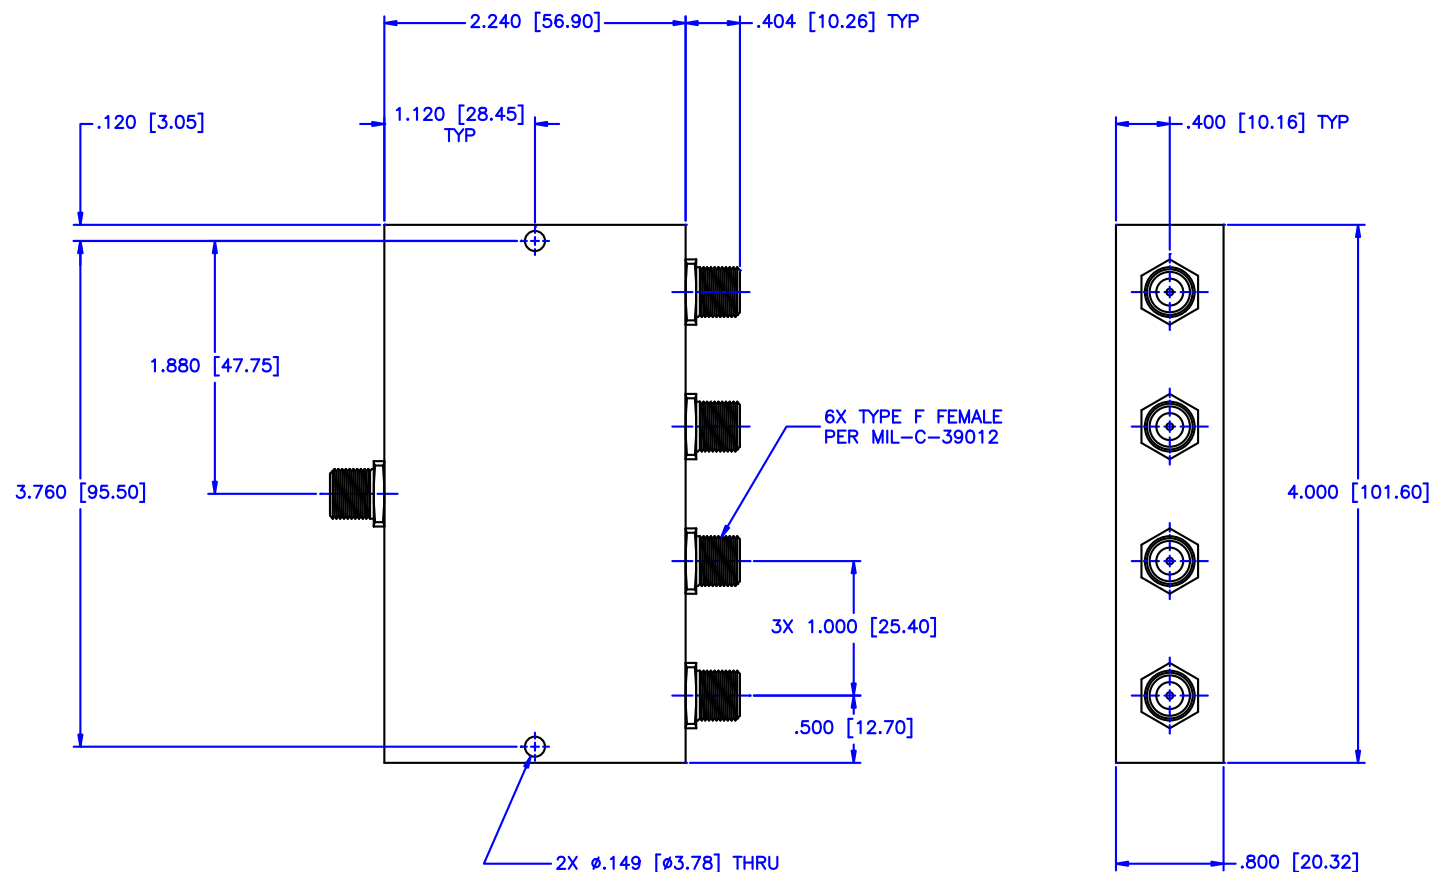
4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

**SPECIFICATIONS:**

Frequency Range: 950–1450 MHz

Insertion Loss: 0.9dB Max.

Isolation: 17dB Min.

VSWR: 1.40:1 Max.

Amplitude Balance: ± 0.3 dBPhase Balance: $\pm 6^\circ$ Max.

Impedance: 75 Ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		4-WAY POWER DIVIDER		
PART NO.		PM4-40-75/FF		
CAGE CODE:		SIZE: N/A	REV: N/A	DWG NO. 81022
DO NOT SCALE THE DRAWING				

DATE: 03-28-1998	DATE: 03-28-1998
Paiboon Luekhamhan	T. Nguyen

THIRD ANGLE PROJECTION
