


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

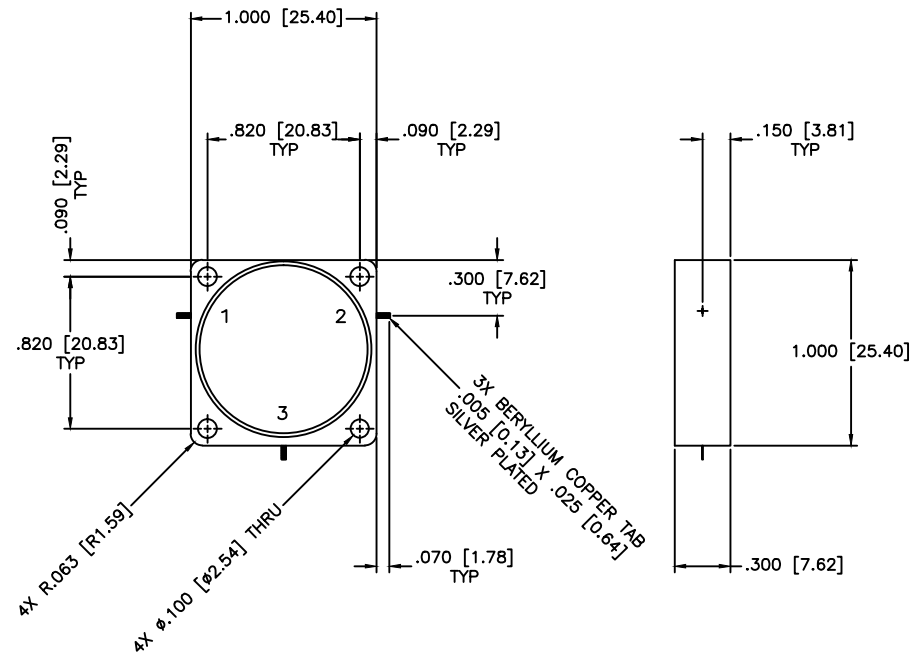

SPECIFICATIONS

Frequency Range: 3–6 MHz
 Isolation: 16dB Min.
 Insertion loss: 0.7dB Max.
 VSWR: 1.40:1 Max.
 Operating Temperature: –10°C to +70°C
 Power: 25W Avg. 200W Peak

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWING TITLE:		DROP-IN CIRCULATOR		
PART NO.		MC-57		
DRAWN: Paiboon Luekhamhan	DATE: 02-24-2012	CAGE CODE:	SIZE: A	REV: A
APPROVED: T. Nguyen	DATE: 02-24-2012	OD2L5	DWG NO. 85540	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING		