



REV.	DATE	DESCRIPTION
A	01/13/03	MODIFY PLATING TO NEXCOTE

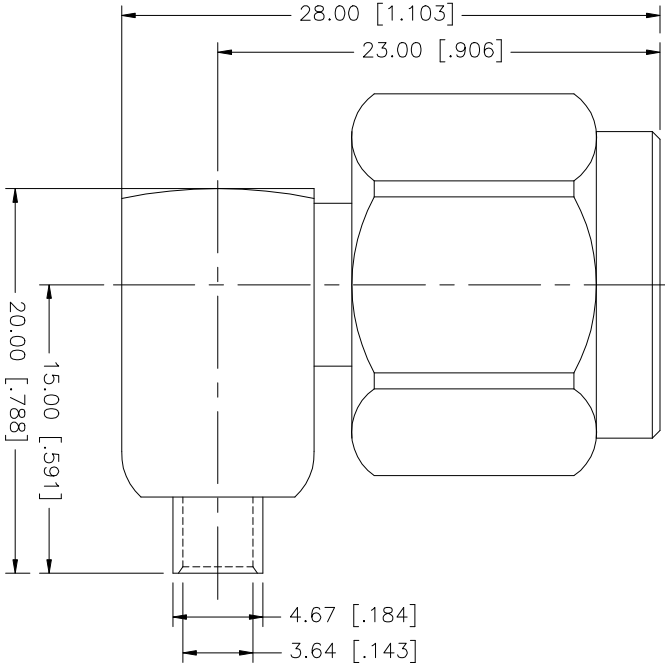

RECOMMENDED
CABLE STRIPPING DIM'S

9	NUT	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE	PART DESCRIPTION N R/A DIRECT SOLDER PLUG (FOR .141" SEMI RIGID CABLE)										
8	BARREL	BRASS	NEXCOTE	1		DRAWN	G.R.S.	01/13/03											
7	HOUSING	BRASS	NEXCOTE	1		CHECKED													
6	CONTACT PIN	BRASS	GOLD	1		ISSUED													
5	RETAINER RING	SUS 304	NATURAL	1		SHEET	1 OF 1												
4	GASKET	SILICONE	RED	1	CAD FILE C:/172/172236-10.DWG			DWG. NO.	172236-10.DWG	REV.	A	SIZE	A	SCALE	NA				
3	CONTACT BODY	BRASS	NEXCOTE	1				PART NO.											
2	INSULATOR	TEFLON	NATURAL	1				172236-10											
1	SHELL/BODY	BRASS	NEXCOTE	1															
DESCRIPTION					MATERIAL					FINISH					QTY				