


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

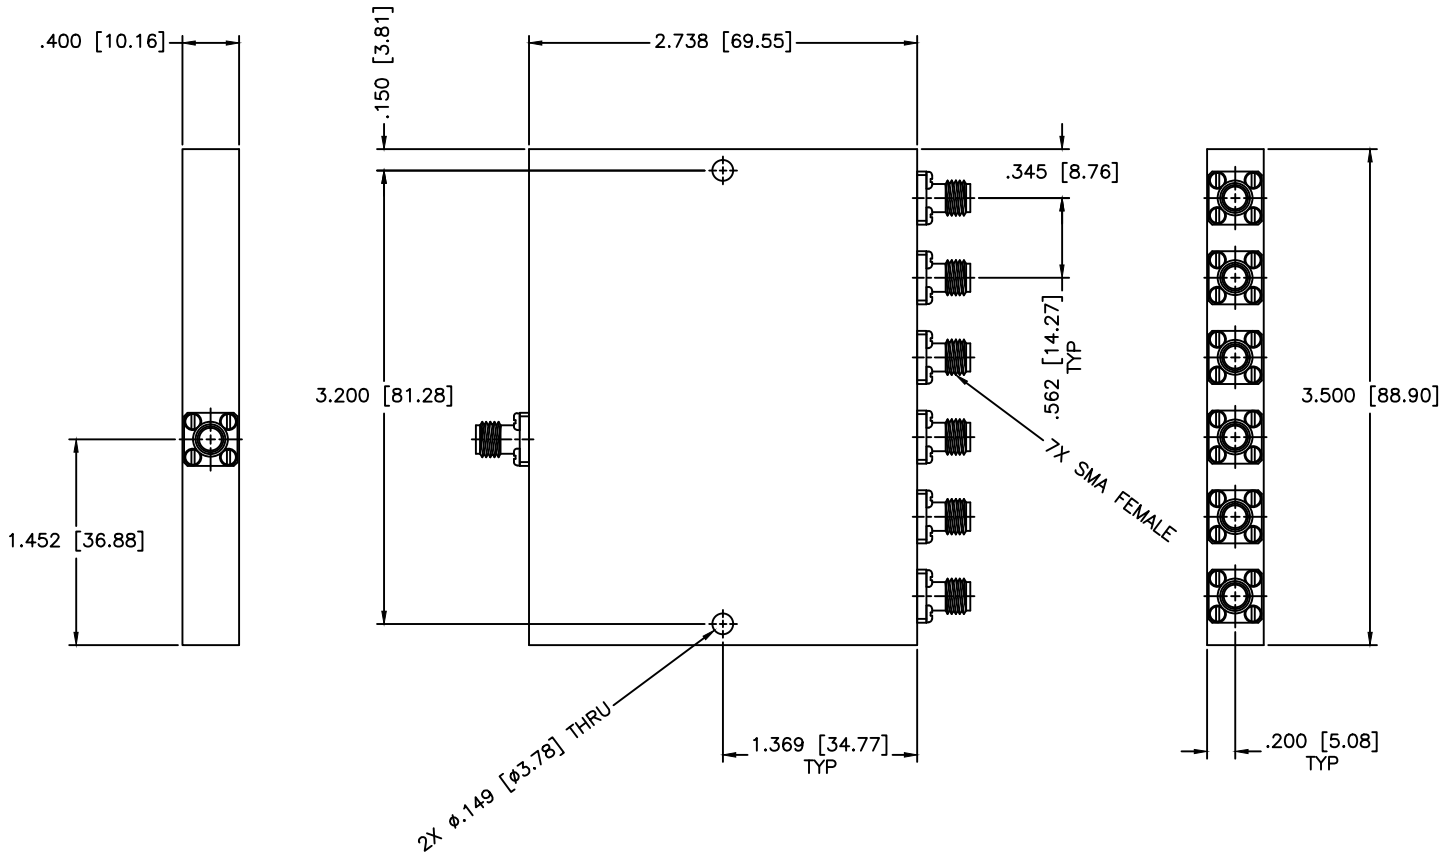

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 2.0dB Max.
 Isolation: 15dB Min.
 Amplitude Balance: ±1.0dB Max.
 VSWR IN/OUT: 1.50:1/1.40:1 Max.
 Average Power: 1W Max.

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6118 http://www.MCL.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.03 ±.015 ANGLE: ±1/2°			DRAWING TITLE: 6-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luekhamhan DATE: 02-18-2011		PART NO.: PS6-126			
APPROVED: T. Nguyen DATE: 02-18-2011		CAGE CODE: OD2L5 SIZE: A REV: A DO NOT SCALE THE DRAWING		DWG NO.: 82036	

