

TERMINATIONS, FEEDTHRU BNC

DC - 500 MHz
2 WATTS

api 
technologies corp.
> INMET

MODELS: 3032

SPECIFICATIONS:

Electrical:

Frequency Range _____ DC — 500 MHz

VSWR _____ 1.25:1 Max.

Input Power _____ 2 Watts Avg. @ +25°C

Derated Linearly to 0.5 Watts @ +125°C

Impedance _____ 50 Ohms

Operating Temp. Range _____ -65°C to +125°C


Mechanical:

BNC Connectors _____ Nickel Plated Brass
Mates with MIL-STD-348

Conductors _____ Gold Plated Beryllium Copper or Brass

Model Number: **3032**

BNC Male/Female Connector

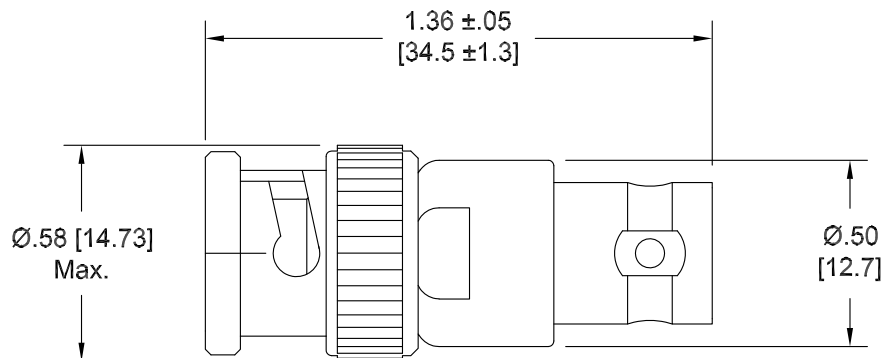

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

Design specifications are subject to change without notice.

Contact factory for technical specifications before purchasing or use.

3032; REV J

300 Dino Drive • Ann Arbor, MI 48103-9457 U.S.A. • 888-244-6638 or 734-426-5553 • FAX 734-426-5557 • inmet.apitech.com