


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

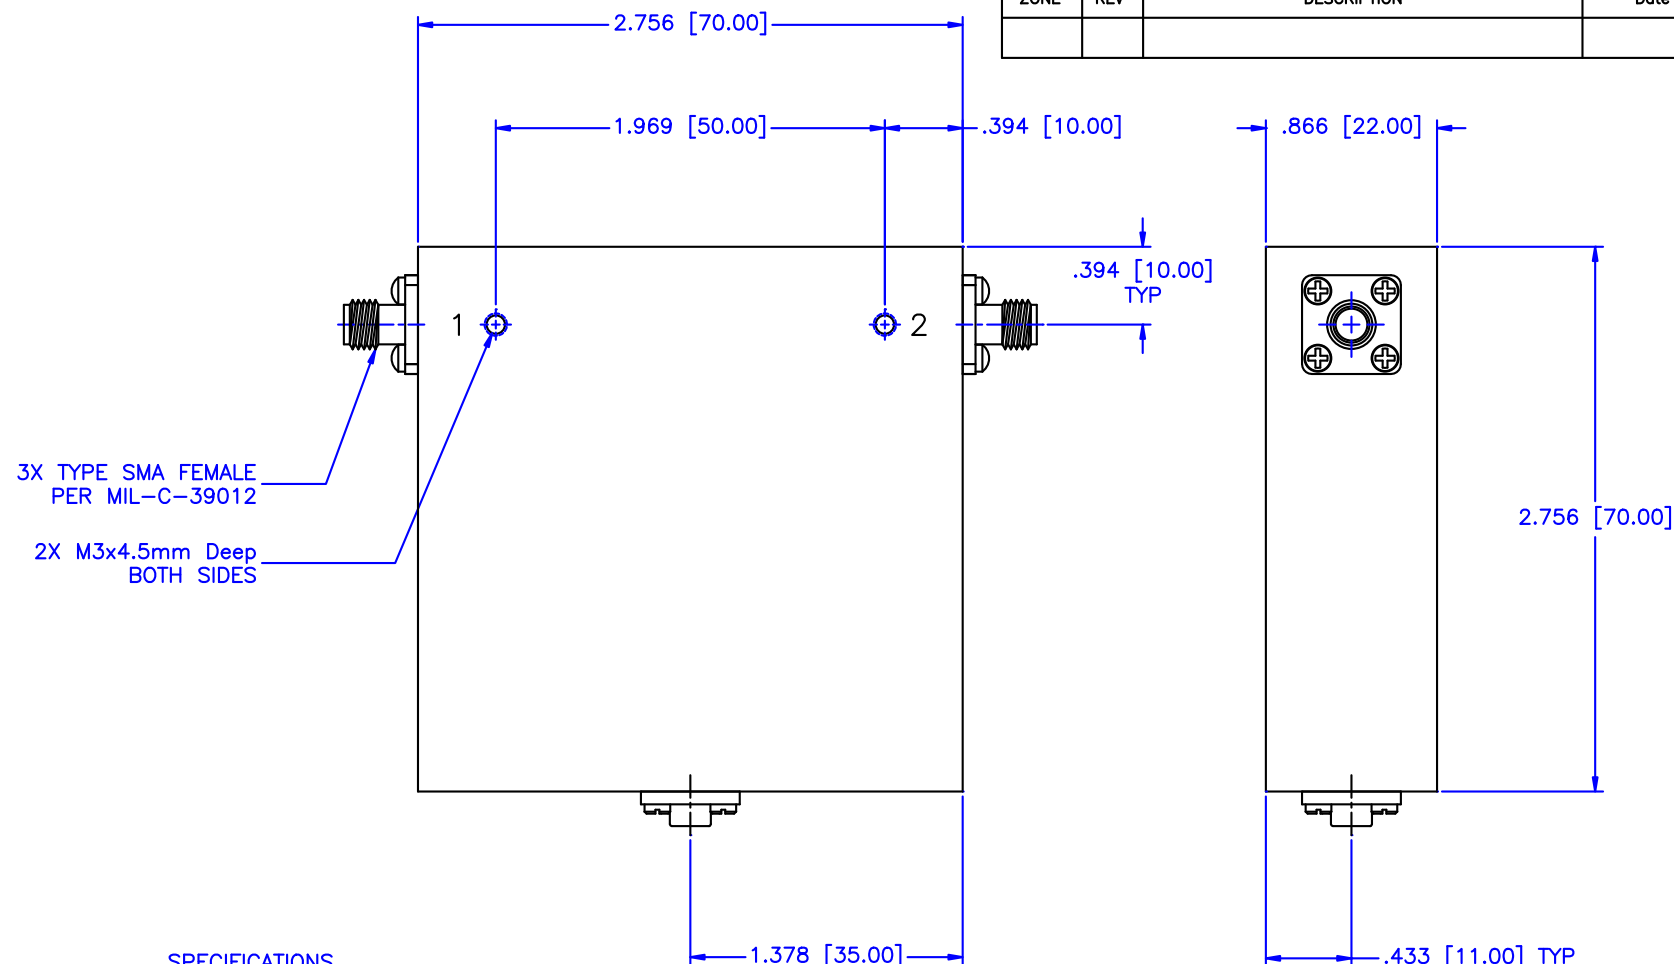

SPECIFICATIONS


Frequency Range: 1–2.7 GHz

Isolation: 15dB Min.

Insertion loss: 0.90dB Max.

VSWR: 1.50:1 Max.

Operating Temperature: +10°C to +50°C

MATERIAL: 		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		SHEET: N/A		
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± N/A DECIMALS: ±.05 ANGLE: ±1/2°		DRAWING TITLE: COAXIAL ISOLATOR		
		PART NO. IS-168		
DRAWN: Paiboon Luekhamhan	DATE: 11-25-2013	PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 11-25-2013	THIRD ANGLE PROJECTION 	REV: N/A	DWG NO. 86459
			DO NOT SCALE THE DRAWING	