


Drop-in Circulator, 130-150MHz

**ELECTRICAL SPECIFICATION**

Product Model:	VDC-013015
Frequency Range (MHz):	130-150
Impedance (ohm):	50
Storage Temp. Range (°C):	-20~+90
Operating Temp. Range (°C):	-20~+60
VSWR max:	1.22
Insertion Loss ( dB ) max:	0.60
Isolation ( dB ) min:	20
Power Average ( W ) :	50
Body:	S-Steel/Nickel

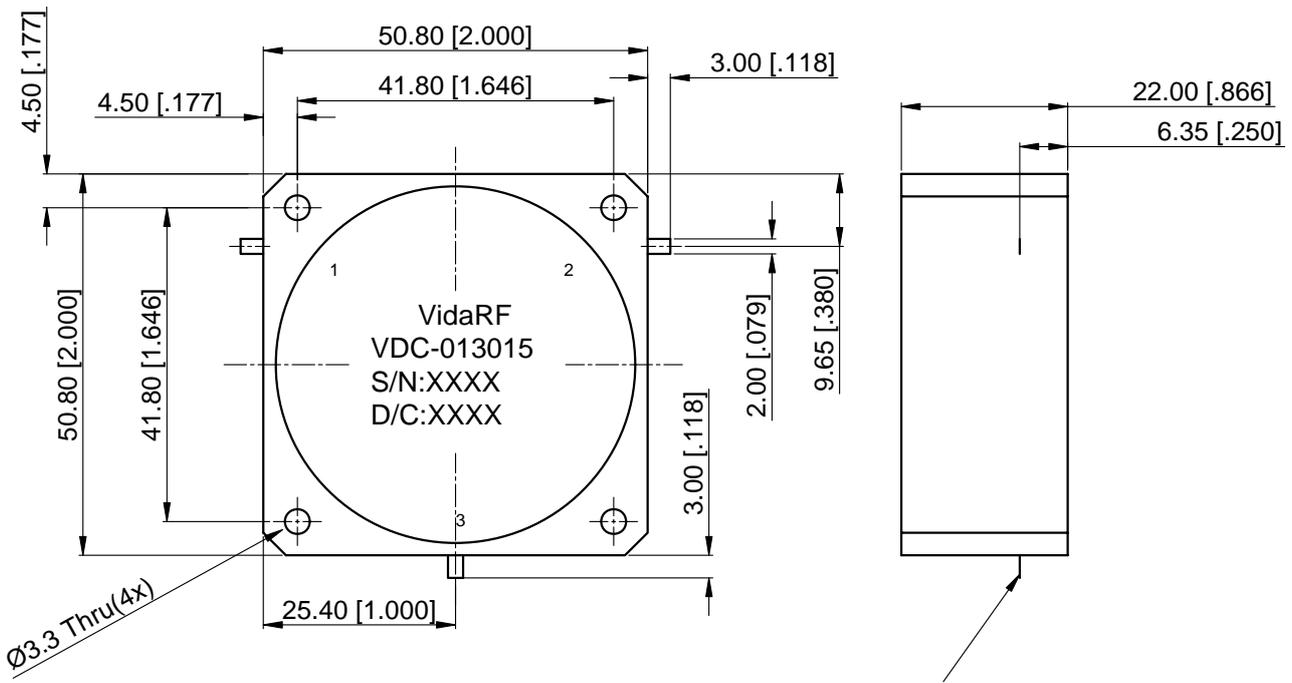

TAB 0.13±0.04 [0.005±0.0016] THK.  
Beryllium copper silver plated(3 pl)

Drawn:	T. P	04/07/12
Checked:	D. H	04/07/12
Approved:	S. K	04/07/12

Title: **Drop-in Circulator**

Description	Ecn.No	Date	Rev

Tel:877-777-8432  
www.vidarF.com

Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only.  
Unless Otherwise Specified tolerance are:  
.XX ±0.13 [0.005"]  
.X ±0.20 [0.008"]  
X ±0.50 [0.019"]  
.X° ±1°  
X° ±2°

Cage Code <b>6KQ83</b>	Part No: <b>VDC-013015</b>
View: 	Size: A4   Scale: 1:1   Sheet: 1/1   Rev: A