

Features

- 2-way
- 90 Degree
- Surface Mount
- Tape and reel packaging available
- 260°C Reflow Compatible
- RoHS* compliant

Product Image



Description

M/A-COM's MAPD-009850-HW1268 is a RoHS Compliant 2-way 90° power divider in a low cost, surface mount package. Ideally suited for high volume cellular, wireless applications.

The MAPD-009850-HW1268 is available in a SM-89 surface mount package and is designed to be utilized in both RoHS and standard reflow profiles. Parts are packaged in tape & reel.

Ordering Information

Part Number	Package
MAPD-009850-HW1268	Tape and Reel (900 piece Reel)

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$

Frequency Range	Test Conditions	Units	Min.	Typ.	Max.
Insertion Loss	112 - 168 MHz	dB	—	0.5	1.2
Isolation	112 - 168 MHz	dB	18	23	—
Amplitude Unbalance	112 - 168 MHz	dB	—	1.0	2.0
Phase Unbalance	112 - 168 MHz	°	—	1°	2°
Input Return Loss	112 - 168 MHz	dB	20	24	—

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Impedance	50 Ohms nominal
RF Power	1 Watt
Internal Load Dissipation	0.125 Watt
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C


Pin Configuration

Pin No.	Function
Input	1
Port 1	4
Port 2	6
External 50 Ohms	3
Not Connected	2,5


1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

Typical Performance Curves


Insertion Loss Port 1

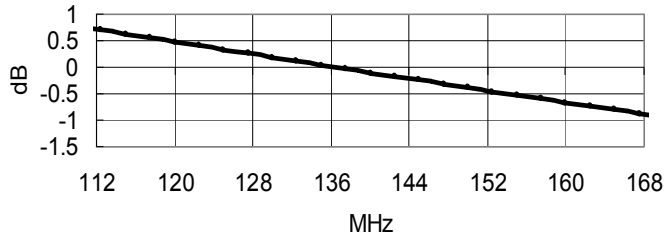


Insertion Loss port 2

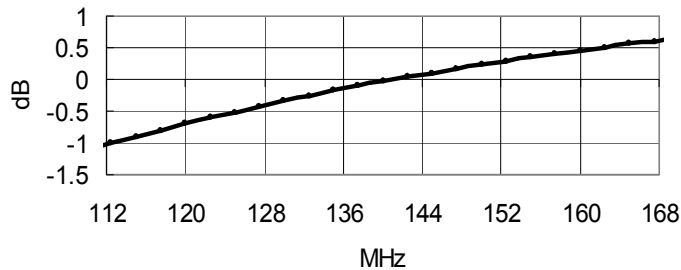


Amplitude Unbalance

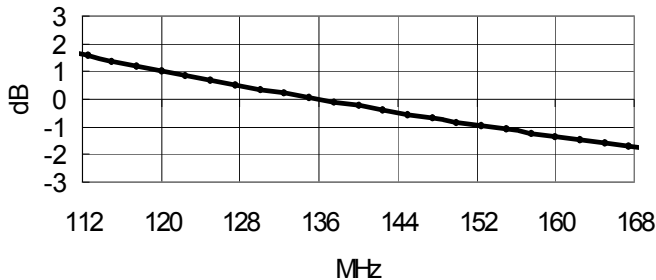

Isolation

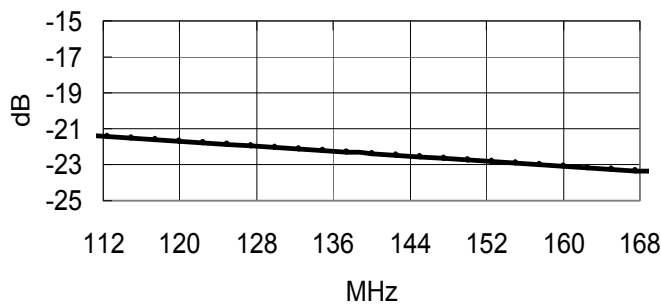


SM - 89 Package

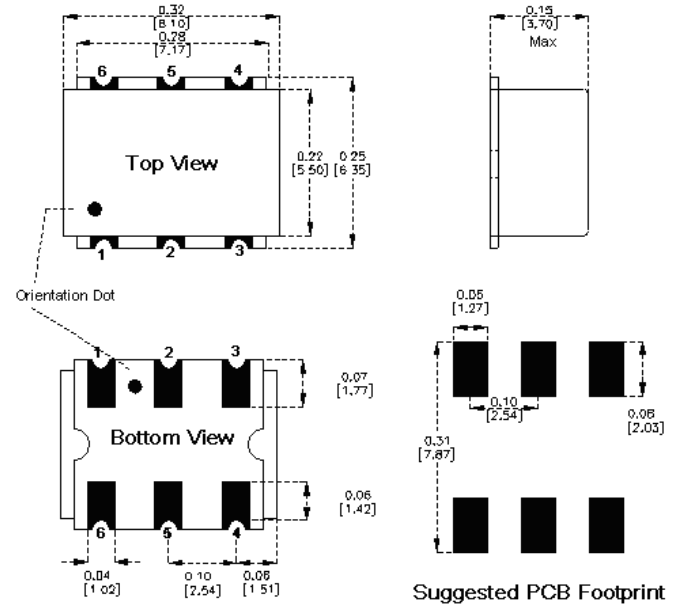

* Dimensions are inches (millimeters) ± 0.015 (0.38) unless otherwise specified.

Phase Unbalance

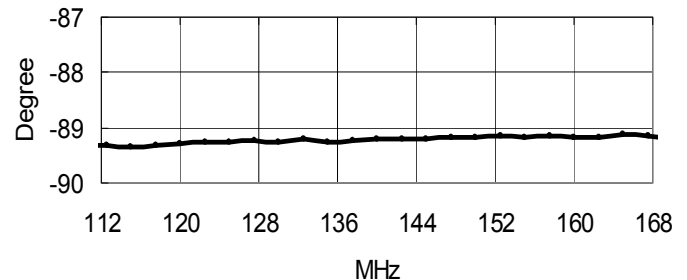

Input Return Loss

