


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

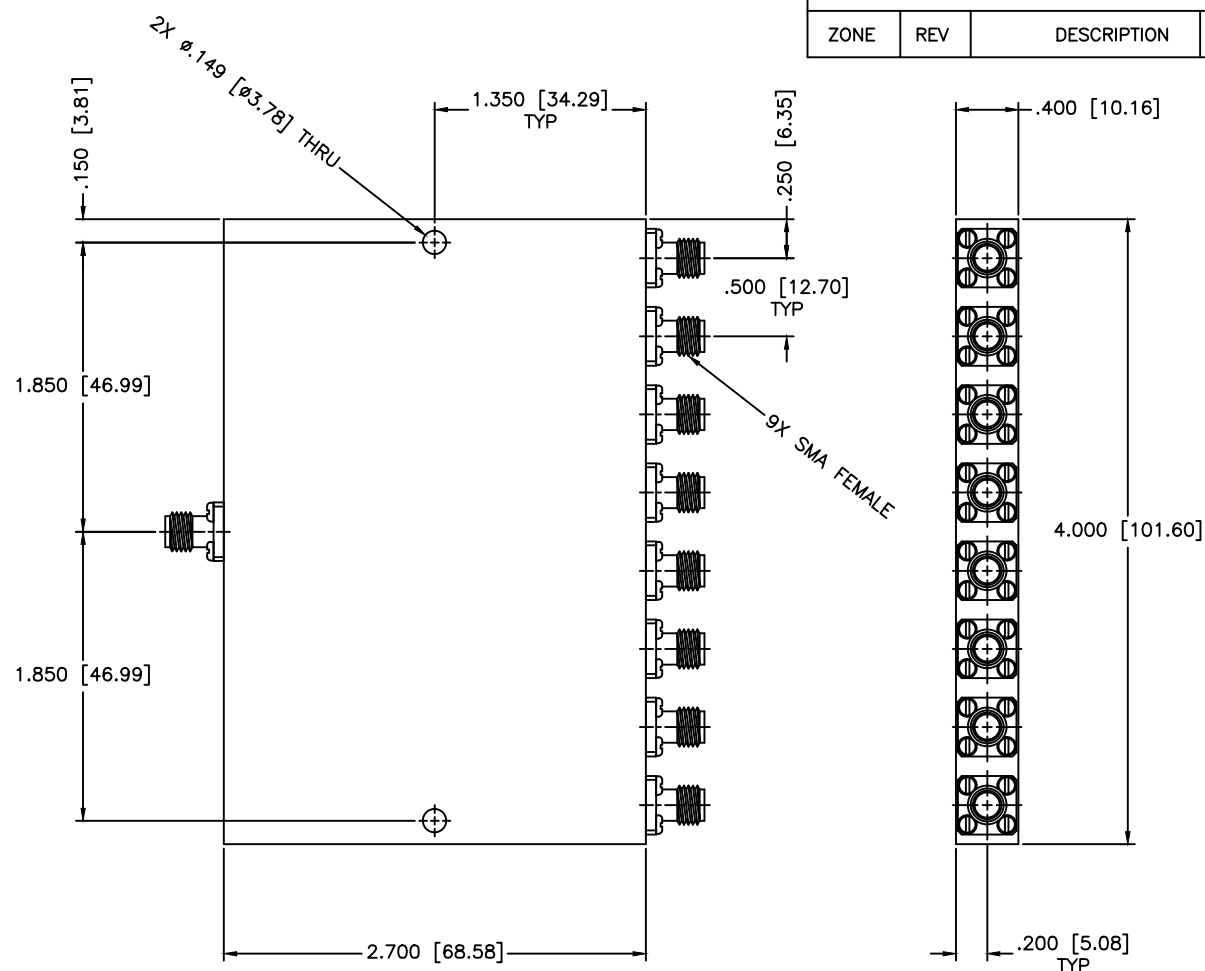

SPECIFICATIONS

Frequency Range: 0.8–2.4 GHz
 VSWR In/Out: 1.60:1/1.30:1 Max.
 Insertion Loss: 1.2dB Max.
 Isolation: 16dB Min.
 Phase Balance: ± 12 Deg. Max.
 Amplitude Balance: ± 0.6 dB Max.
 Power Rating: 30W (Load vswr @ 1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 8-WAY POWER DIVIDER		SHEET: N/A
PART NO. PS8-15				
DRAWN: Paiboon Luekhamhan	DATE: 10-12-2006	CAGE CODE: OD2L5		
APPROVED: T. Nguyen	DATE: 10-12-2006	SIZE: N/A	REV: A	DWG NO. 82682
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		