


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

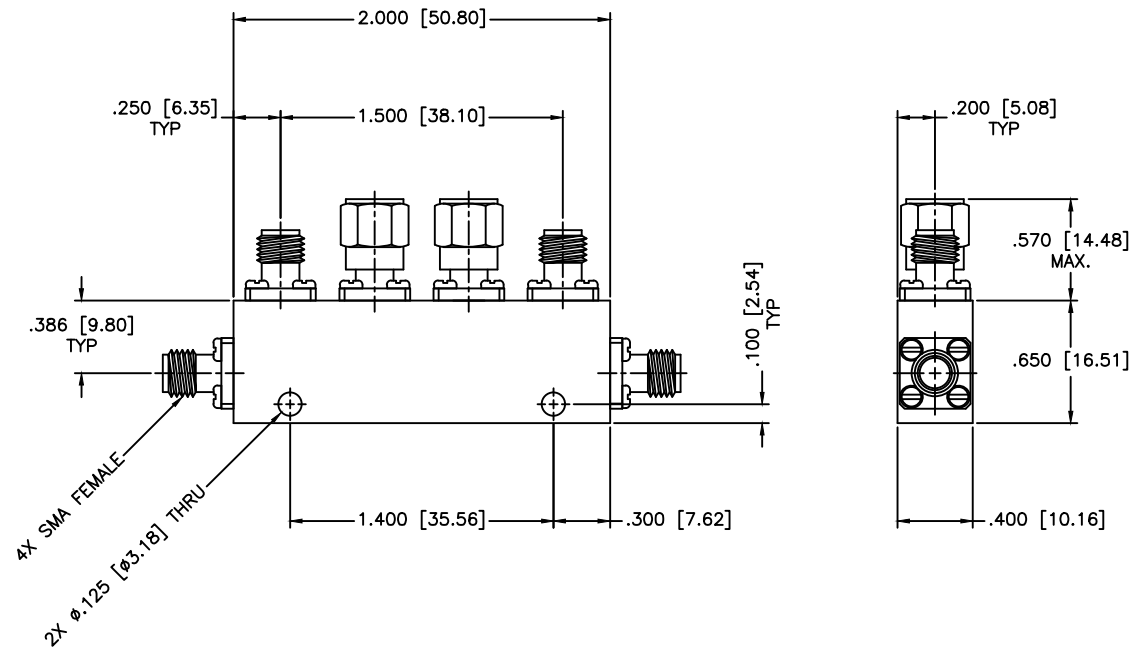

SPECIFICATIONS

Frequency Range: 2.6–5.2 GHz
 VSWR: 1.30:1 Max.
 Insertion loss: 1.5dB Max.
 Directivity: 18dB Max.
 Freq Sensitivity: ± 0.8 dB
 Coupling: 10 ± 1.25 dB

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
				SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .02 \pm .009$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE:			
		DUAL DIRECTIONAL COUPLER			
DRAWN: Paiboon Luekhamhan DATE: 12-03-2009		PART NO.: DC4-10			
APPROVED: T. Nguyen DATE: 12-03-2009		CAGE CODE: OD2L5 SIZE: A REV: N/A DWG NO.: 80616			
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING			