


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

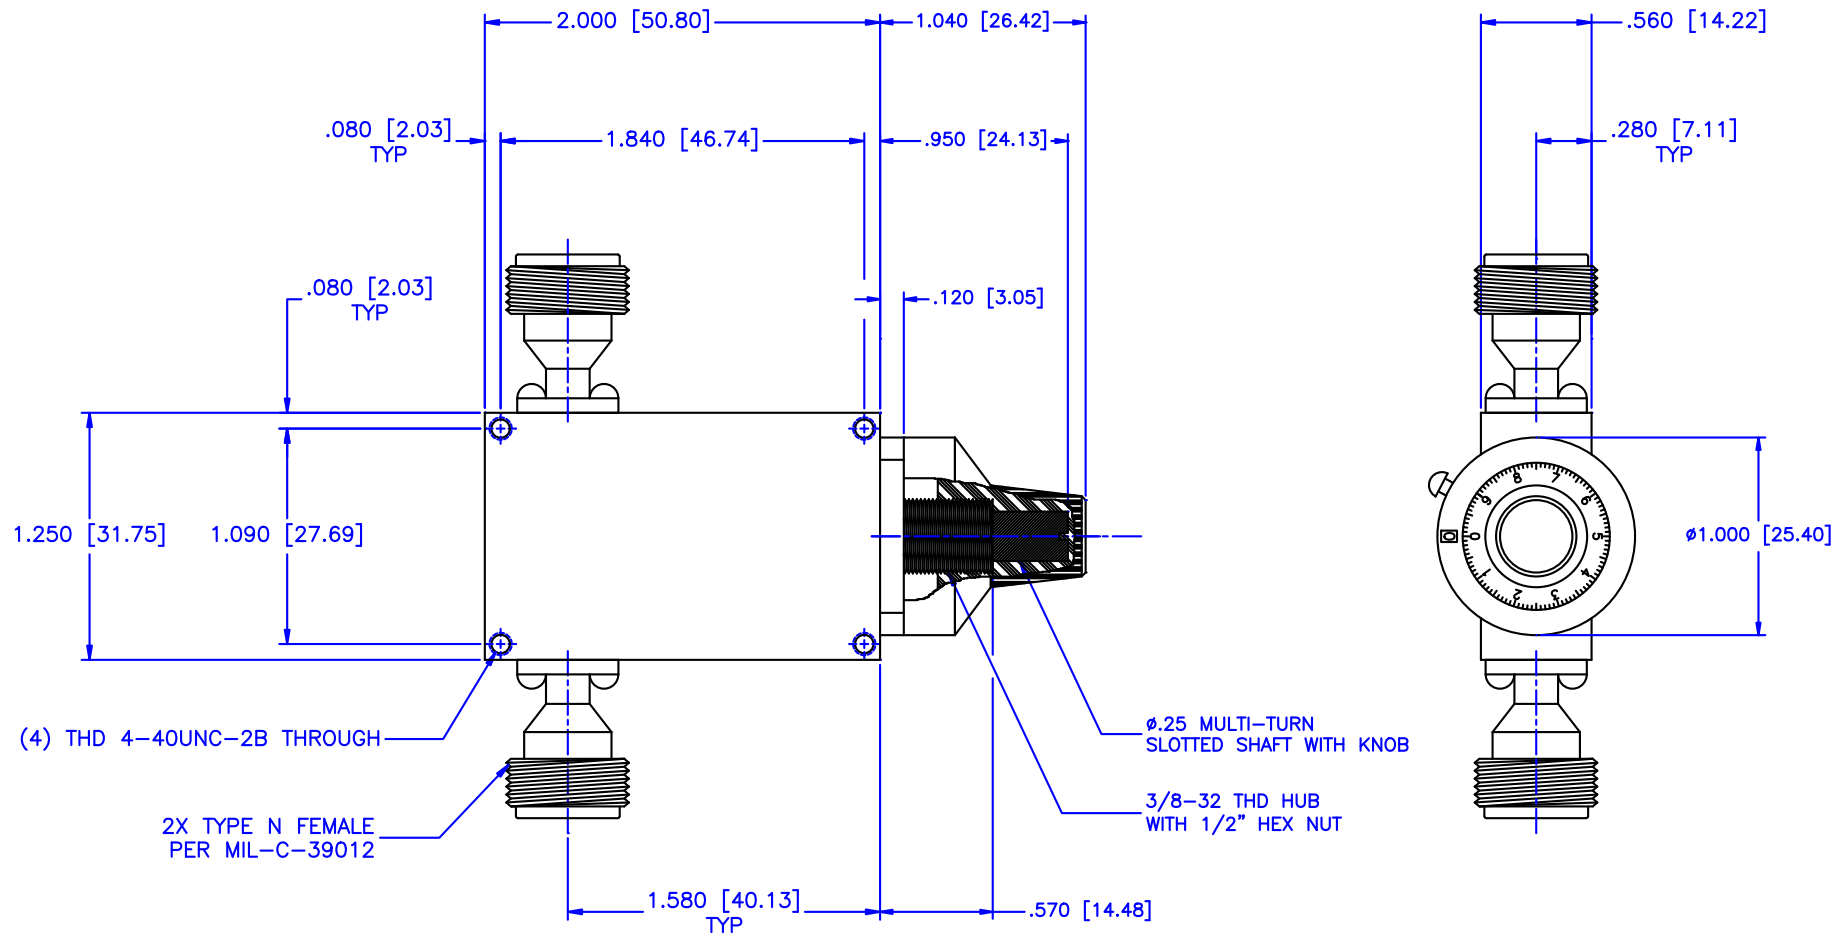

Specifications:

Frequency Range: 5.9–6.5 GHz
 Attenuation Range: 20 dB
 Insertion Loss: 0.5 Max.
 VSWR: 1.50:1 Max.
 Attenuatio Vs Frequency: ± 1.0 dB

MATERIAL: 		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 11-18-2001		DRAWING TITLE: ATTENUATOR WITH COUNTING DIAL
APPROVED: T. Nguyen		DATE: 11-18-2001		PART NO. CA4-20/NF/D
THIRD ANGLE PROJECTION 		CAGE CODE: OD2L5	SIZE: A	REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 83889