


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

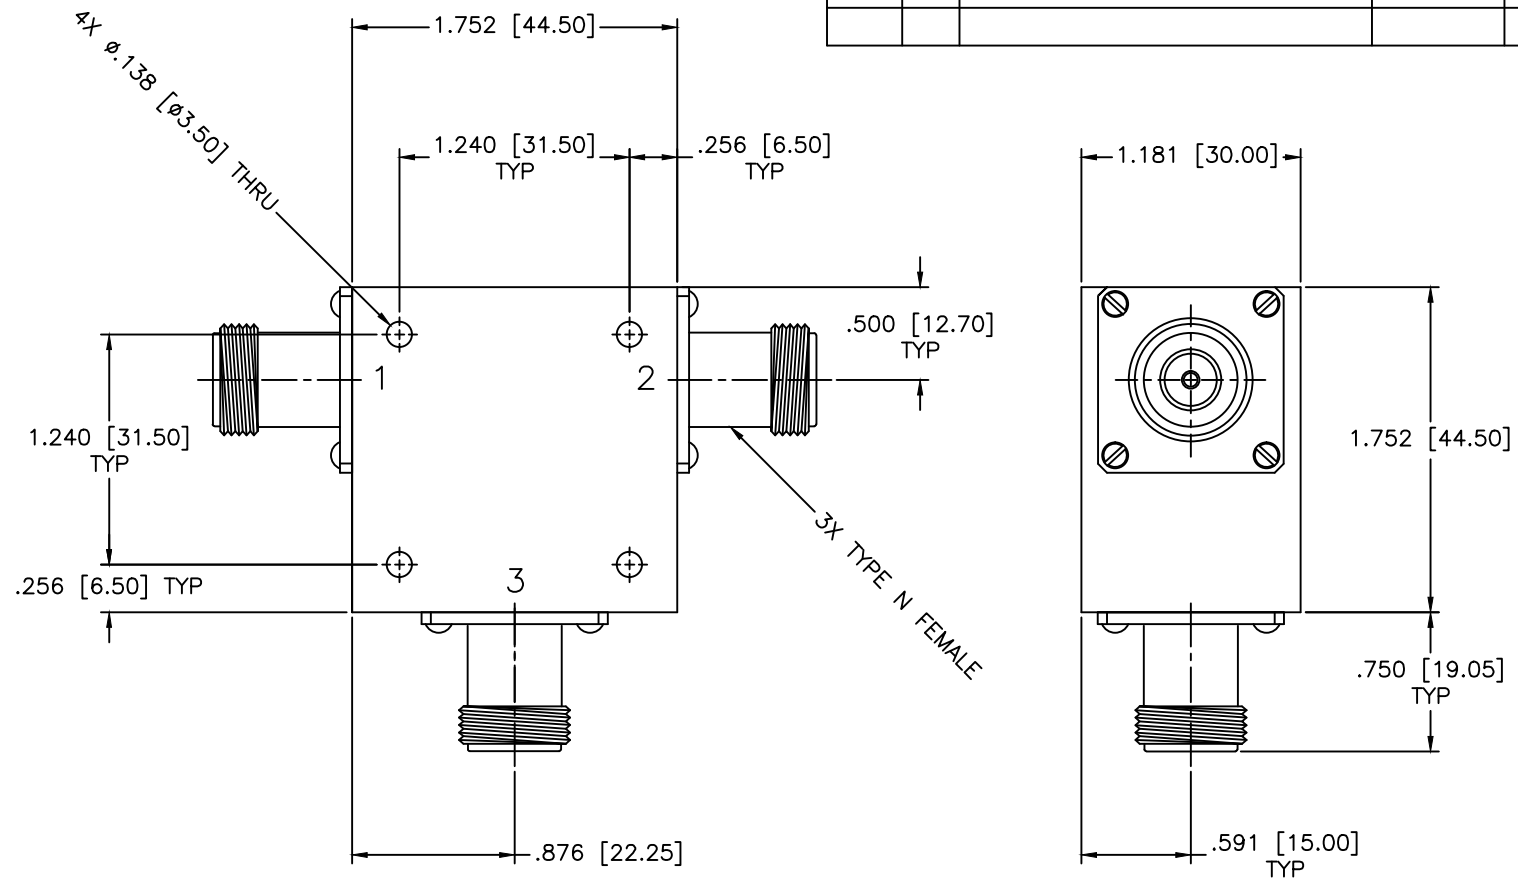

SPECIFICATIONS

Frequency Center: 1300 MHz
Isolation: 22dB Min.
Insertion loss: 0.30dB Max.
VSWR: 1.20:1 Max.
Power Average: 500 Watts
Operating Temperature: -40°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:		N/A					
				SHEET:		N/A					
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:							
				CIRCULATOR							
DRAWN:		DATE:		PART NO.							
Paiboon Luekhamhan		01-25-2012		CS-180/NF							
APPROVED:		DATE:		CAGE CODE:		SIZE:		REV:		DWG NO.	
						A		N/A		85983	
T. Nguyen		01-25-2012		OD2L5		DO NOT SCALE THE DRAWING					
				THIRD ANGLE PROJECTION							