





Standards
NF C 96-315
MIL-DTL-39030

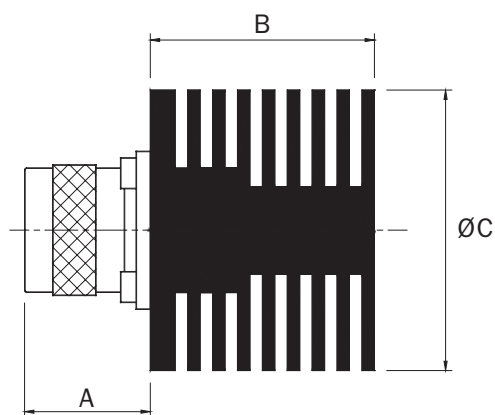

Impedance	$50 \Omega \pm 2\%$
Frequency	DC – 4 GHz
Max VSWR	≤ 1.10 at 2 GHz, ≤ 1.20 at 4 GHz
Temperature range	-55 to +125°C
Average power @ 25°C	12 W
Peak power	1 kW
Weight	145 g (17-3361, 17-3113) / 90 g (17-0225)

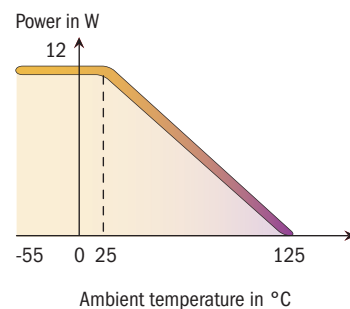

Dimensions in mm

P/N	Connector	A	B	C
17-3361	N m	21	36	45
17-3113	N f	19	36	45
17-0225	7-16 m	31	20	42