


LOW PIM ADAPTER

Environmental data

Frequency range : DC ~ 6GHz
 V.S.W.R : 1.20 : 1 Max
 PIMD : 155 dBc min(2x20W)
 Operating Temperature : -45°C ~ 120°C

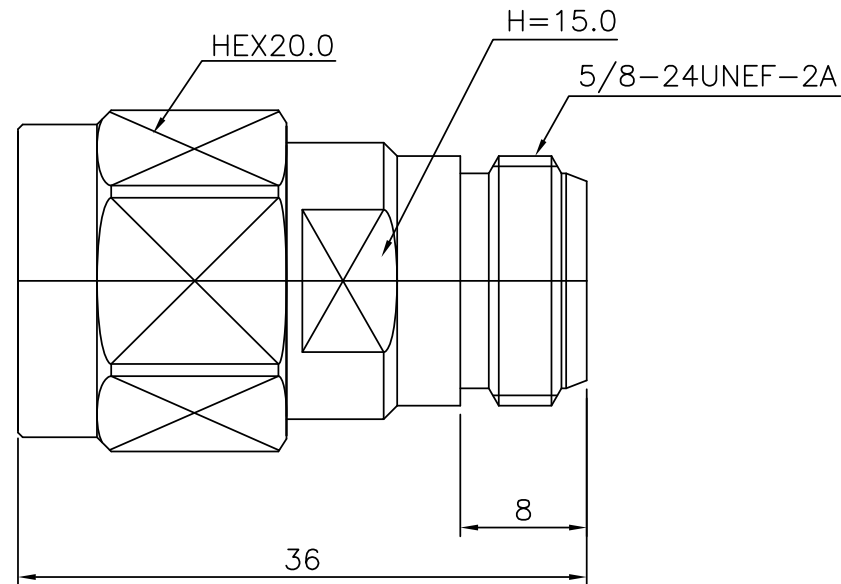

Connector parts	Materials	Finish
Body	Brass	Suco Plated
Coupling cap	Brass	Suco Plated
Center contact	Brass	Silver Plated
Insulator	TEFLON	—

				Drawn: T. P 10/25/13	Title: N-TYPE MALE TO FEMALE				
				Checked: D. H 10/25/13					
Description	Ecn.No	Date	Rev	Approved: S. K 10/25/13					
 Tel:877-777-8432 www.vidaRF.com				Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX±0.13 [.005"] .X±0.20 [.008"] X±0.50 [.019"] .X°±1° X°±2°	Cage Code 6KQ83	Part No: ADP-3000-370-LP			
				View: 					
									Size: B4