
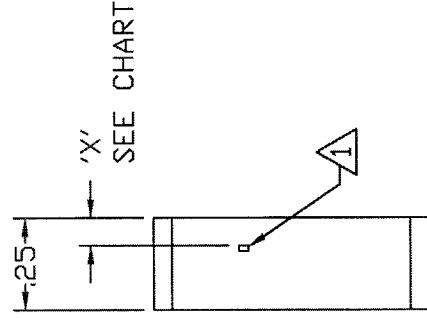


REVOLUTIONS			
REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		

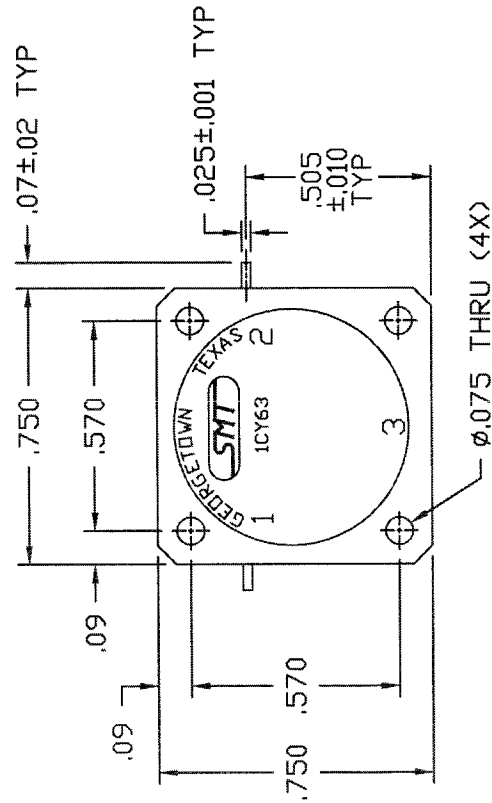

SPECIFICATIONS:

1. FREQUENCY RANGE___2.70 TO 3.0 GHz
2. VSWR_____1.25:1 MAX
3. ISOLATION_____20 dB MIN
4. INSERTION LOSS_____0.4 dB MAX
5. TEMPERATURE:
OPERATING_____ -54° TO +100°C
STORAGE_____ -54° TO +100°C

TAB HEIGHT CHART	
OPTION NO.	HEIGHT (NOM.)
A	.065
B	.075
C	.090
D	.100
E	.120

NOTES:

1. TABS ARE .005±.001 THK Be Cu, GOLD PLATED.
2. CASE: STAINLESS STEEL NICKEL PLATED.

QTY	FSCH	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION
PARTS LIST				
FRACTIONS DECIMALS ANGLES XX± .01 ± .XXX± .005		DATE		
MATERIAL		APPROVALS		
FINISH		DRAWN S. REED		
NEXT ASSY		CHECKED		
USED ON		ISSUED		
APPLICATION		SCALE		
203-0133-001		SDI2730-X		
1CY63		DVG. NO. 205-2229-001		
REV.		REV.		
B		205-2229-001		
SHEET		SHEET		

SIERRA MICROWAVE TECHNOLOGY	
OUTLINE FOR SDI2730-X	