



Model: SW-T200-2S

Description:..... SP2T, Reflective, PIN-Switch

Operating Frequency:..... 1 - 18 GHz

Insertion Loss:

1 – 10 GHz	10 - 18 GHz
1.8 dB Max	2.4 dB Max

Isolation:

1 – 10 GHz	10 - 18 GHz
70 dB Min	60 dB Min

VSWR (Path “ON”):..... 1.7:1 Max

Rise/Fall Time (10% to 90% RF, 90% to 10% RF):..... 10 ns Max

On/Off Time (50% TTL to 90% RF, 50%TTL to 10% RF):..... 50 ns Max

Phase Error (Port-to-Port):..... 10° max

Operating Power:..... CW/AVG..... +30dbm Max

..... Peak..... 10W @ 1µs-PW Max

Control Input Characteristics:..... TTL /Unit-Load, Floating-High

Control Logic:..... 2-Controls, Logic “0” = RF Path “ON”

Power Supplies:..... +5(±0.25) V @ 70mA Max

..... -12(±0.5) V @ 50mA Max

Connectors (RF):..... SMA (f), Removable

Connectors (Supplies/Controls)..... Solder Pins

Impedance:..... 50 Ohms Nominal

Quality:..... Best-Commercial-Grade

Environmental Ratings:

Temperature:..... {Operating: -55°C to +95°C} & {Storage: -60°C to +110°C}

Humidity:..... MIL-STD-202F, Method 103B, Cond. B (96 hours at 95% R.H.)

Shock:..... MIL-STD-202F, Method 213B, Cond. B (75G, 6mSec)

Vibration:..... MIL-STD-202F, Method 204D, Cond. B (.06” double amplitude, or 15G)

Altitude:..... MIL-STD-202F, Method 105C, Cond. B (50,000 Feet)

Temp. Shock:..... MIL-STD-202F, Method 107D, Cond. A (5 cycles)

Available Options:

(Units with listed options here may be subject to some specification tradeoffs from the standard, consult factory)

■ **Supply Voltages**

A1 [+5(±0.25)V / -5(±0.25)V]

A2 [+5(±0.25)V / -15(±0.5)V]

A3 [+12(±0.5)V / -12(±0.5)V]

A4 [+15(±0.5)V / -15(±0.5)V]

■ **RF Connectors**

B1 [J1 & J2 Ports with SMA(M)]

B2 [All SMA (M)]

B3 [COM Port with SMA(M)]

■ **Control Connectors**

C1 [SMC(Jack), 50 Ω]

C2 [SMB(Jack), 50 Ω]

■ **Control Impedance**

D1 [50 Ω, Internally Terminated]

■ **Control Function**

F1 [Inverse Logic, (“1” = Path “ON”)]

F2 [Single Toggle Control (“1” for J1 path “ON”)]

■ **Video Suppression Filter**

G1 [VF @ COM Port <> 0.25 dB additional Loss]

G2 [VF @ J1 & J2 Ports <> 0.25 dB additional Loss]

G3 [VF @ All Ports <> 0.5 dB additional Loss]




Universal Microwave Components Corp.

5702-D General Washington Drive Alexandria, VA 22312 <> Web: www.umcc111.com

E-mail: sales@umcc111.com <> Tel: (703) 642-6332 <> Fax: (703) 642-2568

Model: SW-T200-2S

Outline

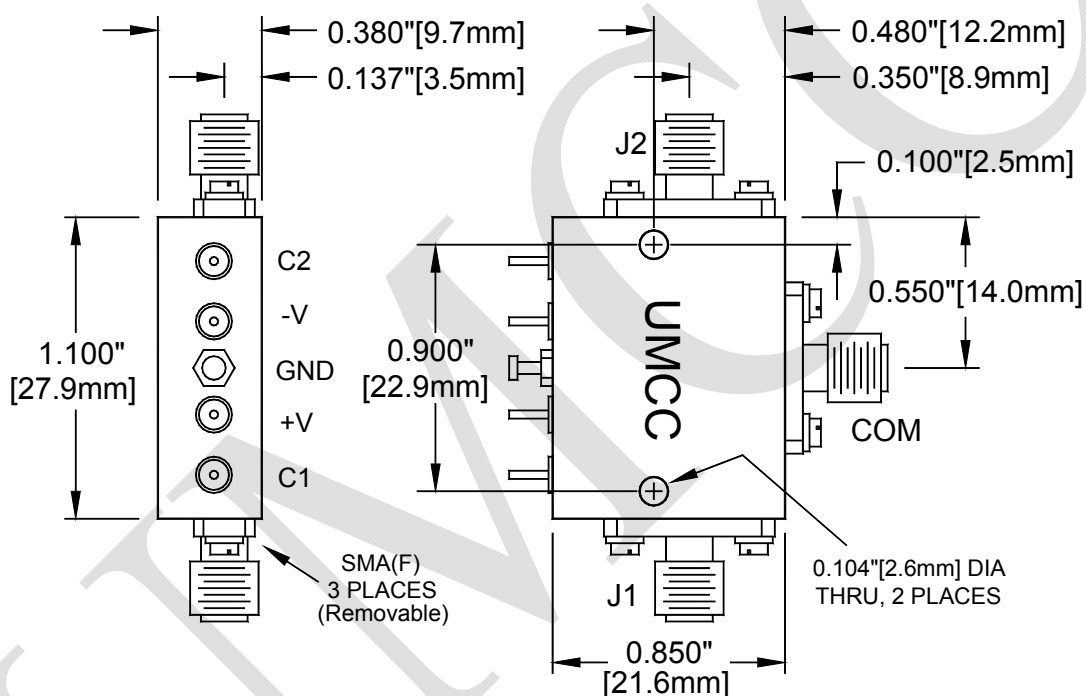

Weight	Tolerances
0.7 oz [19.8 g]	±0.015" [±0.38mm]