


Drop-in Circulator

ELECTRICAL SPECIFICATION

Product Model:	VDC-092096-2
Frequency Range (MHz):	925-960
Isolation (dB) min:	23 Room Temp (+25°C±10), 20 Over Temp (-30°C~+85°C)
Insertion Loss (dB) max:	0.25 Room Temp (+25°C±10), 0.30 Over Temp (-30°C~+85°C)
VSWR max:	1.15 Room Temp (+25°C±10), 1.20 Over Temp (-30°C~+85°C)
Impedance (Ω):	50
Forward & Reverse Power (W):	250
Operating Temp. Range (°C):	-30~+85
Storage Temperature (°C):	-45~+100

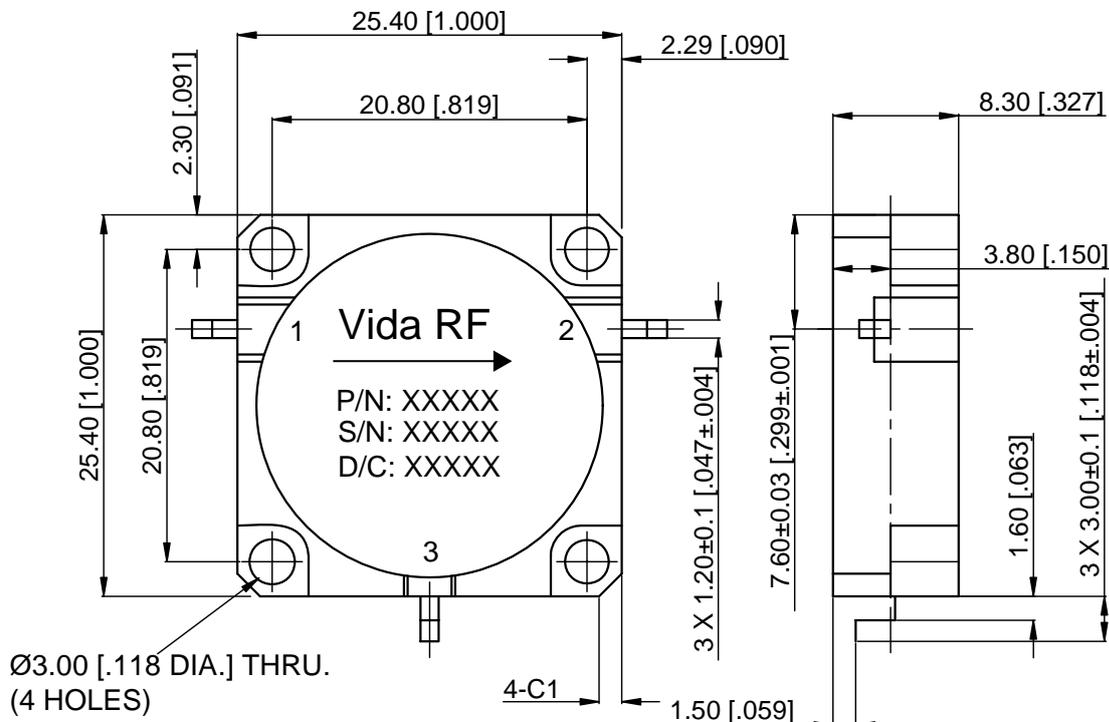

Drawn: T. P 08/29/12	Title: Drop-in Circulator
Checked: D. R 08/29/12	
Approved: S. K 08/29/12	

Tel: 877-777-8432
www.vidarF.com

Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only.
Unless Otherwise Specified tolerance are:

.XX	±0.13 [0.005"]
.X	±0.20 [0.008"]
X	±0.50 [0.019"]
.X°	±1°
X°	±2°

Cage Code 6KQ83	Part No: VDC-092096-2
View: 	Size: A4 Scale: 2:1 Sheet: 1/1 Rev: A