






Standards
NF C 96-315
MIL-DTL-39030

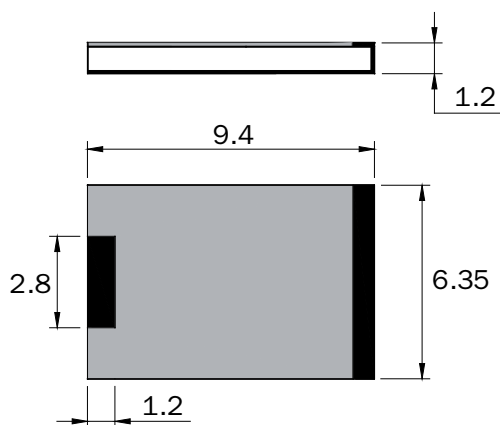

Substrate	AlN
Resistive film	Thick film
Protection film	Epoxy
Contacts finition	Silver over Nickel barrier

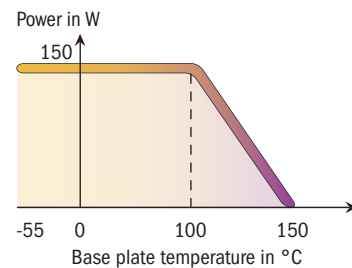

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance ($\Omega \pm 5\%$)	Max VSWR
45-0045Y	4	150	50	1.20*

* VSWR ≤ 1.10 at 3GHz



Available on Tap and Reel Packaging

mm	inch
1.2	0.047
2.8	0.110
6.35	0.250
9.4	0.370