



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

Approval Sheet For Product Specification

Issued Date:

Product Name: IF SAW Filter 140 MHz (SMD 13.3mmX6.5mm)

TST Parts No.:TB0439A

Customer Parts No.:_____

Company:_____

Division:_____

Approved by :_____

Date:_____

Checked by:_____ Andy Lee

Approval by:_____ Francis Chen

Date:_____ 2007/01/05



TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: tstsales@mail.taisaw.com Web: www.taisaw.com

IF SAW Filter 140 MHz SMD 13.3mmX6.5mm

MODEL NO.: TB0439A

Rev. No. 1

A. MAXIMUM RATING:

1. Operating Temperature: -5 °C ~ +85 °C
2. Storage Temperature: -55 °C ~ +80 °C
3. Input Power Level: 10dBm


RoHS Compliant
Lead free
Lead-free soldering

B. Characteristics :


1. Ambient Temperature: 25 °

Characteristics		Value			Note.
		Min.	Typ.	Max.	
Center frequency	F_c MHz	-	140.0	-	-
Maximum Insertion loss	I.L. dB	-	9.20	10.75	-
1dB Bandwidth	MHz	12.0	15.1	-	-
3dB Bandwidth	MHz	15.0	17.6	-	-
40dB Bandwidth	MHz	-	26.7	40.0	-
Passband Ripple ($F_c \pm 6$ MHz)	MHz	-	0.6	1.0	-
Group Delay Ripple ($F_c \pm 6$ MHz)	nS	-	75	180	-
Temp Coefficient	ppm/° C	-	-94	-	-

C. TEST FIXTURE :

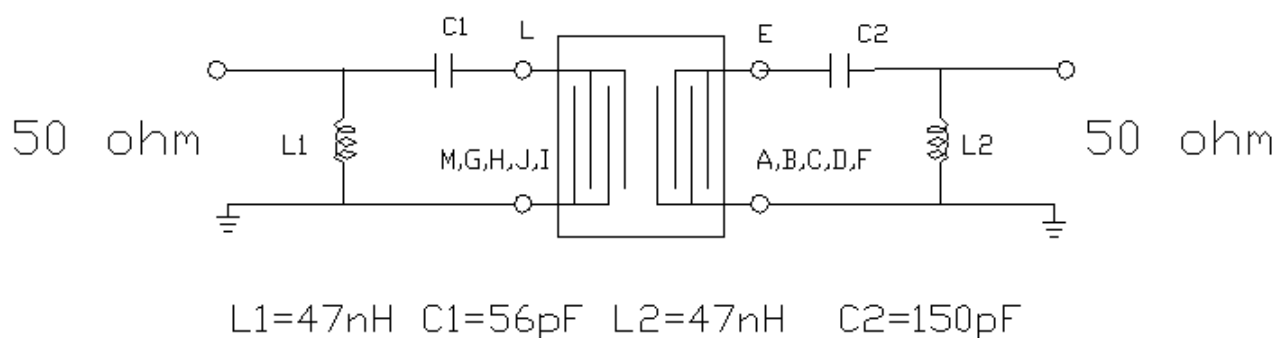

C.OUTLINE DRAWING:

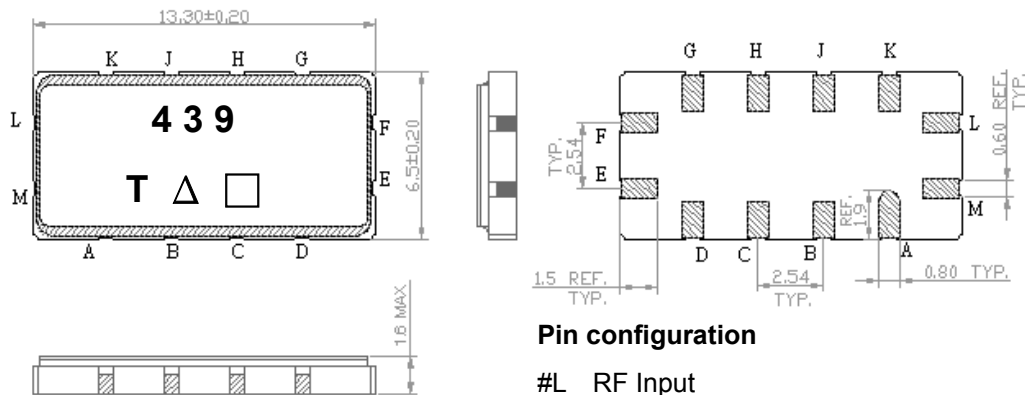

Pin configuration

- #L RF Input
- #M RF Input ground
- #E RF Output
- #F RF Output ground
- #A,B,C,D,G,H,J,K To be ground
- : Week Code (Follow the table from planner each year)
- Unit : mm
- △ : Product / Year Code

Year	2005 2009	2006 2010	2007 2011	2008 2012
Product Code	B	b	<u>B</u>	<u>b</u>

D. Frequency Characteristics :

1. S21 Response

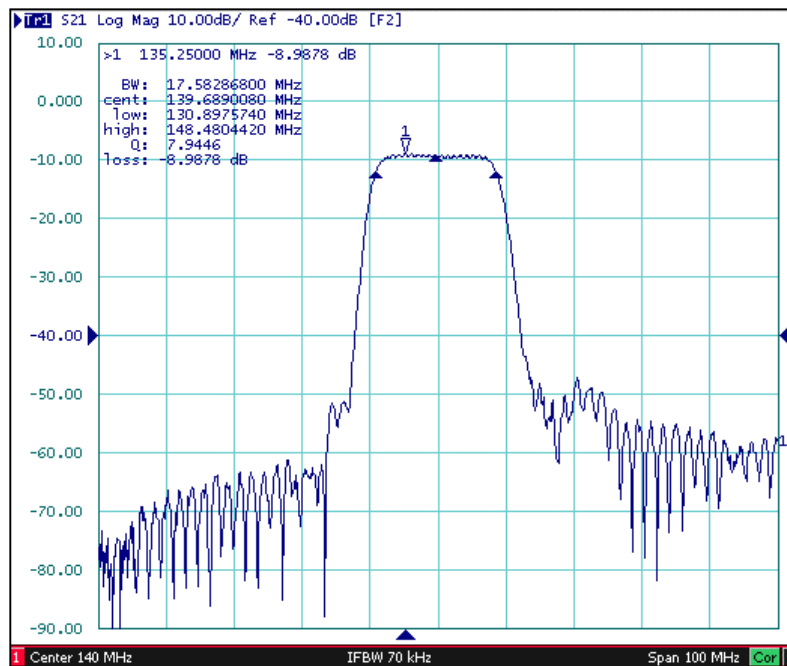


Fig1. Horizontal: 100MHz/Div Vertical: 10dB/Div

2. Pass band Ripple and Group Delay Ripple



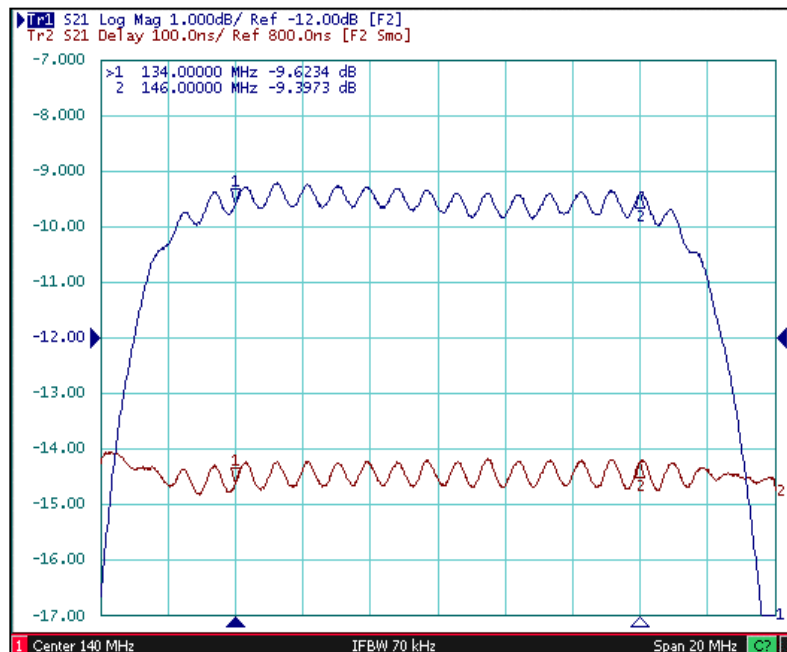


Fig2. Horizontal: 2MHz/Div; Vertical: 1dB/Div,
Vertical: 100nS/Div,

F. PCB FOOTPRINT

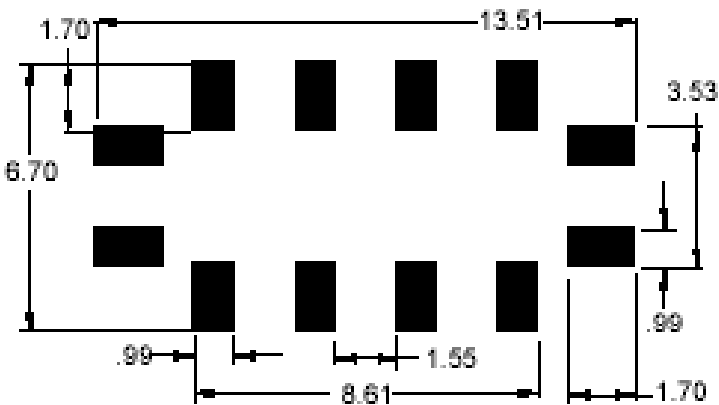

G. PACKING:
1. REEL DIMENSION

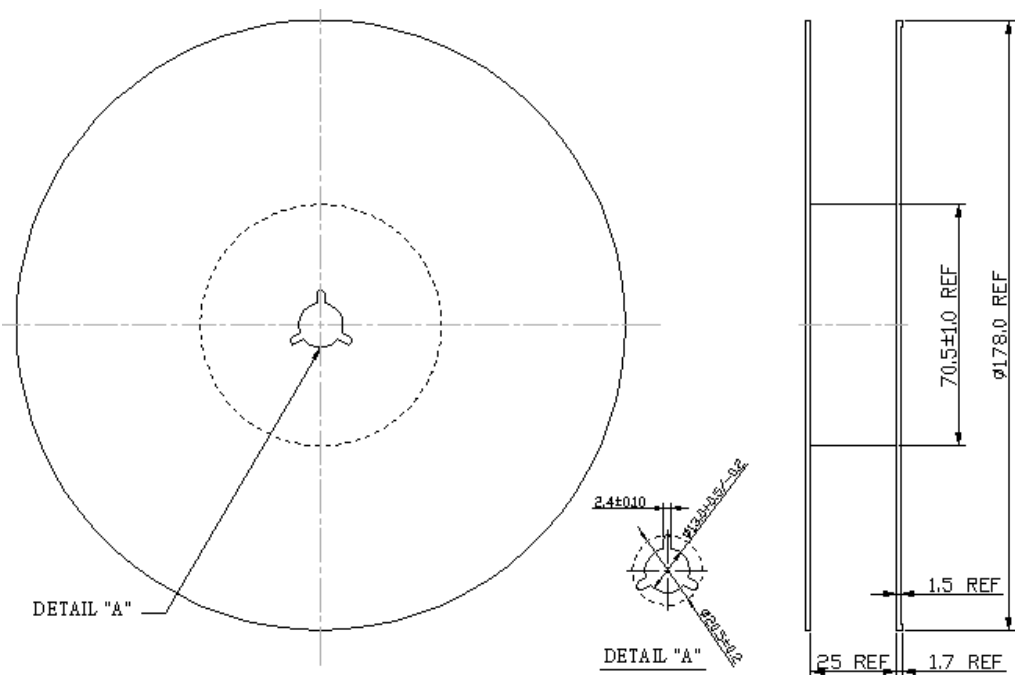

2. TAPE DIMENSION

