



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

## Product Specifications Approval Sheet

Product Name: SAW Filter 70MHz 2.25MHz BW DIP 34.7×12.7mm

TST Parts No.: TB1044A

Customer Parts No.: \_\_\_\_\_

Customer signature required
Company: _____
Division: _____
Approved by : _____
Date: _____

Checked by: Andy Yu *Andy*

Approval by: Francis Chen *Francis Chen*

Date: 12/06/2011

1. Customer signed back is required before TST can proceed with sample build and receive orders.
2. Orders received without customer signed back will be regarded as agreement on the specifications.
3. Any specifications changes must be approved upon by both parties and a new revision of specifications shall be released to reflect the changes



# TAI-SAW TECHNOLOGY CO., LTD.

No. 3, Industrial 2nd Rd., Ping-Chen Industrial District,  
Taoyuan, 324, Taiwan, R.O.C.

TEL: 886-3-4690038 FAX: 886-3-4697532

E-mail: [tstsales@mail.taisaw.com](mailto:tstsales@mail.taisaw.com) Web: [www.taisaw.com](http://www.taisaw.com)

SAW Filter 70 MHz(BW=2.25MHz) DIP 34.7mmx12.7mm

MODEL NO.: TB1044A

REV.1.0

## A. MAXIMUM RATING:

1. Operating Temperature: 0 °C ~ +70 °C
2. Storage Temperature: -40 °C ~ +85 °C
3. Input power: 10dBm



## B. Characteristics :


Electrostatic Sensitive Device (ESD)

Ambient Temperature: 25 °C


Characteristics	Value			Note
	Min.	Typ.	Max.	
<b>Center frequency</b> $F_c$ MHz	69.9	70.0	70.1	-
<b>Minimum Insertion loss</b> I.L. dB	-	20.6	22	-
<b>1dB BW</b> MHz	2.25	2.32	-	
<b>30dB BW</b> MHz	-	2.88	3.0	
<b>Attenuation</b> (Reference to Max IL)				
<b>Fc-5MHz , Fc+5MHz</b> dB	35	53	-	-
<b>Fc-50MHz ~ Fc-5MHz</b> dB	40	43	-	-
<b>Fc+5MHz ~ Fc+50MHz</b> dB	40	56	-	-
Temp Coefficient ppm/K	-	-0.032	-	-
<b>Matching:</b>				
1.The input of the filter will be matched to <u>50 ohm</u>				
2.The output of the filter will be matched to <u>50 ohm</u>				

## D. FREQUENCY CHARACTERISTICS :


### 1.S21 Response: (span : 20MHz)

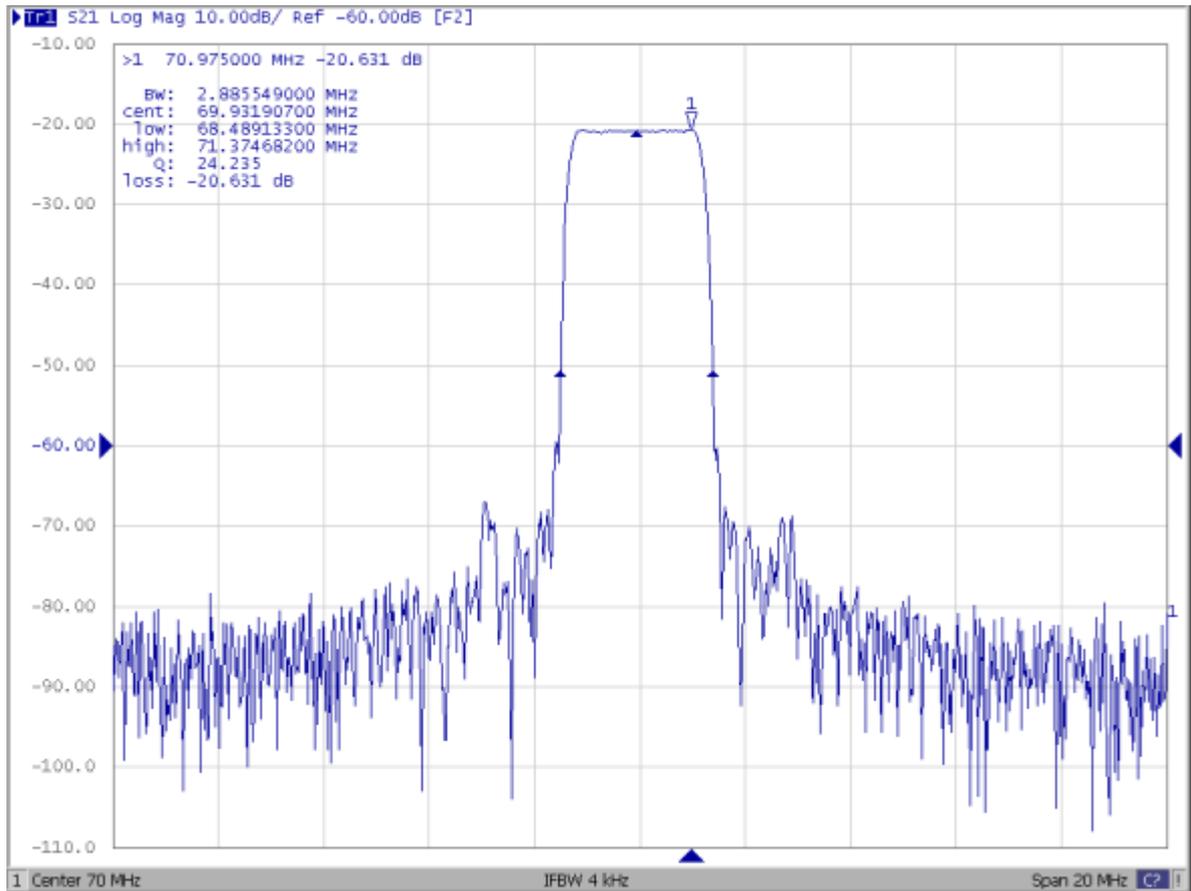


### 2. Pass-band Response: (span : 3MHz)

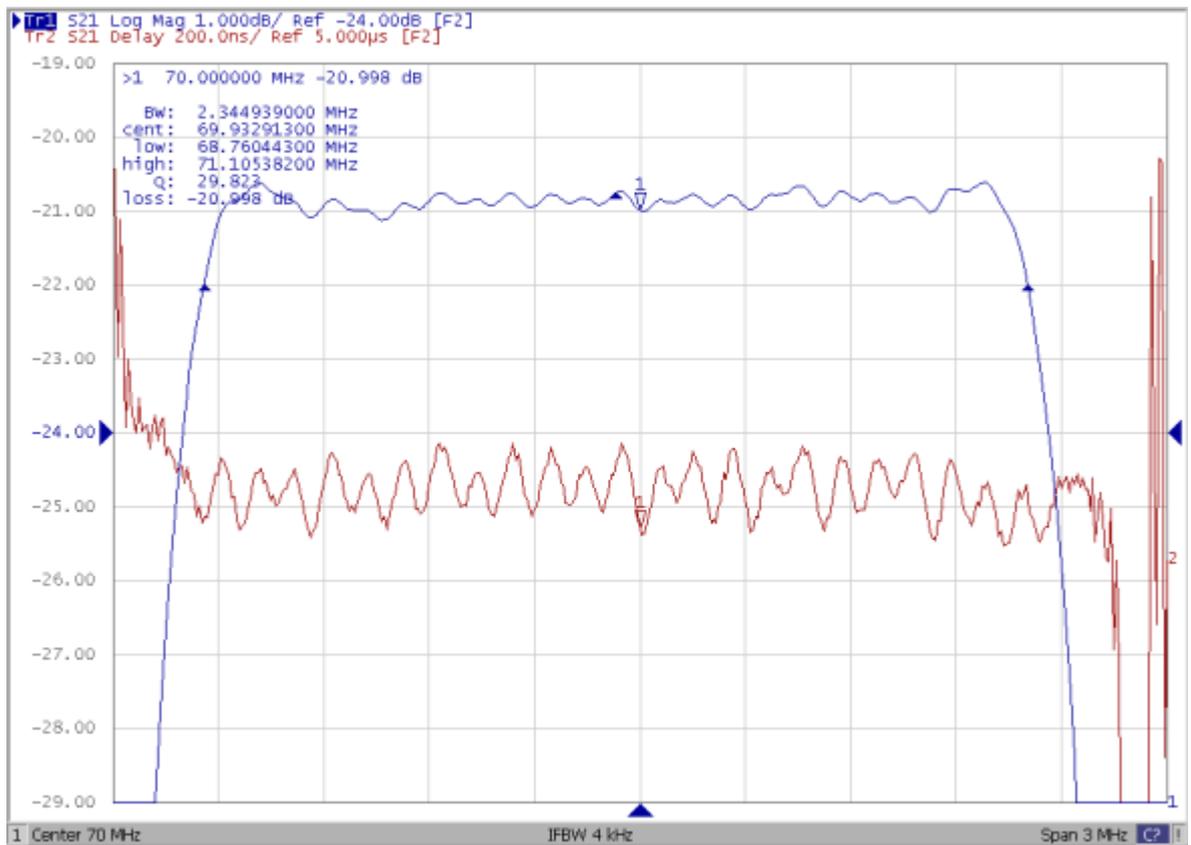

### 3. S21 Response: (span : 120MHz)

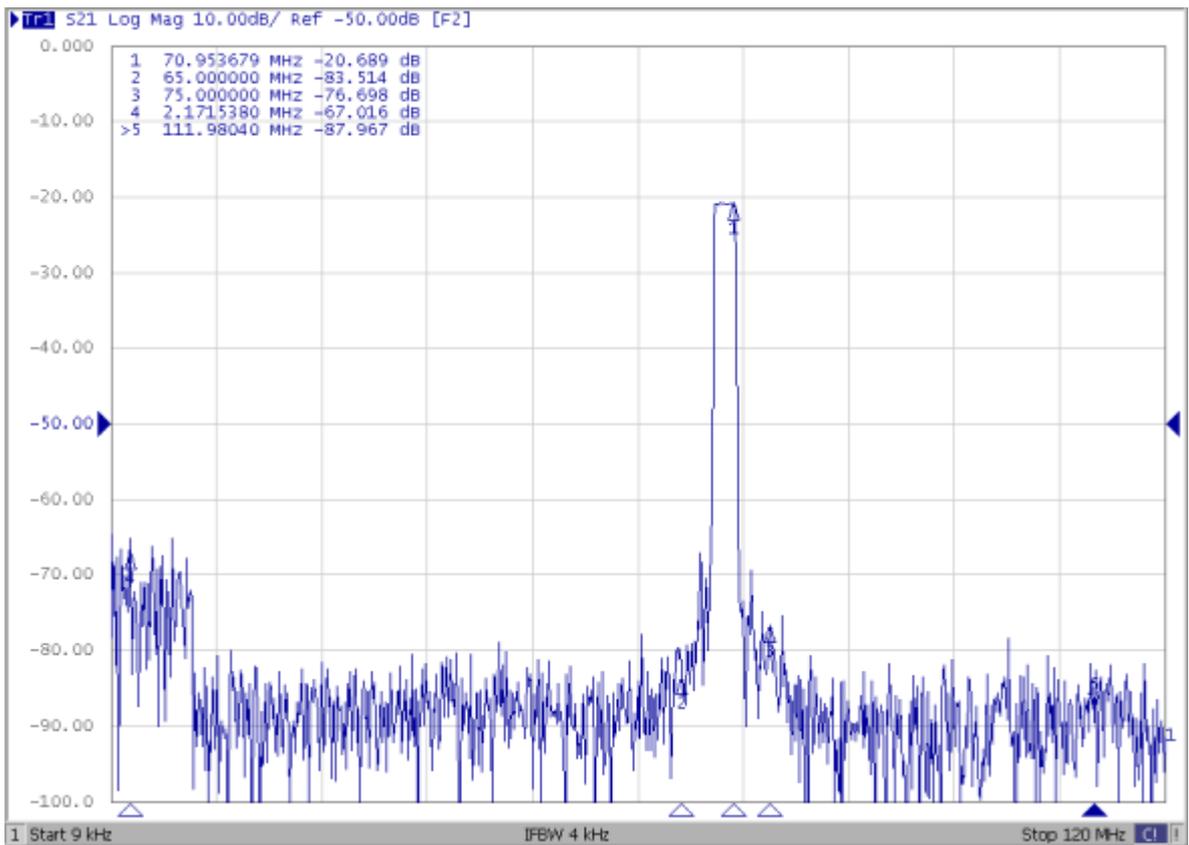


### 4. S11、S22 Smith Chart (span : 20MHz)

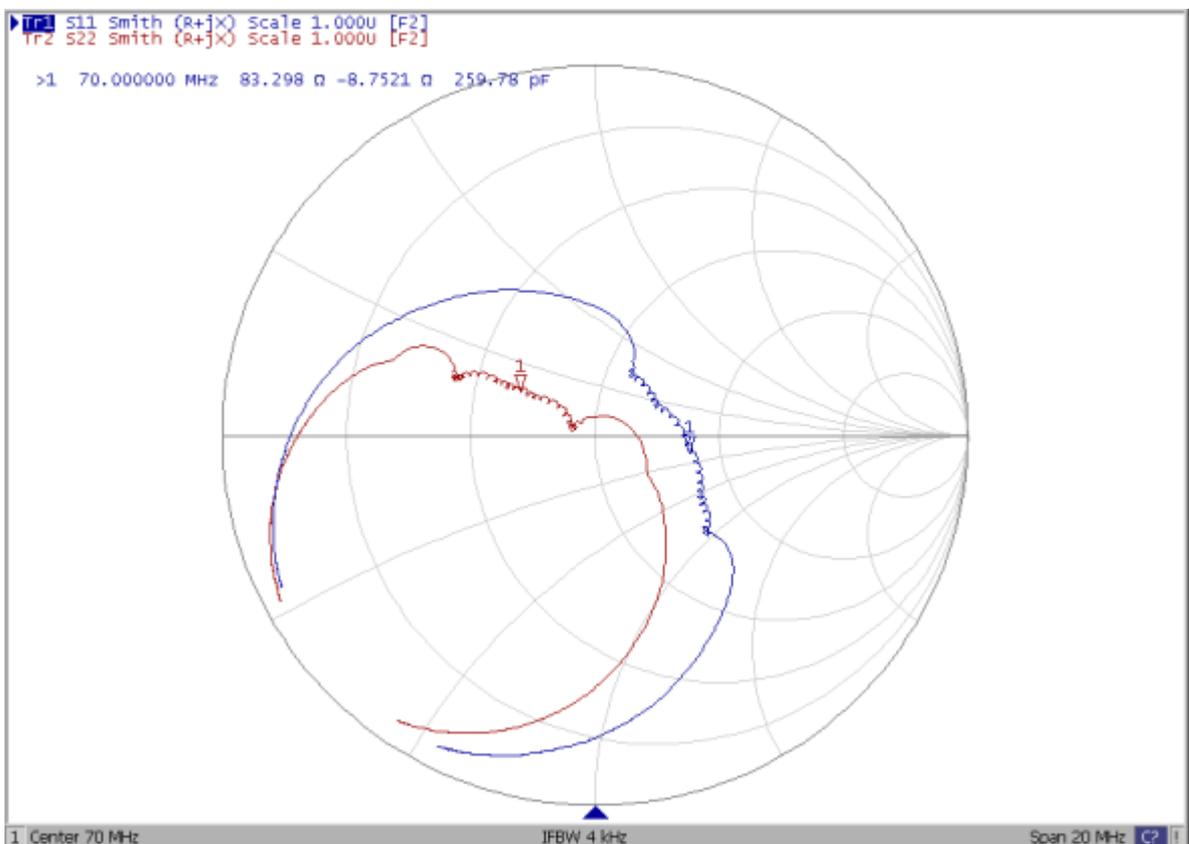


E. MEASUREMENT CIRCUIT

$Z_{in} = Z_{out} = 50 \text{ ohm}$

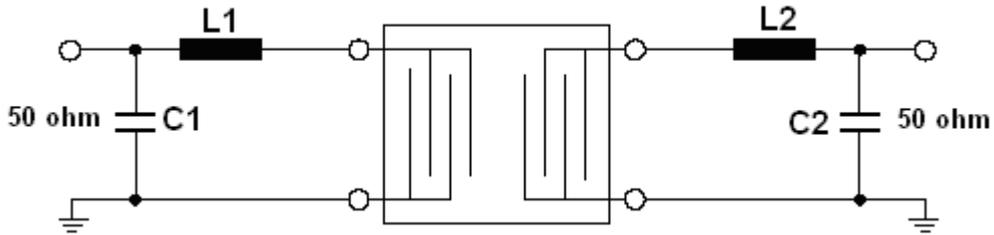

$L1=390\text{nH}$ ,  $C1=82\text{pF}$ ,  $L2=352\text{nH}$ ,  $C2=100\text{pF}$

F. OUTLINE DRAWING:

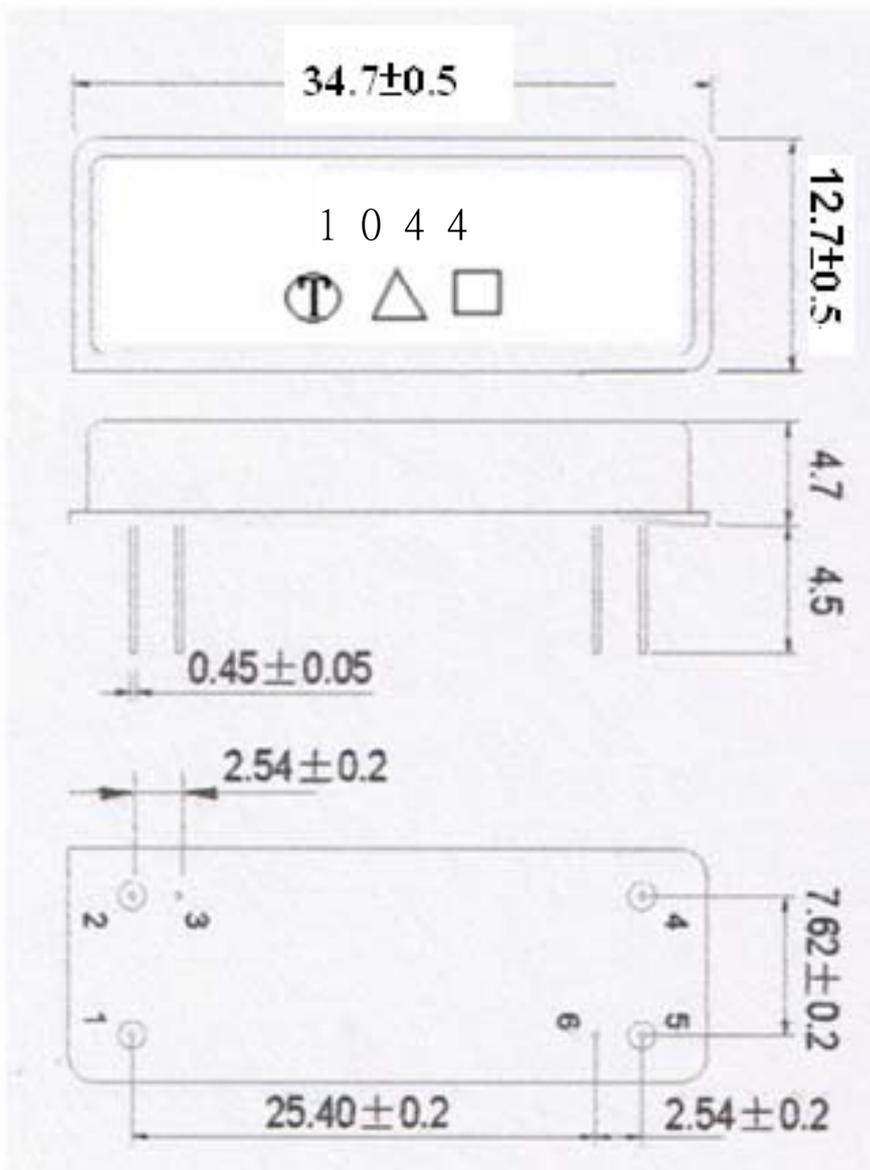

- Pin 1: RF input
- Pin 4: RF output
- Pin 3,6: Case Ground
- Pin 2, 5: Ground

□: Week Code (Follow the table from planner each year)

Unit : mm

△ : Product / Year Code

Year	2009	2010	2011	2012
Product Code	B	b	<u>B</u>	<u>b</u>

### G. RECOMMENDED REFLOW PROFILE:

