


REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		

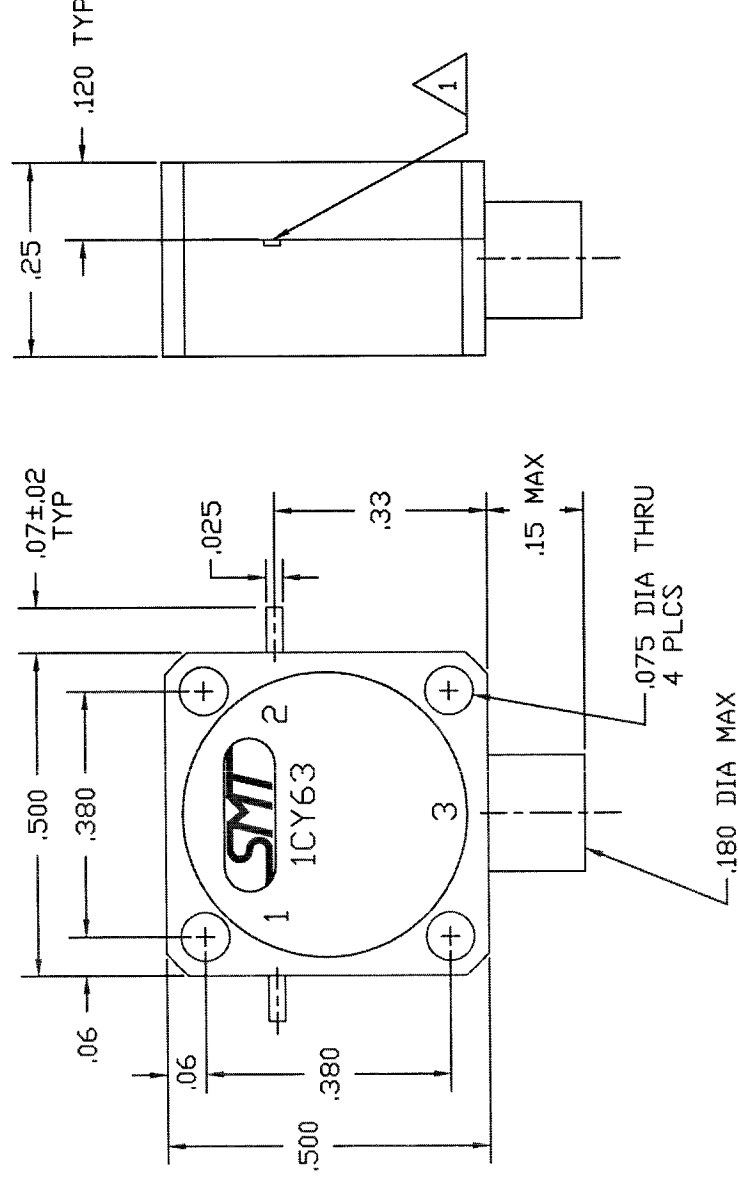

SPECIFICATIONS

1. FREQUENCY RANGE_____ 3.5 TO 3.6 GHz
2. VSWR_____ 1.25:1 MAX
3. ISOLATION_____ 20 dB MIN
4. INSERTION LOSS_____ 0.4 dB MAX
5. TEMPERATURE
 OPERATING_____ -54° TO +100°C
 STORAGE_____ -54° TO +100°C
6. LOAD RATING_____ 4 WATTS MIN.
 @ 85°C HEATSINK TEMPERATURE

QTY	FSCM	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION		MATERIAL SPECIFICATION	
PARTS LIST						
FRACTIONS DECIMALS ANGLES # XXX/100 .XXX±.005 ±			DATE			
MATERIAL			APPROVALS			
FINISH			DRAWN			
USED ON			CHECKED			
NEXT ASSY			ISSUED			
APPLICATION			SCALE			
2. CASE, STAINLESS STEEL NICKEL PLATED.			SIERRA MICROWAVE TECHNOLOGY			
1. TABS ARE .005±.001 THK Be Cu SN63 SOLDER TINNED.			OUTLINE FOR SDI3536E			
NOTES:			SIZE FSCM NO. DVG. NO. REV.			
			B 1CY63 205-1516-001			
			SHEET			