

800 to 3500MHz – Dual Junction Coaxial Circulator

Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

RF Characteristics

Model Number	Freq. Range (MHz)	Insertion Loss (1-2) Max(dB)	Isolation (2-1) Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCDC5628A869T894NF	869 ~ 894	0.6	45	1.2	200	200	N-F	-30 ~ +70
UIYCDC5628A925T960SF	925 ~ 960	0.6	45	1.2	100	100	SMA-F	-30 ~ +70
UIYCDC5628A1350T1400SF	1350 ~ 1400	0.6	40	1.25	150	150	SMA-F	-40 ~ +85
UIYCDC5628A1400T1600NF	1400 ~ 1600	0.7	40	1.25	200	200	N-F	-30 ~ +70
UIYCDI2528A1710T1785SF	1710 ~ 1785	0.6	40	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC5628A1700T1900NFTNM	1700 ~ 1900	0.7	40	1.25	200	200	N-F to N-M	-30 ~ +70
UIYCDC5628A1900T2200NFTNM	1900 ~ 2200	0.7	40	1.25	200	200	N-F to N-M	-30 ~ +70
UIYCDC5628A2110T2170SF	2110 ~ 2170	0.6	45	1.25	100	100	SMA-F	-30 ~ +70
UIYCDC5628A2300T2500SF	2300 ~ 2500	0.6	45	1.2	100	100	SMA-F	-40 ~ +85
UIYCDC5628A2400T2600SF	2400 ~ 2600	0.6	45	1.2	100	100	SMA-F	-40 ~ +85
UIYCDC5628A2500T2700NF	2500 ~ 2700	0.6	45	1.2	200	200	N-F	-40 ~ +85
UIYCDC5628A2900T3100NF	2900 ~ 3100	0.7	40	1.3	200	200	N-F	-40 ~ +85

² List are specify frequency range and other ranges available.

² Please enter below information when inquiry and mark * is must.


* 1. The specific frequency range

* 2. Power handling (Forward, Reverse, Peak, etc.)

* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)

4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

Mechanical Drawing

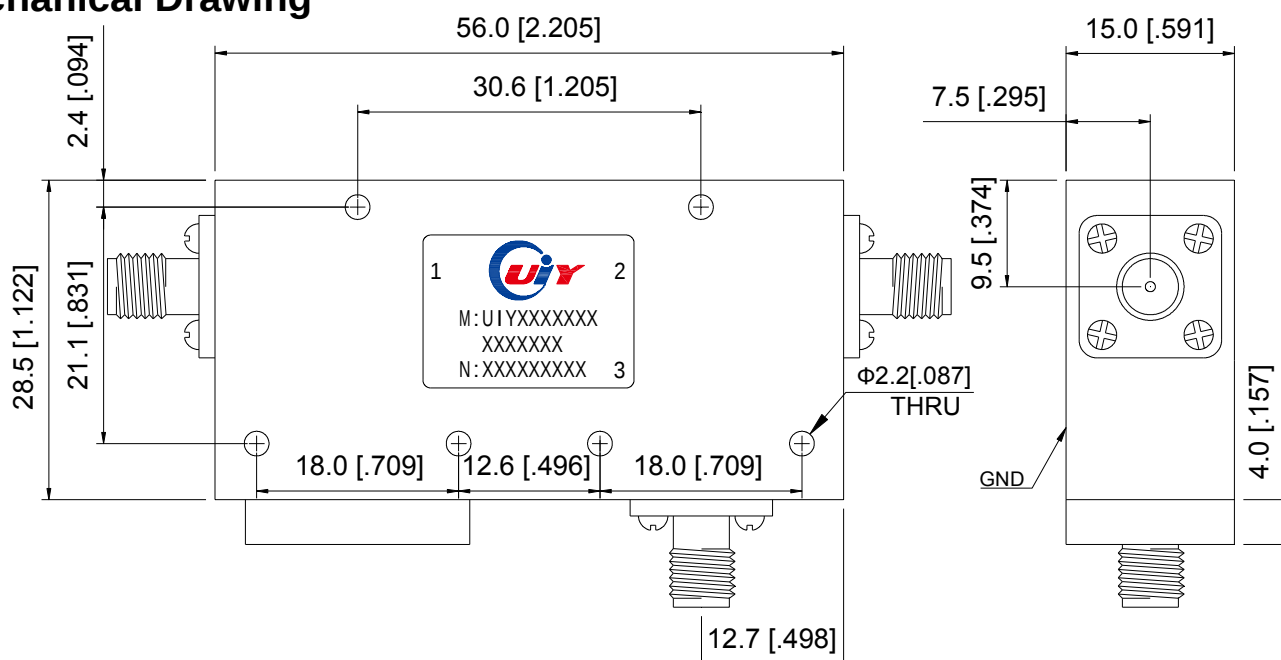

Unit: mm/ inch, General part tolerance is ± 0.2 mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com