


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

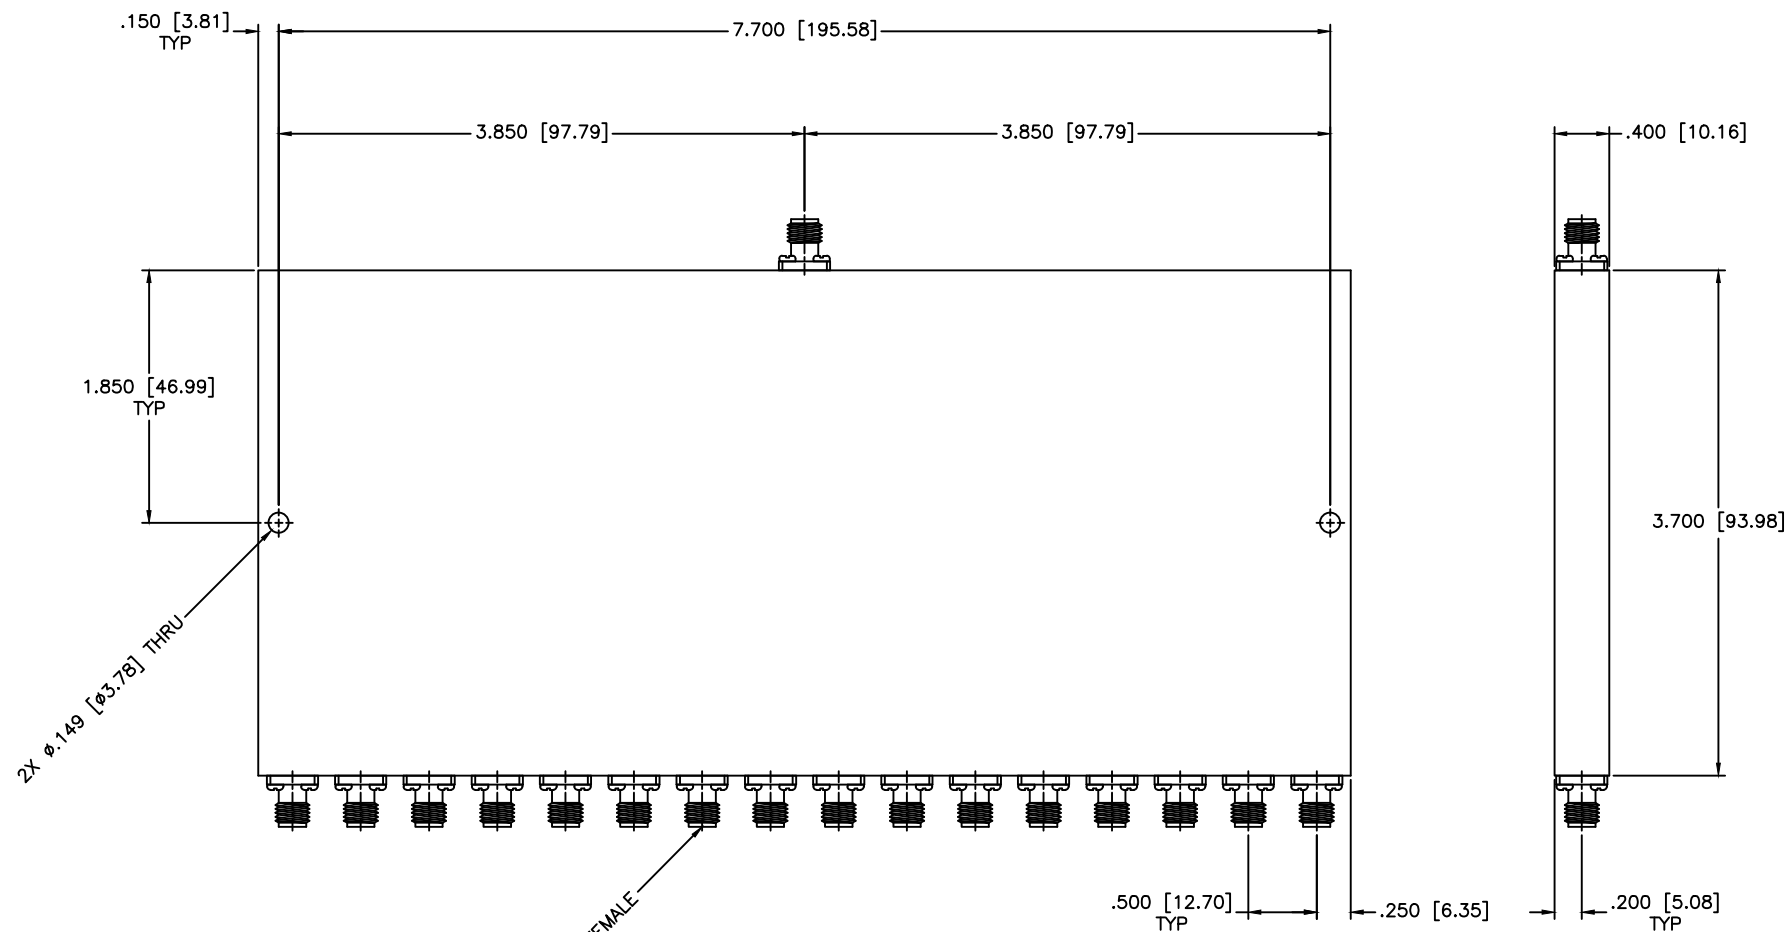

SPECIFICATIONS

Frequency Range: 6–18 GHz
 VSWR: 1.65:1 Max.
 Amplitude Balance: ± 1.0 dB Max.
 Phase Balance: ± 5 Deg. Max.
 Insertion Loss: 5.8dB Max.
 Isolation: 14dB Min.
 Power: 10W (Load vswr @ 1.2)

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	08-10-2010
APPROVED:	DATE:
T. Nguyen	08-10-2010

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: $\pm 1/64$
 DECIMALS: $\pm 0.01 \pm 0.005$
 ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

16-WAY POWER DIVIDER

PART NO.

PS16-16

CAGE CODE:

0D2L5

SIZE:

A

REV:

N/A

DWG NO.

85035

DO NOT SCALE THE DRAWING

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

