



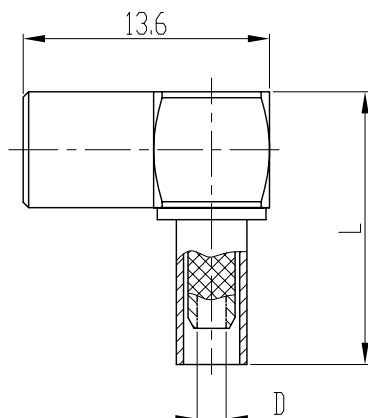

剥线尺寸
stripping dimensions

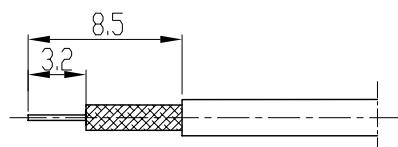

产品型号 type	D	L	电缆型号 cable type	备注 remark
SMB-KW2	Ø0.9	13.7	SFF-50-1、RG178/U	机加接触头 machining plug time
SMB-KW2A				
SMB-KW3	Ø1.6	13.1	SFF-50-1.5-1、RG316/U SYV-50-2-1	机加接触头 machining plug time
SMB-KW3A-1		14.3		
SMB-KW3C		16.2		
SMB-KW4	Ø2.3	15.8	SFF-50-2-1	
SMB-KW5	Ø3.1	19.8	SFF-50-3-1、SYV-50-3	

Electrical Characteristics:

- Characteristic Impedance: 50Ω
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 6.0\text{ m}\Omega$
Out conductor: $\leq 1.0\text{ m}\Omega$
- Insulation resistance: $\geq 1000\text{ M}\Omega$
- Insulator withstanding: 750V
- VSWR: ≤ 1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50Ω
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 6.0\text{ m}\Omega$
外导体: $\leq 1.0\text{ m}\Omega$
- 绝缘电阻: $\geq 1000\text{ M}\Omega$
- 介质耐压: 750V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

Application: MIL-C-39012/68A

执行标准: MIL-C-39012/68A

Material&Finishing

- Center contact:
Female: beryllium copper, gold plated
- Body: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

 		SCALE		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		2.5:1		
	NAME	DATE	SMB-KW2 RF COAXIAL CONNECTOR	
DRAWN				
CHECKED				
APPROVED			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	