



A Tallysman Accutenna™ TW3400/TW3402 GPS/GLONASS Antenna

The TW3400/TW3402 employs Tallysman's unique *Accutenna*™ technology covering the GPS L1, GLONASS L1 and SBAS (WAAS, EGNOS & MSAS) frequency band (1574 to 1606 MHz). They are especially designed for precision industrial, agricultural and military applications. . They provide truly circular response over the antennas' entire bandwidth thereby producing superior multipath signal rejection.

The TW3400/TW3402 feature a highly circular dual-feed wideband patch element, with a two stage Low Noise Amplifier, comprised of one input LNA per feed, a mid section SAW to filter the combined output, and a final output gain stage. This configuration provides excellent axial ratio that is constant across the full frequency band. An optional tight pre-filter is available on the TW3402 to protect against saturation by high level sub-harmonic and L-Band signals.

The TW3400/TW3402 is housed in a permanent mount industrial grade weather-proof enclosure. Two options for pole mounting are available an L-bracket (P/N#23-0040-0) or a pipe mount (P/N#23-0065-0).


Applications

- High Accuracy & Mission Critical Global Positioning
- Precision Agriculture, Mining & Construction
- Military & Security
- Avionics
- Law Enforcement & Public Safety
- Fleet Management & Asset Tracking



TW3400 Dimensions (mm)

Flat radome is shown, Conical Radome also available

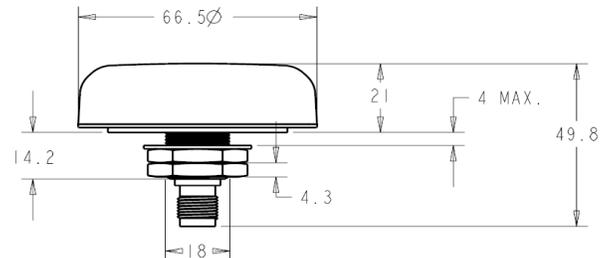

Features

- Great axial ratio: 1 dB typ.
- Low noise LNA: 1 dB
- High rejection SAW filter
- High gain LNA: 28 dB typ.
- Low current: 10 mA typ.
- Wide voltage input range: 2.5 to 16 VDC
- IP67 weather proof housing

Benefits

- Excellent circular polarisation
- Excellent multipath rejection
- Excellent signal to noise ratio
- Great out of band signal rejection
- Increased system accuracy
- Ideal for harsh environments
- RoHS compliant



TW3400/TW3402 GPS/GLONASS Antenna

Specifications

Antenna

Architecture	Dual, Quadrature Feeds
1 dB Bandwidth	30 MHz
Antenna Gain (with 100mm ground plane)	4.25 dBic
Axial Ratio (over full bandwidth)	<1 dB @zenith., 3 dB max.

Electrical

Filtered LNA Frequency Bandwidth	1574 to 1606 MHz
Polarization	RHCP
LNA Gain	28 dB min., 1575.42 to 1606 MHz
Gain flatness	+/- 2 dB, 1575 to 1605 MHz
Out-of-Band Rejection	<1500 MHz >32 dB (TW3400) >50dB (TW3402)
	<1550 MHz >25 dB >50dB
	>1640 MHz >35 dB >75dB
VSWR (at LNA output)	<1.5:1
Noise Figure	1 dB typ. (TW3400) 3.5 dB typ (TW3402)
Supply Voltage Range (over coaxial cable)	2.5 to 16 VDC nominal (12VDC recommended maximum)
Supply Current	10 mA typ.
ESD Circuit Protection	15 KV air discharge

Mechanicals & Environmental

Mechanical Size	66.5 mm dia. x 21 mm H
Operating Temp. Range	-40 to +85 °C
Enclosure	Radome: ASA Plastic, Base: Zamak White Metal (M18x1thread)
Weight	150 g
Attachment Method	Permanent 3/4" (19mm) through hole mount
Environmental	IP67 and RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G

Ordering Information

Legacy Part Numbers:

TW3400 - GPS/Glonass Antenna	32-3400-xx-yy	
TW3402 - GPS/Glonass Antenna, with pre-filter	32-3402-xx-yy	
Connector:	xx = 00 TNC	xx = 01 N Type (premium applies)
Radome Colour	yy = 10 Dark grey low profile	yy = 11 White low profile

* As a result of a growing product portfolio, Tallysman has rationalized its part number system. No changes have been made to the mechanical or electrical properties of these products. Where administratively possible, please use the following Part Numbers.

TW3400 - GPS/GLONASS antenna 33-3400-xx-yy-zzzz TW3402 - 33-3402-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome, and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/orderingguide.php>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

106 Schneider Road, Unit 3
Ottawa ON K2K 1Y2 Canada Tel 613 591 3131 Fax 613 591 3121
sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved.

Rev 4.1