

Directional Coupler

50Ω

500 to 1350 MHz

ZADC-17-14HP


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	0.25A
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

INPUT	S
OUTPUT	1
COUPLED	2

Outline Drawing

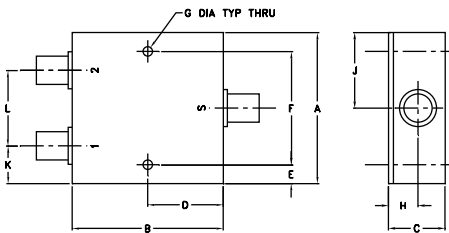

Outline Dimensions (inch)

A	B	C	D	E	F	G
2.00	2.00	0.75	1.00	0.25	1.500	0.125
50.80	50.80	19.05	25.40	6.35	38.10	3.18

H	J	K	L	wt
0.39	1.00	0.50	1.00	grams
9.91	25.40	12.70	25.40	170.0

Features

- excellent mainline loss, 0.8 dB typ.
- excellent VSWR, 1.06:1 typ.
- useable over 300-2000 MHz
- input power up to 10W
- protected by US Patents 7,049,905 & 7,218,186
- DC current through input to output 0.25A Max. at 1.0 watt RF input power.

Applications

- cellular
- VHF/UHF
- instrumentation




Directional Coupler Electrical Specifications

FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT (W)
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		
$f_L - f_U$								
500-1350	16.4±0.9	±1.3	0.8	1.5	29	16	1.06	10
800-1000	15.5±0.7	±0.5	0.8	1.3	30	20	1.06	10


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
500.00	0.33	16.67	25.05	34.42	43.77	32.71
600.00	0.41	15.83	26.57	33.61	44.58	32.35
700.00	0.48	15.29	28.41	32.64	41.80	31.15
800.00	0.56	15.00	30.45	31.71	39.27	29.02
900.00	0.63	14.89	31.26	30.89	37.02	26.67
1000.00	0.71	14.97	29.63	30.32	35.50	24.44
1100.00	0.77	15.23	27.45	29.92	34.41	22.44
1200.00	0.83	15.64	25.34	29.39	33.05	20.73
1300.00	0.88	16.17	23.70	28.28	31.24	19.22
1350.00	0.90	16.55	23.01	27.42	30.31	18.54

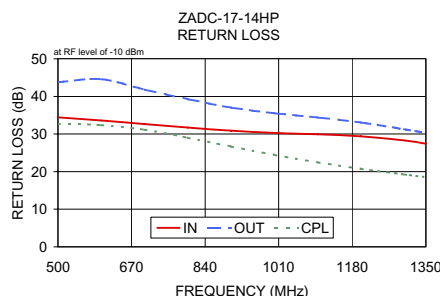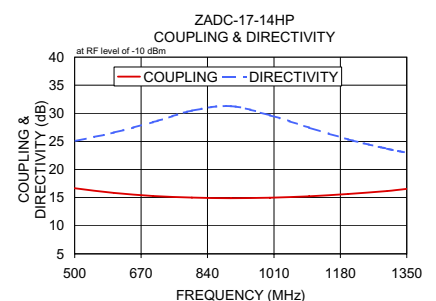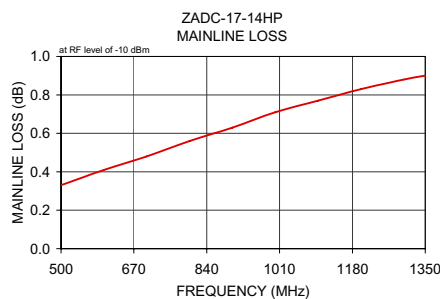

Electrical Schematic



* ELECTRICAL SCHEMATIC FOR DIRECTIONAL COUPLER THAT IS DESIGNED WITHOUT INTERNAL TRANSFORMERS.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

