




This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

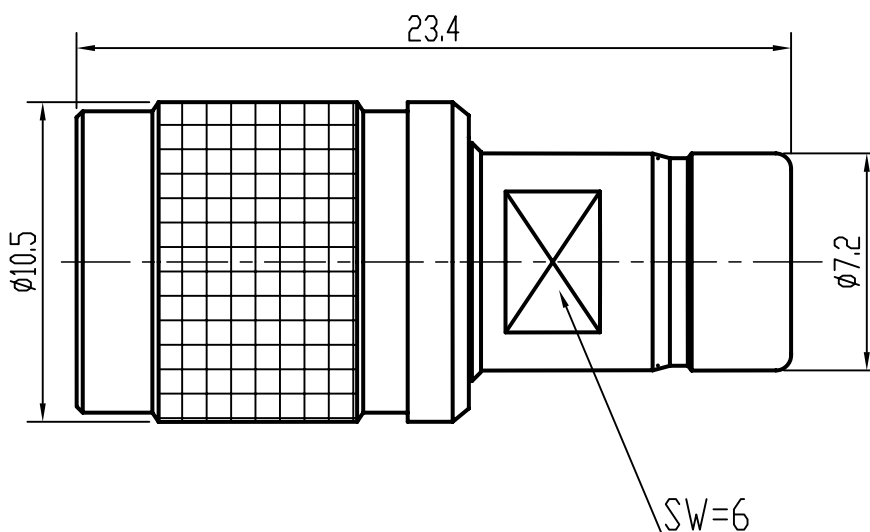

Electrical Characteristics

1. Characteristic Impedance: $50\ \Omega$
2. Frequency range: DC~18.0GHz
3. Contact resistance
Center conductor: $\leq 3.0\ \text{m}\Omega$
Out conductor: $\leq 2.0\ \text{m}\Omega$
4. Insulation resistance: $\geq 5000\ \text{M}\Omega$
5. Insulator withstanding: 1000V
6. Durability: 200cycles

Application: MIL-C-39012/55D

Material&Finishing

1. Center contact :
beryllium copper, gold plated
2. Body: brass, nickel plated
3. Insulators: PTFE
4. contact piece:
Beryllium copper, gold plated

主要性能指标

1. 特性阻抗: $50\ \Omega$
2. 频率范围: DC~18.0GHz
3. 接触电阻:
中心导体: $\leq 3.0\ \text{m}\Omega$
外导体: $\leq 2.0\ \text{m}\Omega$
4. 绝缘电阻: $\geq 5000\ \text{M}\Omega$
5. 介质耐压: 1000V
6. 插拔次数: 200次

执行标准: MIL-C-39012/55D

材料和镀层

1. 中心接触件:
铍青铜, 镀金
2. 壳体: 黄铜, 镀镍
3. 绝缘子: 聚四氟乙烯
4. 接触头: 铍青铜, 镀镍

		SCALE	CQA-JK	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
		5:1		
	NAME	DATE	RF COAXIAL ADAPTOR	
DRAWN				
CHECKED				
APPROVED				

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.