
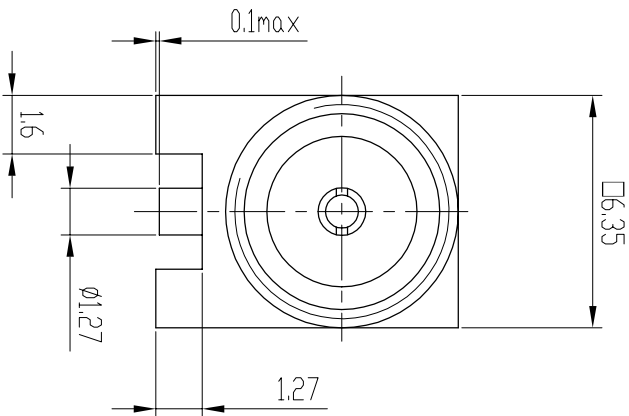


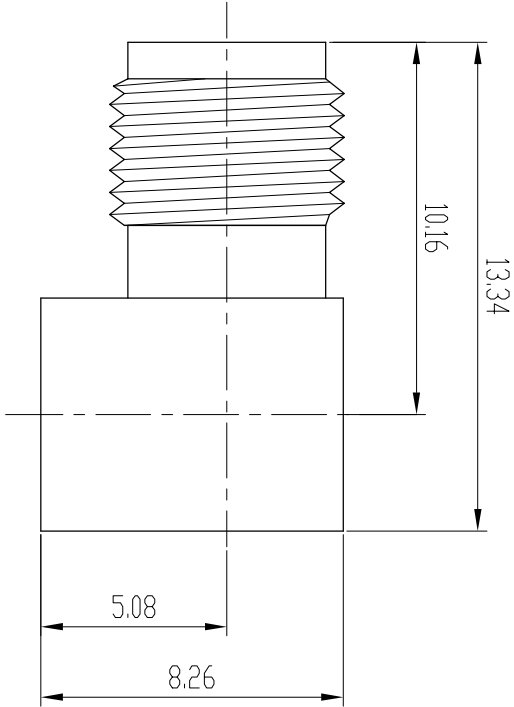

Electrical Characteristics:

1. Characteristic Impedance: 50 Ω
2. Frequency range: DC~18Ghz
3. Contact resistance
- Center conductor: $\leq 3.0\text{ m}\Omega$
- Out conductor: $\leq 2.0\text{ m}\Omega$
4. Insulation resistance: $\geq 5000\text{M}\Omega$
5. Insulator withstand: 1000V
6. Durability: 500cycles

主要性能指标:

1. 特性阻抗: 50 Ω
2. 频率范围: DC~18Ghz
3. 接触电阻:
- 中心导体: $\leq 3.0\text{ m}\Omega$
- 外导体: $\leq 2.0\text{ m}\Omega$
4. 绝缘电阻: $\geq 5000\text{M}\Omega$
5. 介质耐压: 1000V
6. 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

1. Center contact : Female:beryllium copper, gold plated
2. Body: brass, gold plated
3. Insulators: PTFE

材料和镀层

1. 中心接触件: 插孔: 铍青铜, 镀金
2. 壳体: 黄铜, 镀金
3. 绝缘子: 聚四氟乙烯

		SCALE	SMA-KW/HT	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm , TOLERANCES ARE FRACTIONS DECIMALS ANGLES X± .15 ±1° .XX± .05 XXX±
		5:1		
NAME	DATE	RF COAXIAL CONNECTOR		
DRAWN				
CHECKED				
APPROVED				
			西安富士达科技股份有限公司 XI'AN FORSTAR S&T CO.,LTD.	