

MINISMP/F 12 GHZ TERMINATION


ST1251

SPECIFICATIONS

ELECTRICAL:
FREQUENCY: 0-12 GHZ
IMPEDANCE: 50 OHMS
VSWR: 1.30:1 @ 12 GHZ TYPICAL
VOLTAGE: 325 VRMS @ SEA LEVEL
INSULATION RESISTANCE:
5,000 MEGOHMS MIN.

MECHANICAL:
MATERIAL SMP BODY: BeCu
MATERIAL SMA BODY: PASS S STEEL
CENTER CONTACTS: BeCu
PLATING: Au PER MIL-G-45204
INSULATOR: PTFE
OP. TEMP RANGE: -65° to +165°C

ROHS COMPLIANT

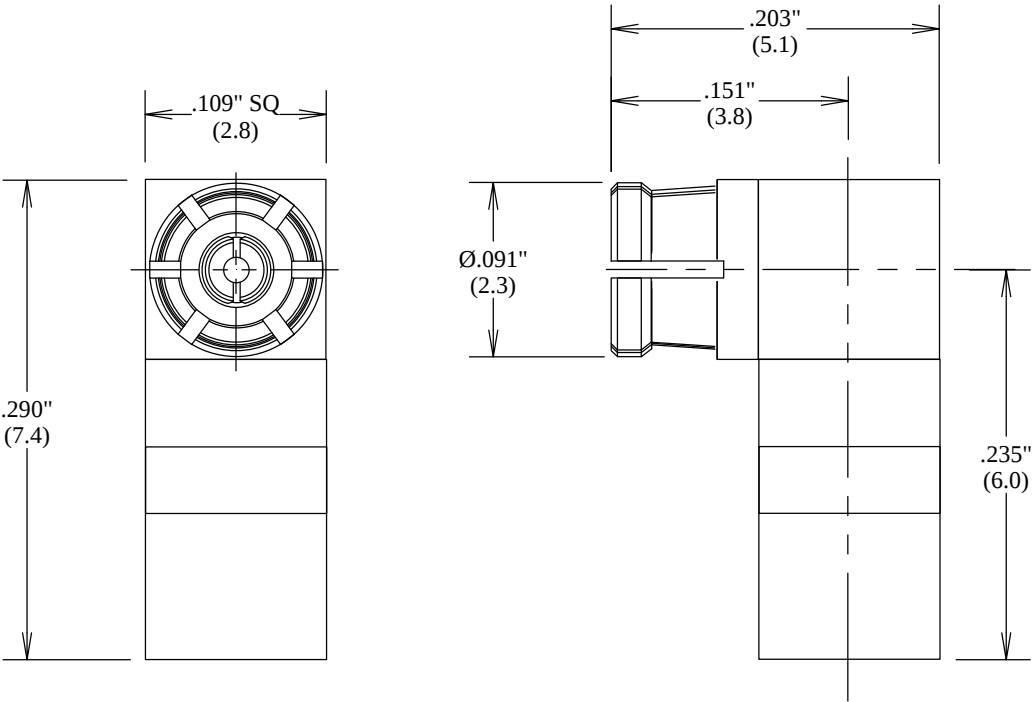

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

MINISMP/F 12 GHZ TERMINATION

ALL DIMENSIONS IN inches(MM) Typical	SIZE	CAGE CODE	DWG NO	REV
	A	3FKR5	ST1251	--
	SCALE		SHEET	