


# BROADBAND COAXIAL ISOLATOR

P/N:TGG100-1V




## TYPICAL PLOT:

### Insertion loss

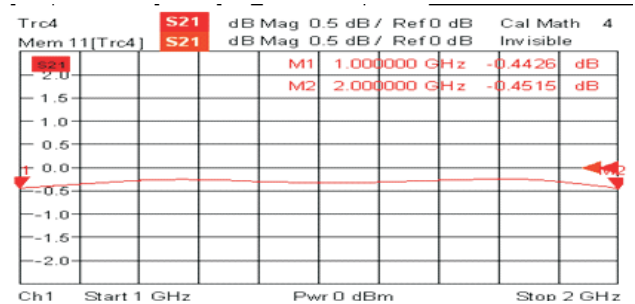

### Isolation

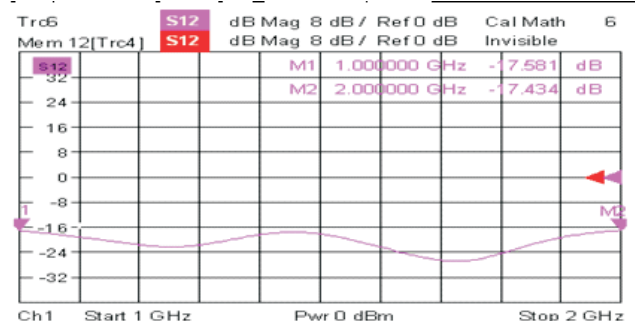

## FEATURES AND APPLICATION:

- ♦ Octave or even wider Bandwidth with coaxial connectors at Input and Output Port
- ♦ Could be used in EW, Radar, Test systems and Wide Band Microwave Assemblys.


## TECHNICAL SPECIFICATIONS:

Frequency Range	Insertion Loss	VSWR	Isolation	Average Power FWD/REV	Transmission Direction	Connector
1-2GHz	0.7dB	1.5	14dB	10W/ 10W	From Left To Right	SMA-F

## ENVIRONMENTAL PARAMETERS:

WORKING TEMPERATURE: 0~+50℃

## OUTLINE:

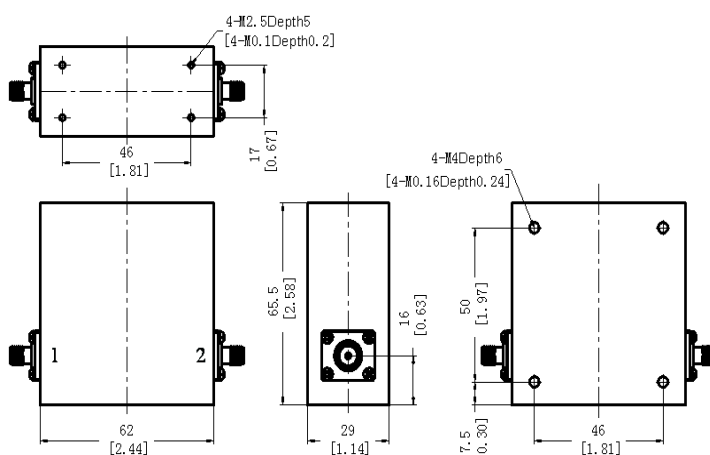

### VSWR

