

Electrical specifications

Center Frequency: 2600 MHz

Bandwidth: 200 MHz min

VSWR: 15 dB min

Input / Output Impedance: 50 Ohms

Passband: 2500-2700 MHz

Passband Insertion Loss: 1.5 dB max

Passband Ripple: 0.1 dB max

Rejection: 40 dB min at 2150 MHz

Rejection 2: 40 dB min at 3050 MHz

Power Handling: 1 W

Mechanical

Mounting Method: SMT

Dimensions: 26.4 x 14 x 4.65 mm


Environmental

Operating Temperature: -35°C to +85°C

Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

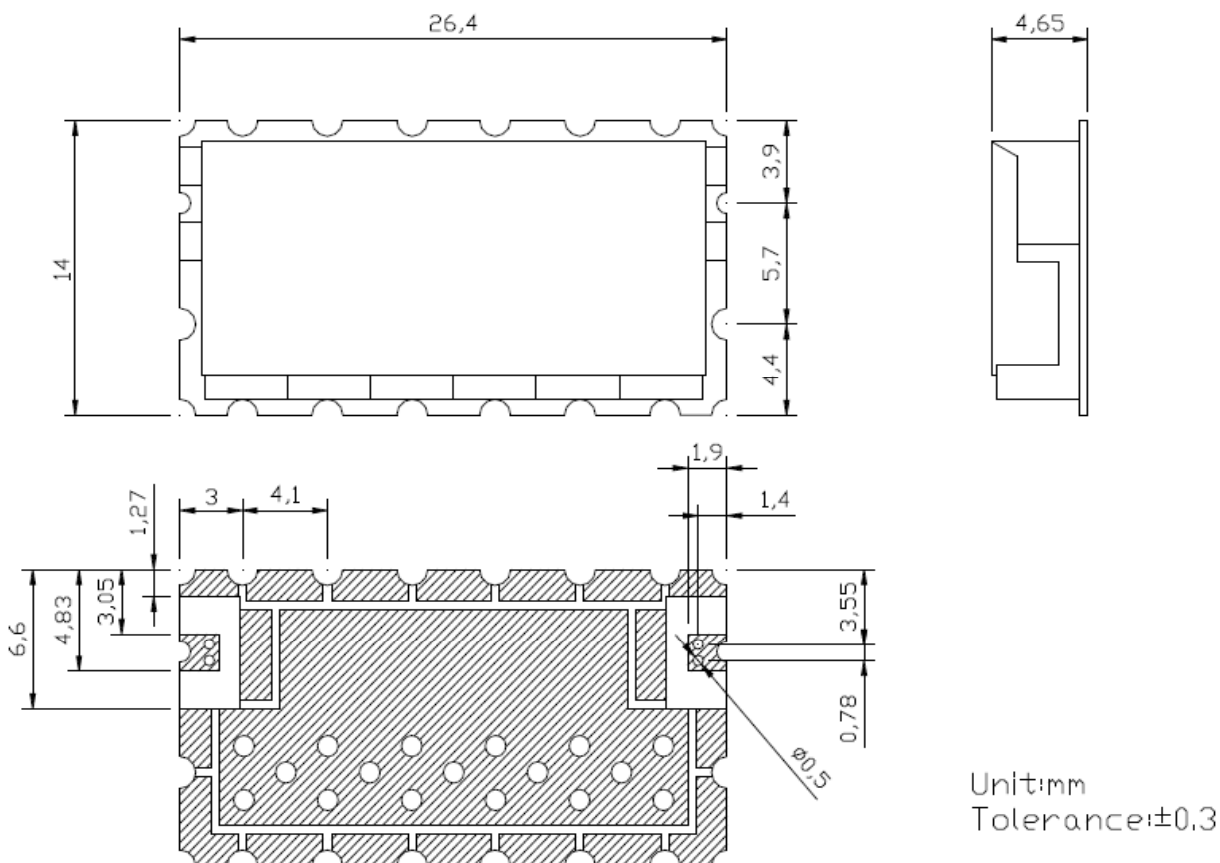



ANATECH ELECTRONICS INC
RF & Microwave Filters & Products

2600 MHz Ceramic Bandpass Filter

Part Number: AM2600B1069



Response Plot:

