

MECHANICAL
CONTACT: BREAK BEFORE MAKE
ACTUATOR: FAILSAFE
SWITCHING SPEED: 20 mSEC MAX


ELECTRICAL
ACTUATOR VOLTAGE: 28.0 ± 3.0 Vdc
ACTUATOR CURRENT: 0.300 A MAX @ 28.0 Vdc
POWER HANDLING: 200 WCW @ 1.0 GHz
IMPEDANCE: 50 OHMS

ENVIRONMENTAL
OPERATING TEMP: -54°C to $+90^{\circ}\text{C}$
SINE VIBRATION: 30 G'S rms
LIFE : 1,000,000 CYCLES
RANDOM VIBRATION: 20 G'S rms

SPECIFICATION:

FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0	4.0-8.0	8.0-12.4	12.4-18.0
VSWR (Max.):	1.20:1	1.25:1	1.30:1	1.40:1	1.50:1
INSERTION LOSS (dB):	0.20	0.25	0.30	0.40	0.50
ISOLATION (dB):	90	80	80	70	60

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

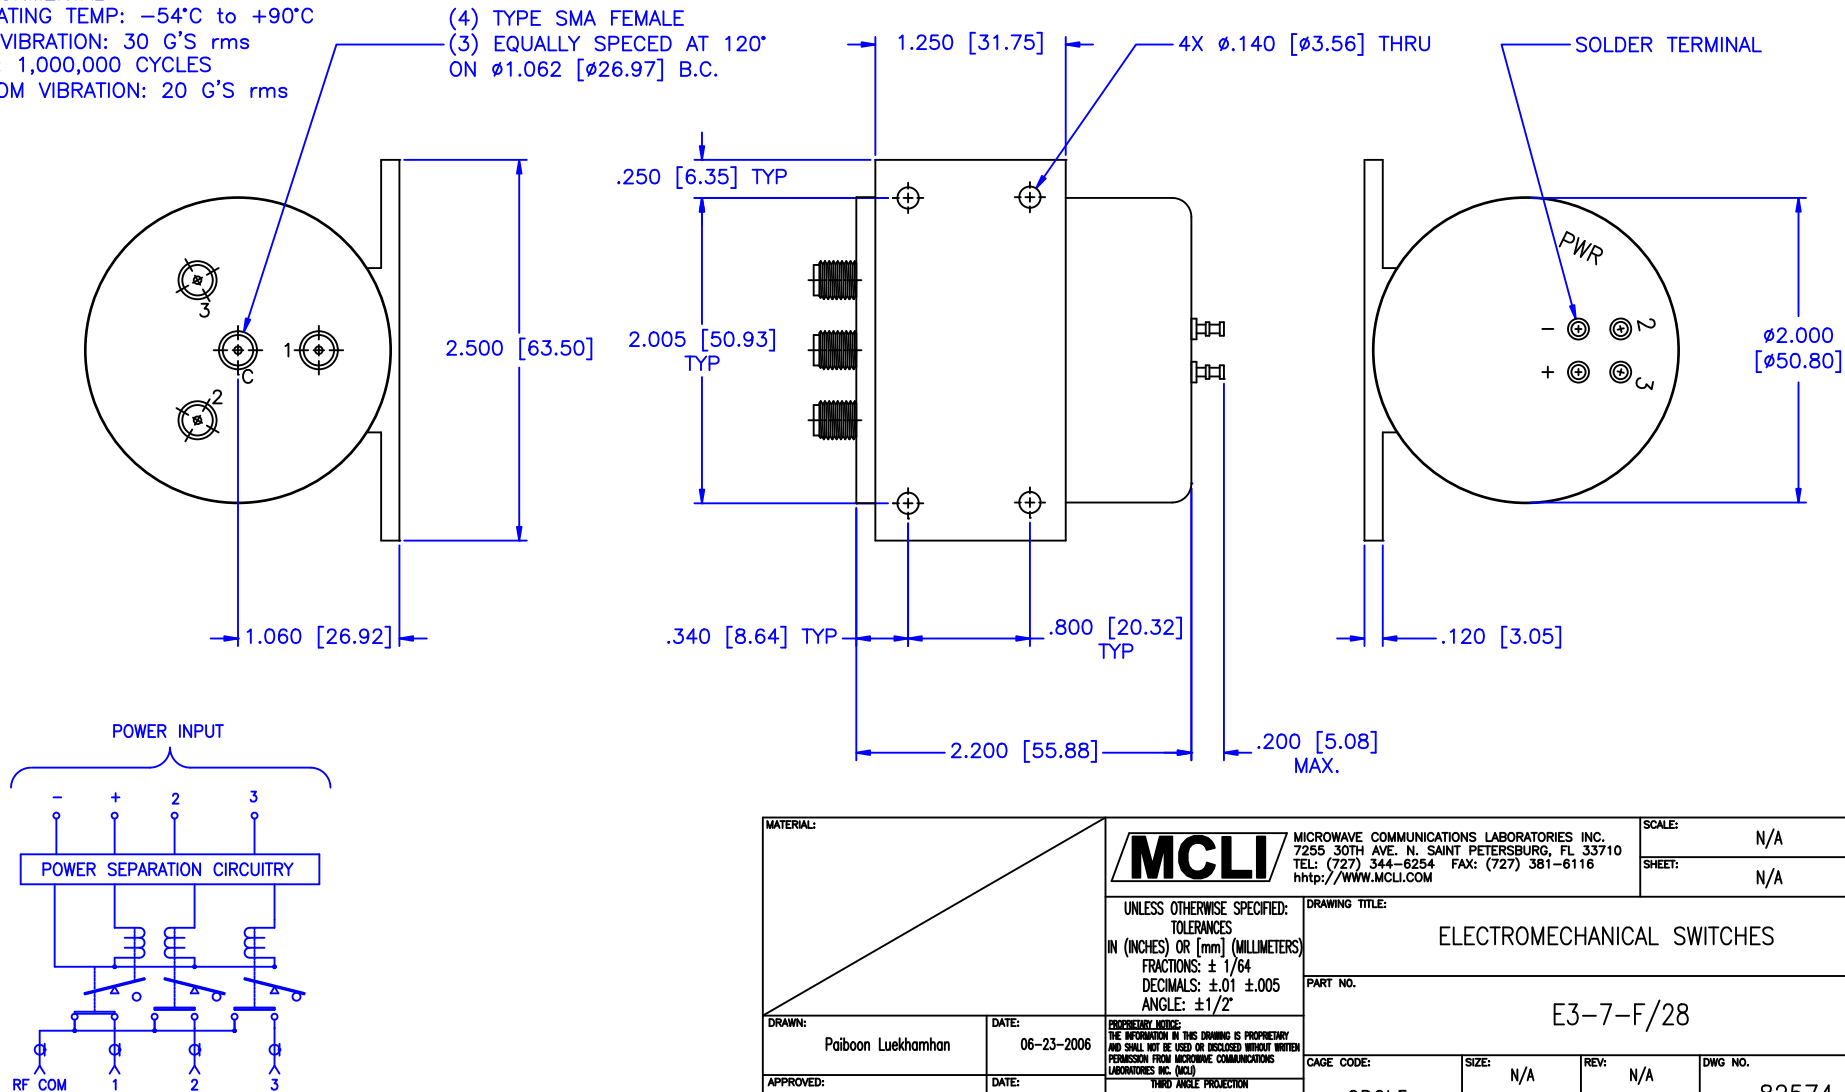

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01$ $\pm .005$ ANGLE: $\pm 1/2^{\circ}$		SHEET: N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-23-2006		DRAWING TITLE: ELECTROMECHANICAL SWITCHES
APPROVED: T. Nguyen		DATE: 06-23-2006		
		PART NO. E3-7-F/28		CAGE CODE: OD2L5
		THIRD ANGLE PROJECTION		
		SIZE: N/A		REV: N/A
		DO NOT SCALE THE DRAWING		DWG NO. 82574