


Surface Mount Directional Coupler

75Ω

5 to 2000 MHz

TCD-9-1W-75X+



CASE STYLE: DB1627

PRICE: \$1.49 ea. QTY(20)

Maximum Ratings

Operating Temperature -40°C to 85°C


Storage Temperature -55°C to 100°C

* Case temperature is defined as temperature on ground leads.
Permanent damage may occur if any of these limits are exceeded.


Pin Connections

INPUT	3
OUTPUT	4
COUPLED	1
GROUND	2
75Ω TERM EXTERNAL	6
NOT USED	5

Outline Drawing

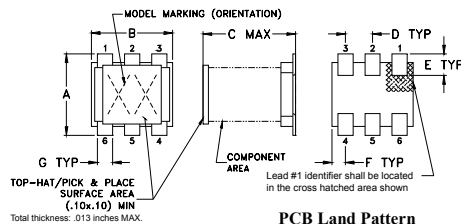


PCB Land Pattern



Outline Dimensions (inch)

A	B	C	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	H	J	K		wt
.028	.065	.190	.030		grams
0.71	1.65	4.83	0.76		0.15

Demo Board MCL P/N: TB-72 Suggested PCB Layout (PL-010)

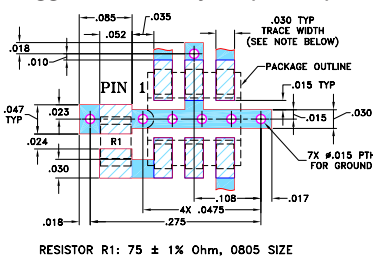

NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS 0.030" ± 0.002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.

2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)

■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- wideband, 5 to 2000 MHz
- low mainline loss, 1.3 dB typ. (5-1000 MHz)
- aqueous washable
- leads for excellent solderability
- protected by US Patent 6,140,887

Applications

- GPS
- cellular
- satellite distribution
- CATV

Electrical Specifications




FREQ. RANGE (MHz)	COUPLING (dB)		MAINLINE LOSS¹ (dB)						DIRECTIVITY (dB)						VSWR (:1)	POWER INPUT, W	
			L		M		U		L		M		U				
	f _L -f _U	Norm.	Flatness	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.
5-1000	8.9±0.5	±0.6	1.3	2.1	1.3	2.0	1.8	2.4	21	17	15	—	10	—	1.30	0.5	1.0
1000-2000	8.5±0.5	±0.6	—	—	2.5	—	—	—	—	—	10	—	—	—	1.60	—	1.0

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	1.29	8.99	21.24	16.92	25.24	16.42
200.00	1.28	8.94	17.61	17.17	24.67	16.49
600.00	1.46	8.84	11.06	12.00	15.49	12.84
800.00	1.63	8.98	9.49	11.14	14.69	11.57
1000.00	1.87	8.81	8.59	11.05	14.44	10.62
1200.00	2.06	8.50	8.12	11.15	14.53	9.81
1400.00	2.27	8.43	7.88	11.16	14.51	9.22
1600.00	2.50	8.66	7.63	11.20	15.36	8.91
1800.00	2.71	9.00	7.19	11.56	15.46	8.40
2000.00	2.73	8.92	6.49	11.81	14.35	8.53

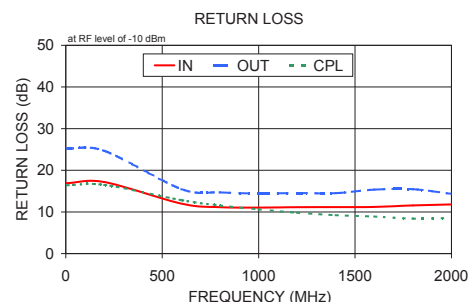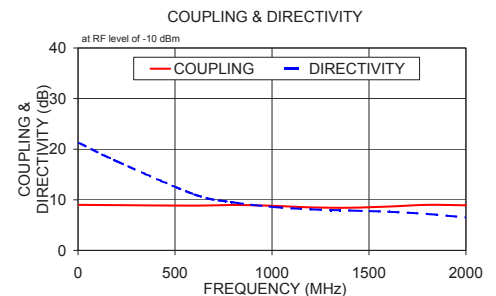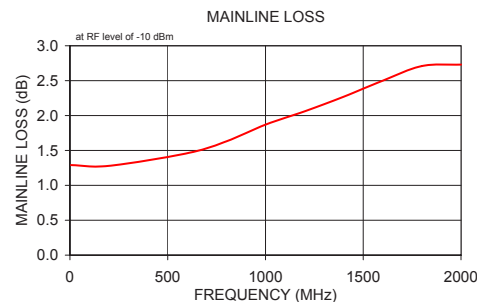

Electrical Schematic

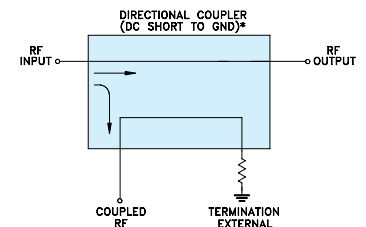

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) AND EXTERNAL TERMINATION.



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M135914
ED-8571/1
TCD-9-1W-75X+
WZ/TD/CP/AM
131017
Page 1 of 1