


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

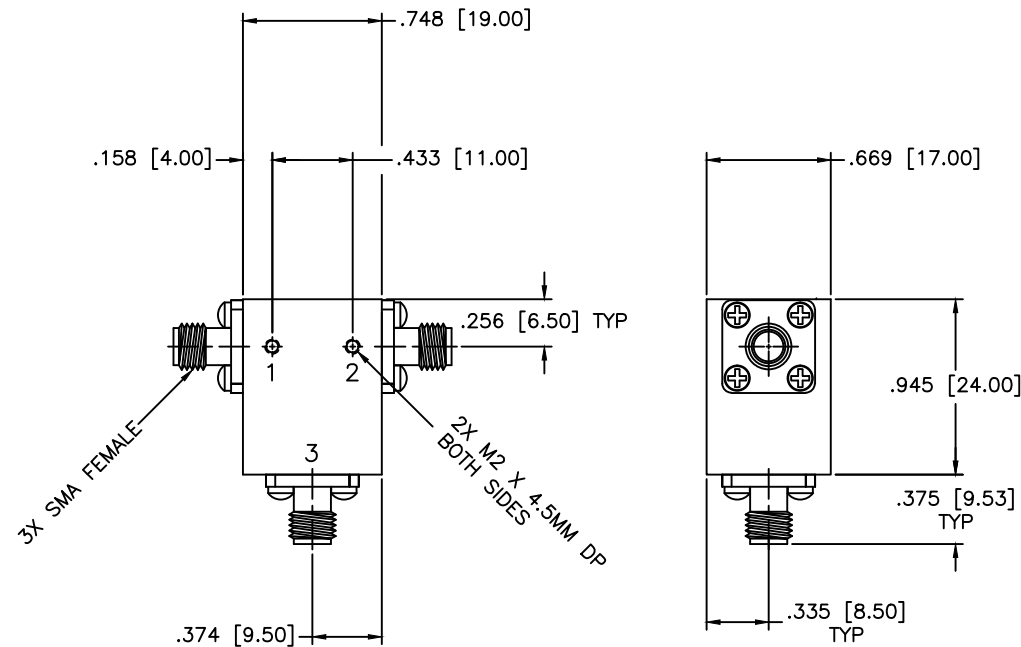

SPECIFICATIONS

Frequency Range: 5.2–10.4 GHz
Isolation: 17dB Min.
Insertion loss: 0.6dB Max.
VSWR: 1.35:1 Max.
Power: 50W Avg, 100W Peak
Operating Temperature: –30°C to +70°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
				SHEET:	N/A
DRAWING TITLE:		COAXIAL CIRCULATOR			
PART NO.		CS-23			
CAGE CODE:		SIZE:	REV:	DWG NO.	
0D2L5		N/A	N/A	84828	
DO NOT SCALE THE DRAWING					

UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.05$ ANGLE: $\pm 1/2^\circ$	PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)
THIRD ANGLE PROJECTION 	

DRAWN:	DATE:
Paiboon Luekhamhan	05-18-2010
APPROVED:	DATE:
T. Nguyen	05-18-2010