

DNF1300-T0410

4.4 GHz to 5.001 GHz


DNF Drop-in ISOLATORS & CIRCULATORS



Specifications



RF Frequency	4.4 GHz to 5.001 GHz
Isolation	20 dB (min)
Insertion Loss	0.4 dB (max)
VSWR	1.25:1
Peak Power	100 Watts (max)
Average Power	10 Watts (max)
Package Size	0.50 x 0.50 x 0.21"

Environmental Notes

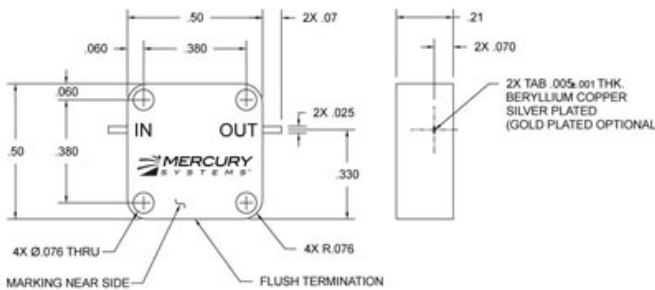

MERCURY COMMERCIAL ELECTRONICS

Microwave RF Components | Manteca, CAL | 1-209-825-3977 | rf.mrcy.com
Specifications subject to change without notice

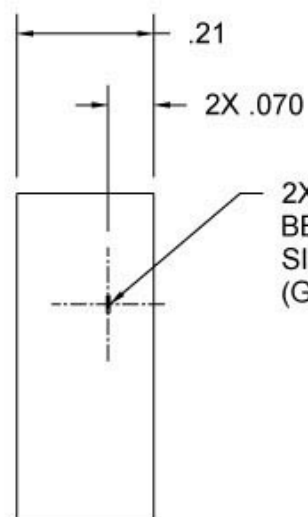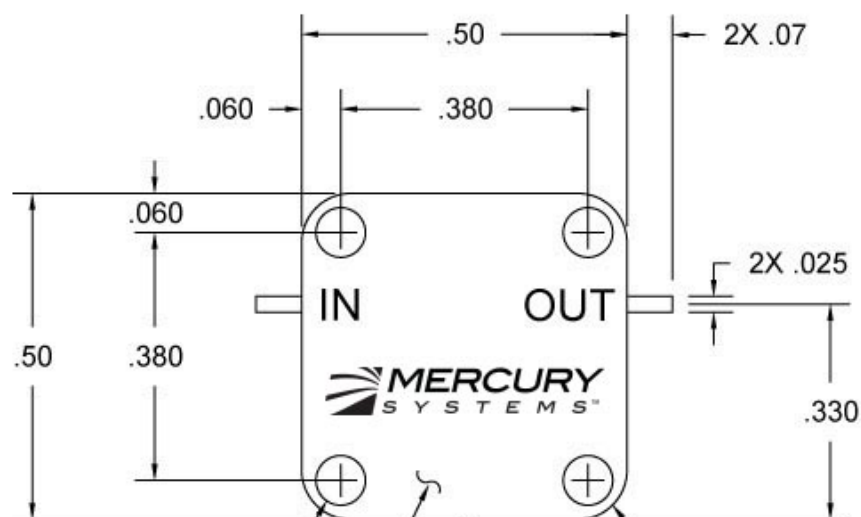

2X TAB .005 ± .001 THK.
BERYLLIUM COPPER
SILVER PLATED
(GOLD PLATED OPTIONAL)

4X Ø.076 THRU

4X R.076

MARKING NEAR SIDE

FLUSH TERMINATION