


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

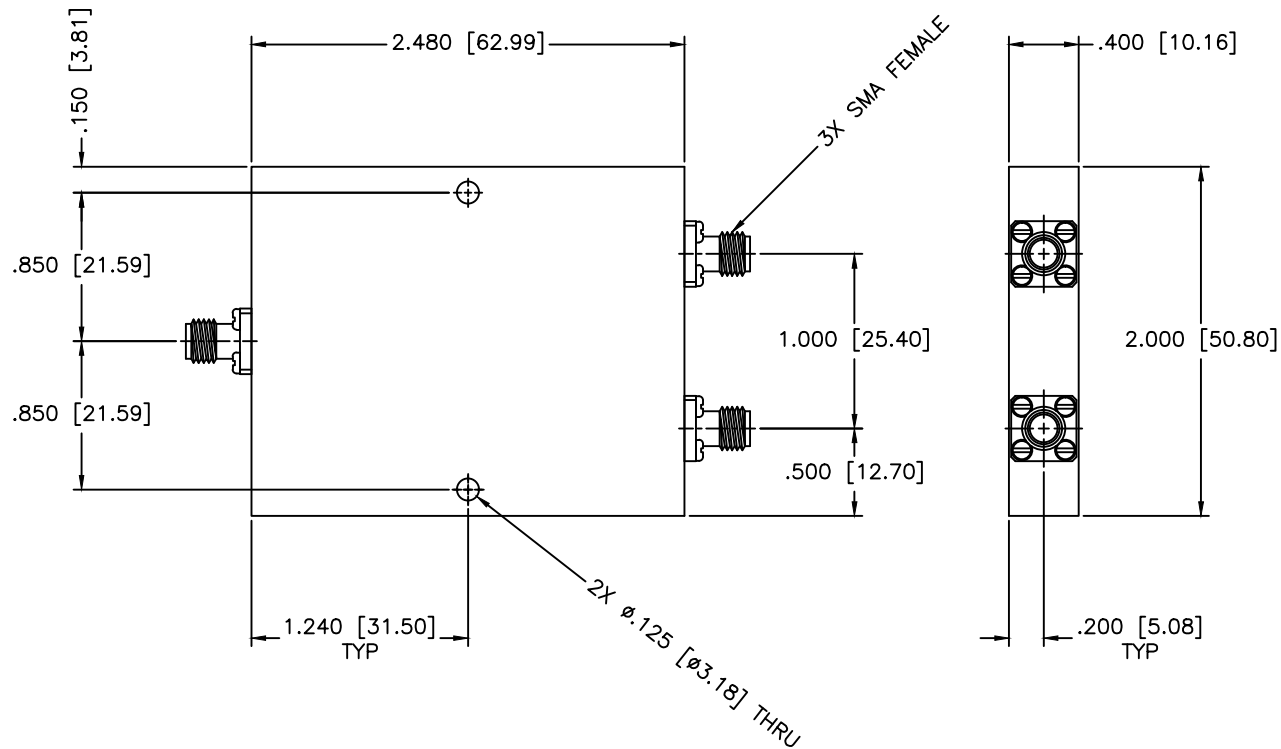

SPECIFICATIONS

Frequency Range: 0.3–1.0 GHz
 Insertion Loss Max: 0.8dB
 Isolation: 15dB Min.
 VSWR Input/Output: 1.50:1/1.50:1 Max.
 Amplitude Balance: ± 0.4 dB Max.
 Phase Balance: ± 8 Deg. Max.
 Power: 10W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE: N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER
DRAWN: Paiboon Luekhamhan DATE: 04-06-2001		PART NO.: PS2-183		
APPROVED: T. Nguyen DATE: 04-06-2001		CAGE CODE: OD2L5 SIZE: A REV: N/A DO NOT SCALE THE DRAWING	DWG NO.: 83947	