

SMA 单刀八掷开关 (常开型)**DC-18GHZ / SMA female****RF 性能指标**

Frequency Range	DC-3GHZ	3-6GHZ	6-12GHZ	12-18GHZ
VSWR	<1.20	<1.30	<1.50	<1.60
Insertion Loss	<0.2dB	<0.3dB	<0.4dB	<0.8dB
Isolation	>80dB	>70dB	>60dB	>50dB
Power Handling(CW)	80W	60W	30W	20W



- . RF Impedance: 50 ohm
- . Operating Voltage: DC12V/270mA (Option:DC24V/140mA,)
- . Switching Time: <15ms
- . Life:>1 000000cycles
- . Switching Sequence:Break Before Make
- . Operating Temperature: -35 ~ +65℃
- . RF Interface: SMA female

产品编号：

Series	RF Channels	Operating Voltage	Frequency Range	TTL Fuction
P/N: 1S ☐	☐ ☐	☐ ☐	☐ ☐	☐
☐ 7T	☐ 1 ☐ 2 DC12V	☐ 0 ☐ 3 DC-3GHZ	☐ NO TTL	
☐ 8T	☐ 2 ☐ 4 DC24V	☐ 0 ☐ 6 DC-6GHZ	☐ T With TTL	
	☐ 2 ☐ 8 DC28V	☐ 1 ☐ 2 DC-12GHZ		
		☐ 1 ☐ 8 DC-18GHZ		

例： **1S81212** （SP8T/DC12V/DC-12GHZ/SMA female）


外形尺寸图 (mm)：

Tel :0086-10-82087227

Fax:0086-10-82087380


E-mail: rfswitch@126.com

Web site: www.rf-switch.com

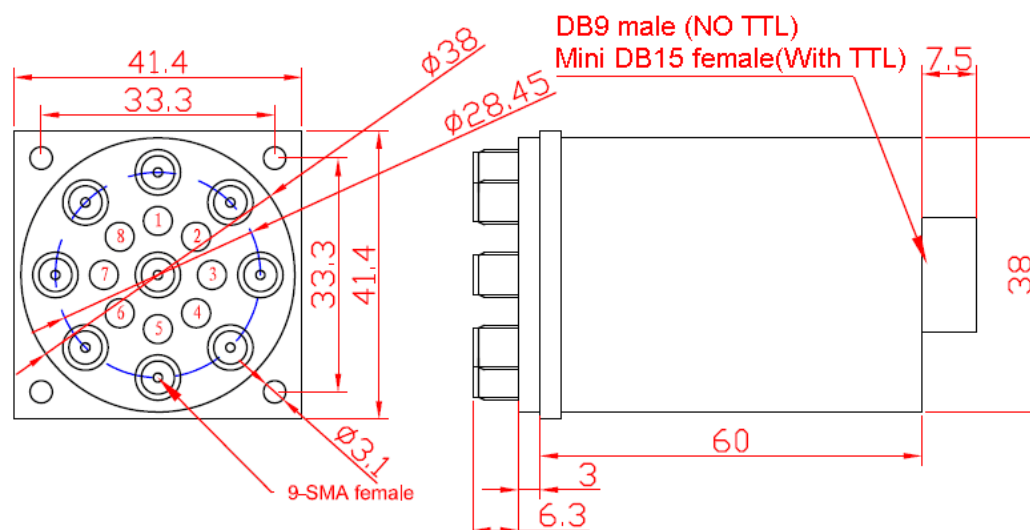

原理图

电压控制型（控制线接头：DB9 公头）

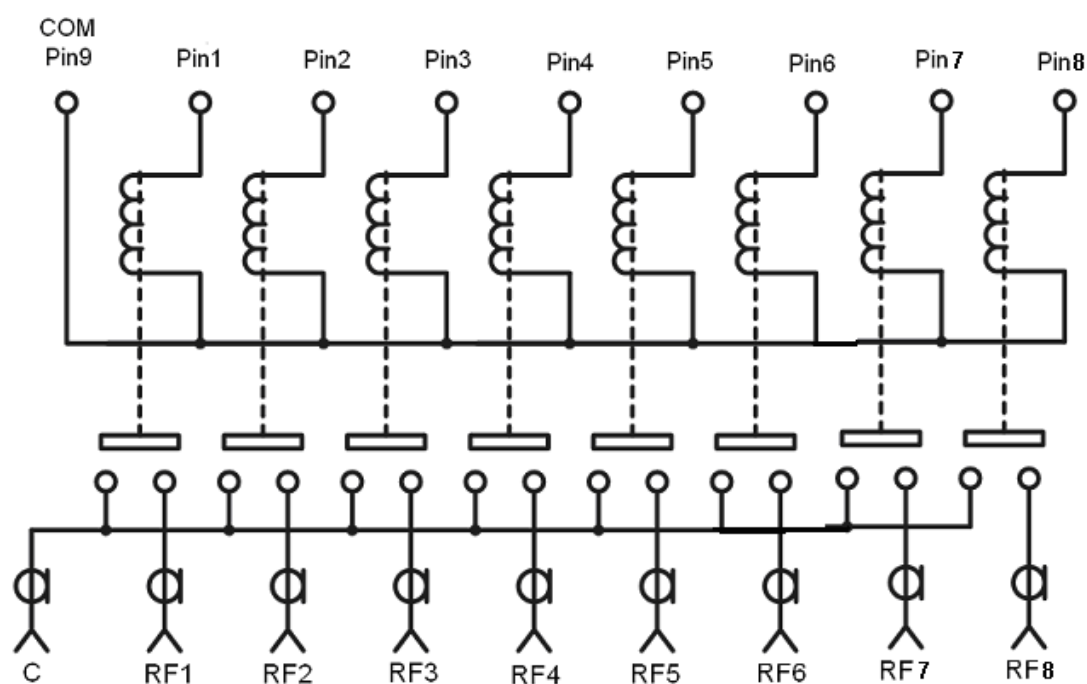

带 TTL 逻辑控制（控制线接口为 mini DB15 母头）

