

ELECTRICAL
ACTUATOR VOLTAGE: 28.0 Vdc (22.0–32.0 Vdc)
ACTUATOR CURRENT: 0.500 A MAX @ 28.0 Vdc
POWER HANDLING: 200 WCW @ 1.0 GHz
IMPEDANCE: 50 OHMS

ENVIRONMENTAL
OPERATING TEMP: -54°C to +90°C
SINE VIBRATION: 30 G'S rms
LIFE : 1,000,000 CYCLES
RANDOM VIBRATION: 20 G'S rms



(6) TYPE SMA FEMALE
- (5) EQUALLY SPACED AT 60°
ON $\phi 1.062$ [$\phi 26.97$] B.C.

FREQUENCY RANGE (GHz): DC-2.0 2.0-4.0 4.0-8.0 8.0-12.4 12.4-18.0

VSWR (Max.): 1.20:1 1.25:1 1.30:1 1.40:1 1.50:1

INSERTION LOSS (dB): 0.20 0.25 0.30 0.40 0.50

ISOLATION (dB): 90 80 80 70 60

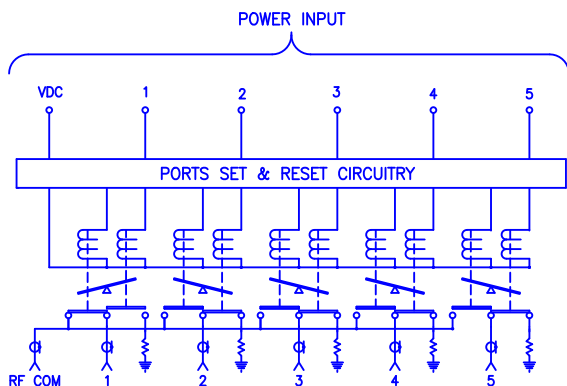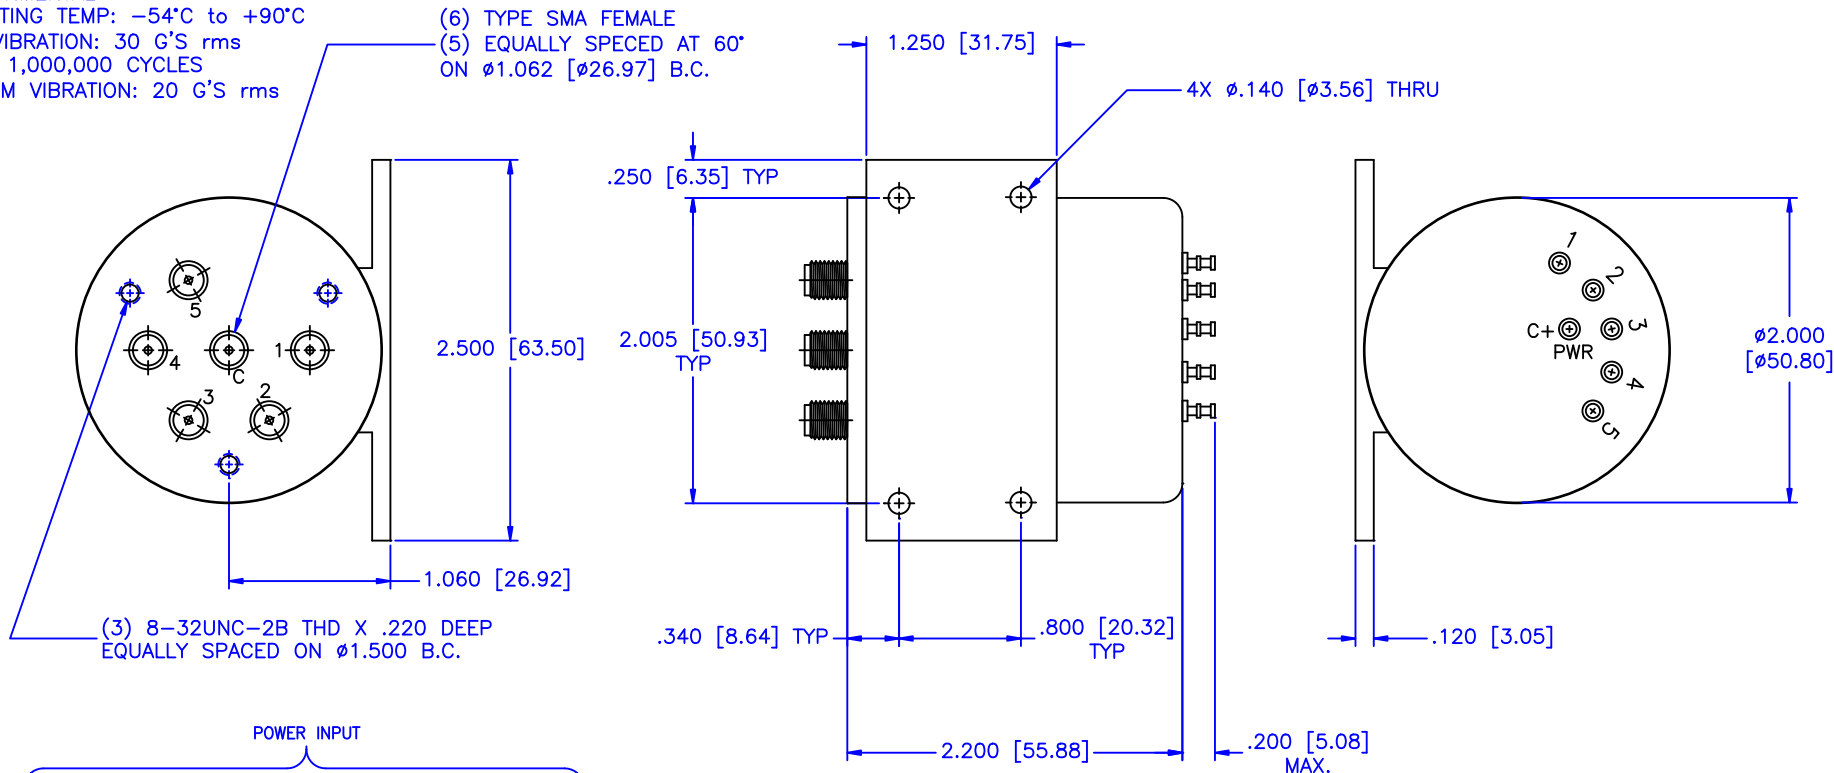

MATERIAL:



MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: ± 0.01 ± 0.005
ANGLE: $\pm 1/2^\circ$

DRAWING TITLE:

ELECTROMECHANICAL SWITCHES

PART NO.

W5-7-L/28P

DRAWN: Paiboon Luekhamhan

DATE: 03-02-2009

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCL)

APPROVED: T. Nguyen

DATE: 03-02-2009

LABORATORIES INC. (MCI)
THIRD ANGLE PROJECTION

CAGE CODE:	0D2L5
------------	-------

SIZE:	
-------	--

REV:

DWG NO.	
---------	--

DO NOT SCALE THE DRAWING

84233