

D

C

B

A

D

C

B

A


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

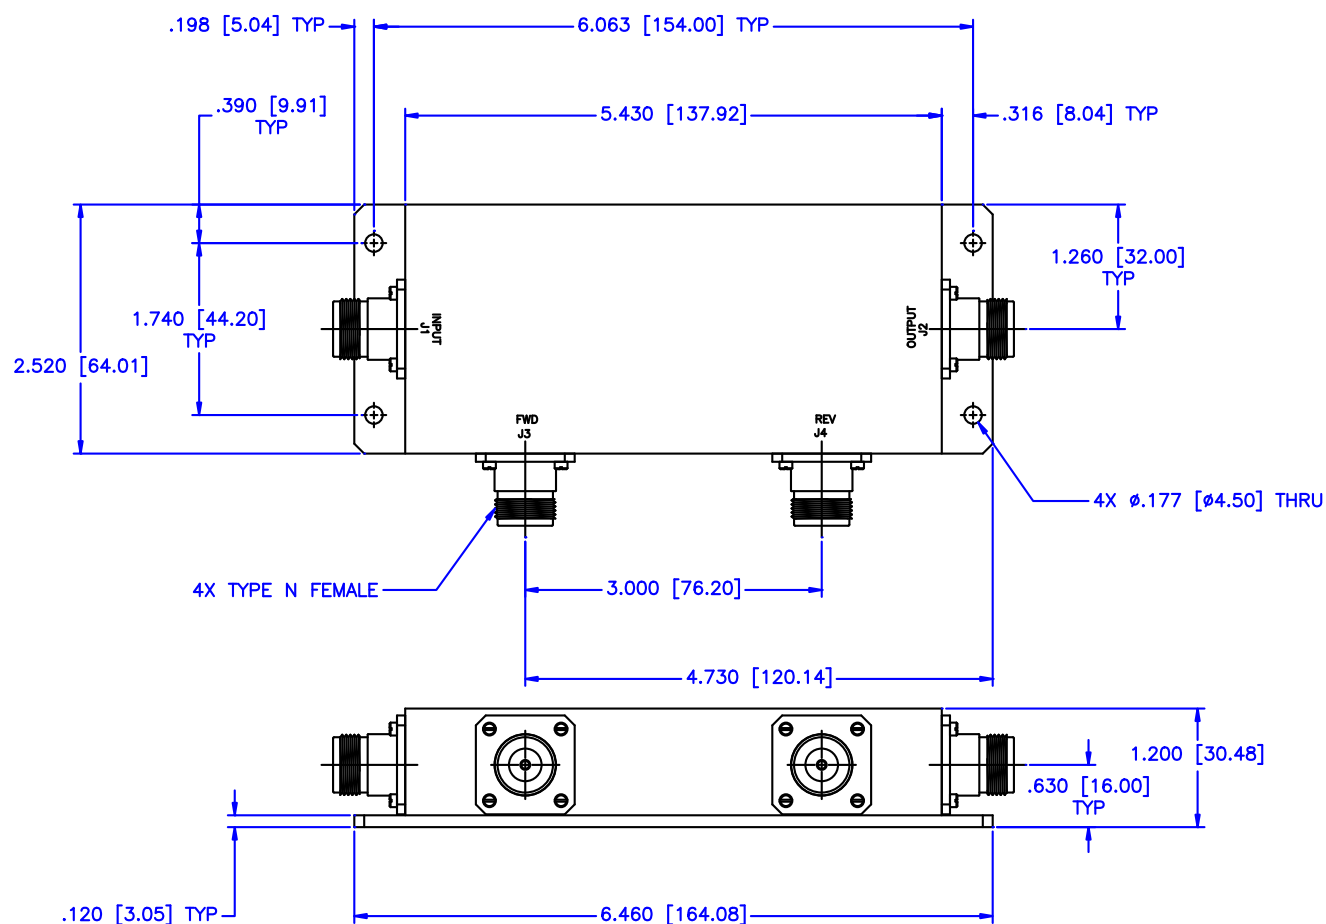

SPECIFICATIONS

FREQUENCY RANGE: 0.5–32 MHz
FREQUENCY SENSITIVITY: ± 0.30 dB
INSERTION LOSS: 0.30 dB Max.
DIRECTIVITY: 25 dB Min.
VSWR PRIME LINE: 1.05:1 Max.
POWER: 3000 Watts

MATERIAL:	
DRAWN:	Paiboon Luekhamhan
DATE:	03-27-1999
APPROVED:	T. Nguyen
DATE:	03-27-1999




MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.005$
ANGLE: $\pm 1/2^\circ$

PROPRIETARY NOTICE
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



DRAWING TITLE:			
HIGH POWER DUAL DIRECTIONAL COUPLER			
PART NO.			
HDL-15-30			
CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	C	N/A	81252
DO NOT SCALE THE DRAWING			