



ISSUE 1; August 2014 - RoHS 2011/65/EU

Description

- Standard 5 x 3.2mm Voltage Controlled Crystal Oscillator
- Ceramic package with a seam sealed metal lid, hermetically sealed
- For higher frequencies up to 125MHz please contact our sales offices

Frequency Parameters

- Frequency 1.25MHz to 80.0MHz
- Frequency Stability $\pm 25.00\text{ppm}$ to $\pm 100.00\text{ppm}$

Electrical Parameters

- Supply Voltage $2.8\text{V} \pm 5\%$

Frequency Adjustment

- Pulling $\pm 100\text{ppm min}$
- Control Voltage $1.4\text{V} \pm 1.4\text{V}$
- Input Impedance $100\text{k}\Omega$ typ
- Linearity: $\pm 10\%$ max, positive sense
- Modulation Bandwidth: 20kHz min

Operating Temperature Ranges

- -10 to 70°C
- -40 to 85°C

Output Details

- Output Compatibility HCMOS
- Drive Capability 15pF max
- Logic '1' ($>70\%V_s$) to pad 2 enables oscillator output
- Logic '0' ($<30\%V_s$) to pad 2 disables oscillator output; when disabled the oscillator output goes to the high impedance state
- No connection to pad 2 enables oscillator output

Environmental Parameters

- Storage Temperature Range: -40 to 85°C


Ordering Information

- Frequency*
- Model*
- Output
- Frequency Stability (over operating temperature range)*
- Operating Temperature Range*
- Supply Voltage
- Pullability*
- Example
- 10.0MHz IQXV-22
- HCMOS $\pm 50\text{ppm}$ -10 to 70°C $2.8\text{V} \pm 100\text{ppm min}$

Compliance


- RoHS Status Compliant
- REACH Status Compliant
- MSL Rating (JDEC-STD-033): Not Applicable

Outline (mm)

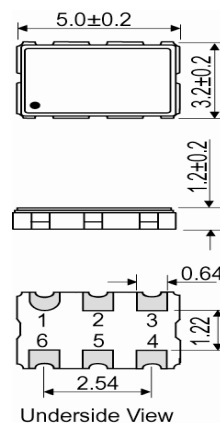


- Pad Connections**
1. Voltage Control
 2. Tri-State Operation
 3. GND
 4. Output
 5. N/C
 6. $+V_s$

Solder Pad Layout




Test Circuit

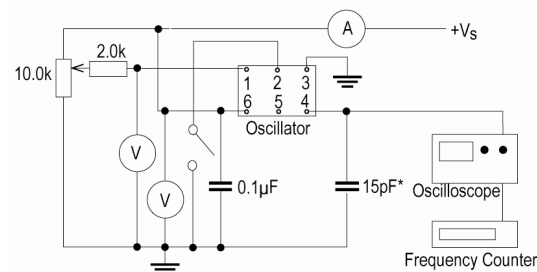

*Inclusive of jigging and equipment capacitance

Wave Form

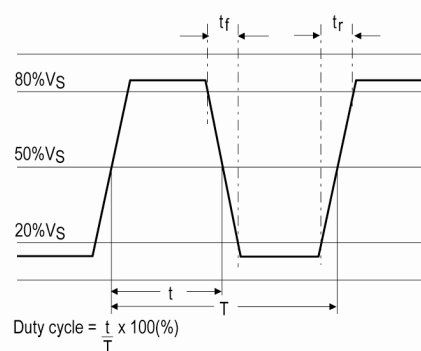

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Packaging Details

- Pack Style: Bulk Loose in bulk pack
Pack Size: 100
- Pack Style: Reel Tape & reel in accordance with EIA-481-D
Pack Size: 1,000

Electrical Specification - maximum limiting values 2.8V $\pm$ 5%

Frequency Min	Frequency Max	Temperature Range	Stability (min)	Current Draw	Rise and Fall Time	Duty Cycle
		°C	ppm	mA	ns	%
1.25MHz	30.0MHz	-10 to 70	$\pm$ 25.0	15	5	40/60
		-40 to 85	$\pm$ 25.0	15	5	40/60
30.000001MHz	52.0MHz	-10 to 70	$\pm$ 25.0	25	5	40/60
		-40 to 85	$\pm$ 25.0	25	5	40/60
52.000001MHz	80.0MHz	-10 to 70	$\pm$ 25.0	35	5	40/60
		-40 to 85	$\pm$ 25.0	35	5	40/60

This document was correct at the time of printing; please contact your local sales office for the latest version.

[Click to view latest version on our website.](#)

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0) 30 408 192 300

France: +33 (0)5 34 50 91 18
USA: +1 408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com