

Surface Mount

Power Splitter/Combiner

4 Way-0° 50Ω 1525 to 2375 MHz

WP4P1+



CASE STYLE: DQ1225
PRICE: \$1.49 ea. QTY. (20)

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications



Available Tape and Reel
at no extra cost

Reel Size Devices/Reel
7" 20, 50, 100, 200, 500, 1000, 2000


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-65°C to 150°C
Power Input (as a splitter)	1.5W max.
Internal Dissipation	0.375W max.
Permanent damage may occur if any of these limits are exceeded.	


Pad Connections

SUM PORT	2
PORT 1	12
PORT 2	10
PORT 3	6
PORT 4	4
GROUND	1,3,5,7,8,9,11, paddle

Product Marking




Outline Drawing

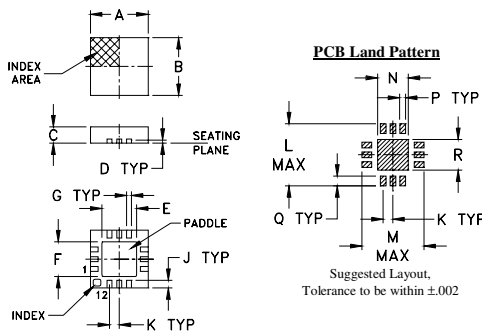

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R	wt	
.020	.127	.127	.049	.010	.020	.049	grams	
0.51	3.23	3.23	1.24	0.25	0.51	1.24	0.02	

Demo Board MCL P/N: TB-395+ Suggested PCB Layout (PL-259)

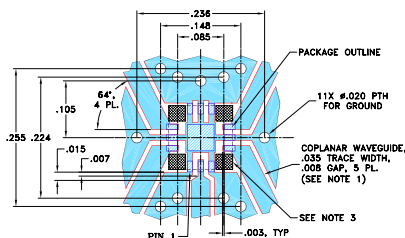

NOTES:

- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

Features

- excellent isolation, 26 dB typ.
- excellent phase unbalance, 1 deg. typ.
- excellent amplitude unbalance, 0.15 dB typ.
- small size, .118" x .118" x .035"
- high ESD level
- aqueous washable

Applications

- PCS/DCS
- WCDMA
- GPS

Electrical Specifications




FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS* (dB) ABOVE 6.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1) Typ.	
f_L - f_U	Typ.	Min.	Typ.	Max.	Max.	Max.	Port S	Ports 1,2,3,4
1525-2375	26	15	0.9	2.0	4.0	0.5	1.5	1.4

*Includes fixture loss, 0.17 dB typ.

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1525.00	7.31	7.46	7.40	7.27	0.19	26.30	22.05	25.33	1.42	1.91	1.59	1.53	1.54	1.55
1550.00	7.20	7.35	7.29	7.17	0.18	27.70	22.89	26.57	1.30	1.80	1.58	1.52	1.52	1.53
1600.00	7.02	7.16	7.10	6.99	0.17	31.20	24.73	29.51	1.08	1.61	1.55	1.48	1.49	1.50
1650.00	6.89	7.01	6.95	6.85	0.16	35.65	26.69	32.87	0.86	1.45	1.52	1.45	1.46	1.47
1700.00	6.79	6.90	6.85	6.75	0.15	37.18	28.46	34.62	0.65	1.33	1.49	1.42	1.44	1.45
1750.00	6.72	6.82	6.76	6.68	0.14	33.34	29.30	32.61	0.45	1.23	1.47	1.40	1.41	1.43
1800.00	6.68	6.76	6.71	6.63	0.13	29.87	28.76	29.73	0.25	1.17	1.45	1.37	1.39	1.41
1850.00	6.65	6.72	6.67	6.61	0.12	27.37	27.37	27.37	0.22	1.17	1.44	1.35	1.37	1.40
1900.00	6.65	6.70	6.65	6.59	0.11	25.51	25.82	25.54	0.40	1.21	1.43	1.34	1.35	1.38
1950.00	6.66	6.69	6.65	6.60	0.09	24.07	24.40	24.10	0.57	1.26	1.42	1.32	1.33	1.38
2000.00	6.67	6.69	6.65	6.61	0.08	22.91	23.17	22.93	0.71	1.33	1.41	1.31	1.32	1.37
2100.00	6.73	6.73	6.68	6.67	0.07	21.18	21.21	21.19	1.04	1.48	1.41	1.29	1.30	1.36
2200.00	6.81	6.78	6.74	6.74	0.07	19.96	19.77	19.95	1.31	1.63	1.41	1.28	1.30	1.37
2300.00	6.90	6.85	6.81	6.84	0.09	19.07	18.66	19.05	1.57	1.78	1.42	1.28	1.29	1.37
2375.00	6.97	6.92	6.87	6.91	0.10	18.55	18.00	18.53	1.80	1.89	1.42	1.28	1.29	1.38

1. Total Loss = Insertion Loss + 6dB splitter loss.

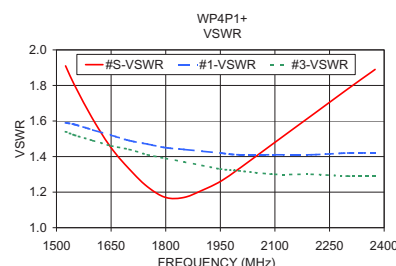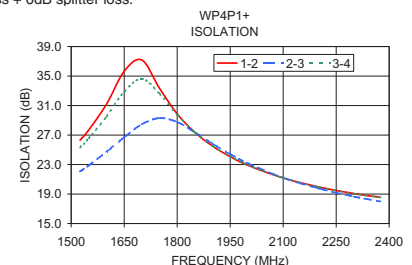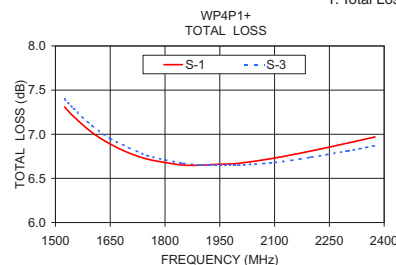

electrical schematic



ESD Rating

Human Body Model (HBM): Class 1A (250 to < 500V) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M2 (100V to < 250V) in accordance with ANSI/ESD STM 5.2 - 1999



www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

Rev. B
M127604
MP4-ED-12616A/3_07
WP4P1+
RS/CP/AM
140609