


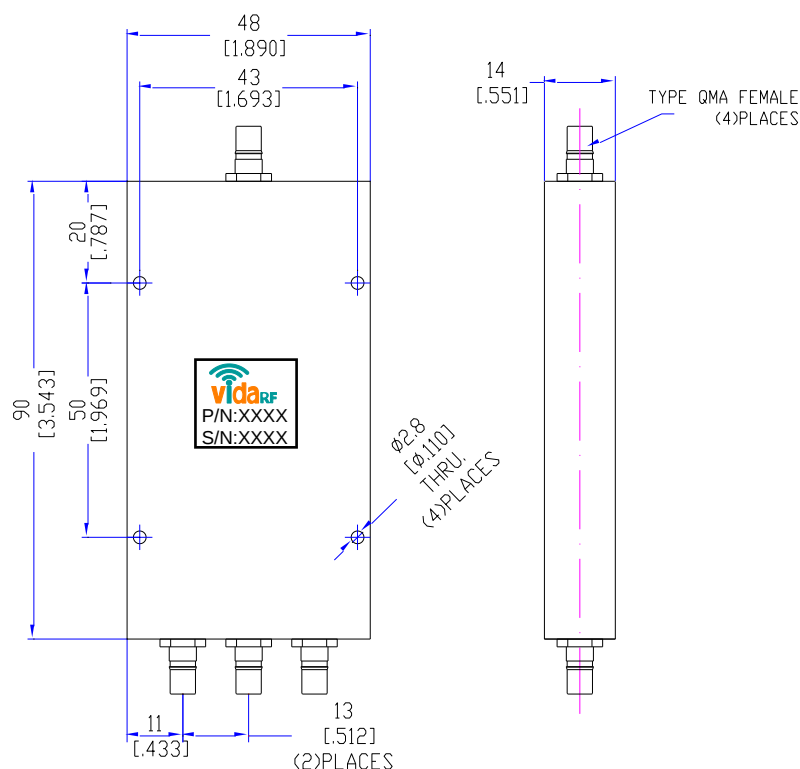

Electrical Specifications

Frequency Range	698~2700MHz
Insertion Loss	≤0.9dB
Isolation	≥18dB
VSWR	≤1.35:1
Amplitude Balance	≤±0.4dB
Phase Balance	≤±5°
Power Handling	Forward ≤30Watt; Reversed ≤1Watt
Impedance	50Ω
Port Connectors	QMA-Female
Surface Color	Silvery White

Environmental Parameters

Operating Temperature -40~+85°C

Operating Humidity Up to 90%,Non- Condensing

				Drawn: T. P 3/31/14	Title: 698-2700MHz 3 way divider					
				Checked: D. H 3/31/14						
Description	Ecn.No	Date	Rev	Approved: S. K 3/31/14						
 Tel:877-777-8432 www.vidaRF.com					Unless otherwise specified dimensions are in millimeters, dimensions in [] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		Cage Code		Part No: VPD-0727Q3	
							6KQ83			
					View:				Size:	Scale:
				A4	4:1	1/1	A			