





This document contains proprietary information and such information may not be disclosed to others for any purposes, nor used for sales/marketing/procurement purposes without written permission

本文件包含专有信息，没有书面许可，该信息不能以任何形式披露给第三方，也不能用于任何目的的买卖、销售及采购。

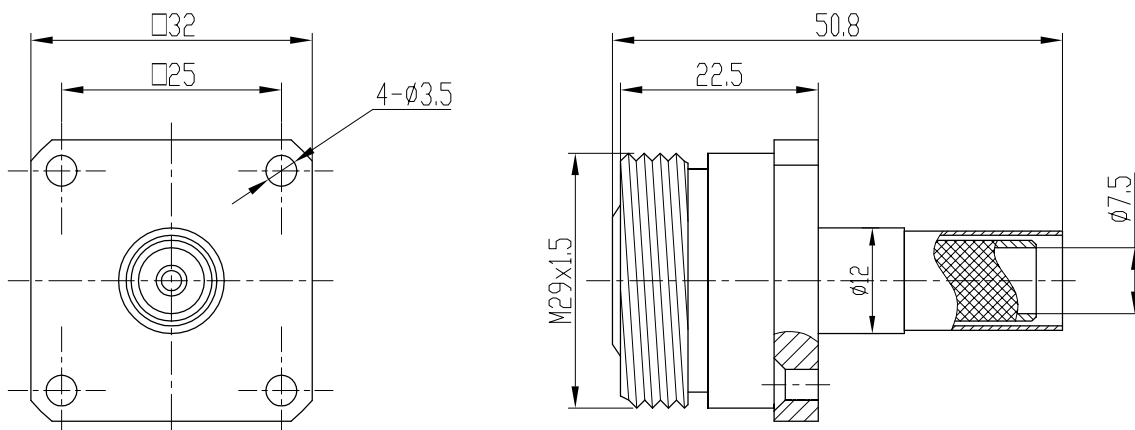

剥线尺寸
stripping dimension

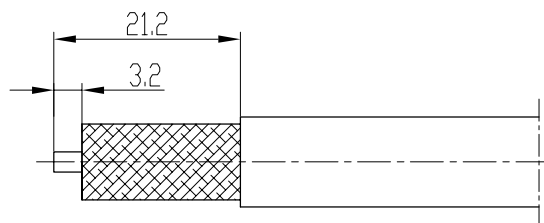

产品型号 type	配接电缆 cable type
L29-KF213	RG-213/U

Electrical Characteristics:

- 1.Characteristic Impedance: 50 Ω
- 2.Frequency range: DC~7.5Ghz
- 3.Contact resistance
Center conductor: $\leq 1.0 \text{ m}\Omega$
Out conductor: $\leq 0.5 \text{ m}\Omega$
- 4.Insulation resistance: $\geq 10000 \text{ M}\Omega$
- 5.Insulator withstanding: 4000V
- 6.VSWR: ≤ 1.5
- 7.Durability: 500cycles

主要性能指标:

- 1.特性阻抗: 50 Ω
- 2.频率范围: DC~7.5Ghz
- 3.接触电阻:
中心导体: $\leq 1.0 \text{ m}\Omega$
外导体: $\leq 0.5 \text{ m}\Omega$
- 4.绝缘电阻: $\geq 10000 \text{ M}\Omega$
- 5.介质耐压: 4000V
- 6.电压驻波比: ≤ 1.5
- 7.插拔次数: 500次

Application: IEC 60169-4

执行标准: IEC 60169-4

Material&Finishing

- 1.Center contact :
Female: phosphor bronze, silver plated
- 2.Flange body: brass, nickel plated
Other metal parts: brass, silver plated
- 3.Insulators: PTFE

材料和镀层

- 1.中心接触件:
插孔: 锡磷青铜, 镀银
- 2.法兰壳体: 黄铜, 镀镍
其它金属零件: 黄铜, 镀银
- 3.绝缘子: 聚四氟乙烯

		SCALE
		1.5:1
	NAME	DATE
DRAWN		
CHECKED		
APPROVED		

L29-KF213
RF COAXIAL CONNECTOR

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE mm, TOLERANCES ARE
FRACTIONS DECIMALS ANGLES
.X $\pm$.15 $\pm 1^\circ$
.XX $\pm$.05
.XXX $\pm$

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.