

MECHANICAL

CONTACT : BREAK BEFORE MAKE
 ACTUATOR : FAILSAFE
 SWITCHING SPEED : 20 mSEC MAX


ELECTRICAL

ACTUATOR VOLTAGE : 28.0 Vdc (22.0-32.0 Vdc)
 ACTUATOR CURRENT : 0.100 A MAX @ 28.0 Vdc
 POWER HANDLING : 200 WCW @ 1.0 GHz

ENVIRONMENTAL

OPERATING TEMP : -54° C TO +90° C
 SINE VIBRATION : 30 G'S rms
 LIFE : 1,000,000 CYCLES
 RANDOM VIBRATION : 20 G'S rms

REVISIONS			
ZONE	REV	DESCRIPTION	APPROVED

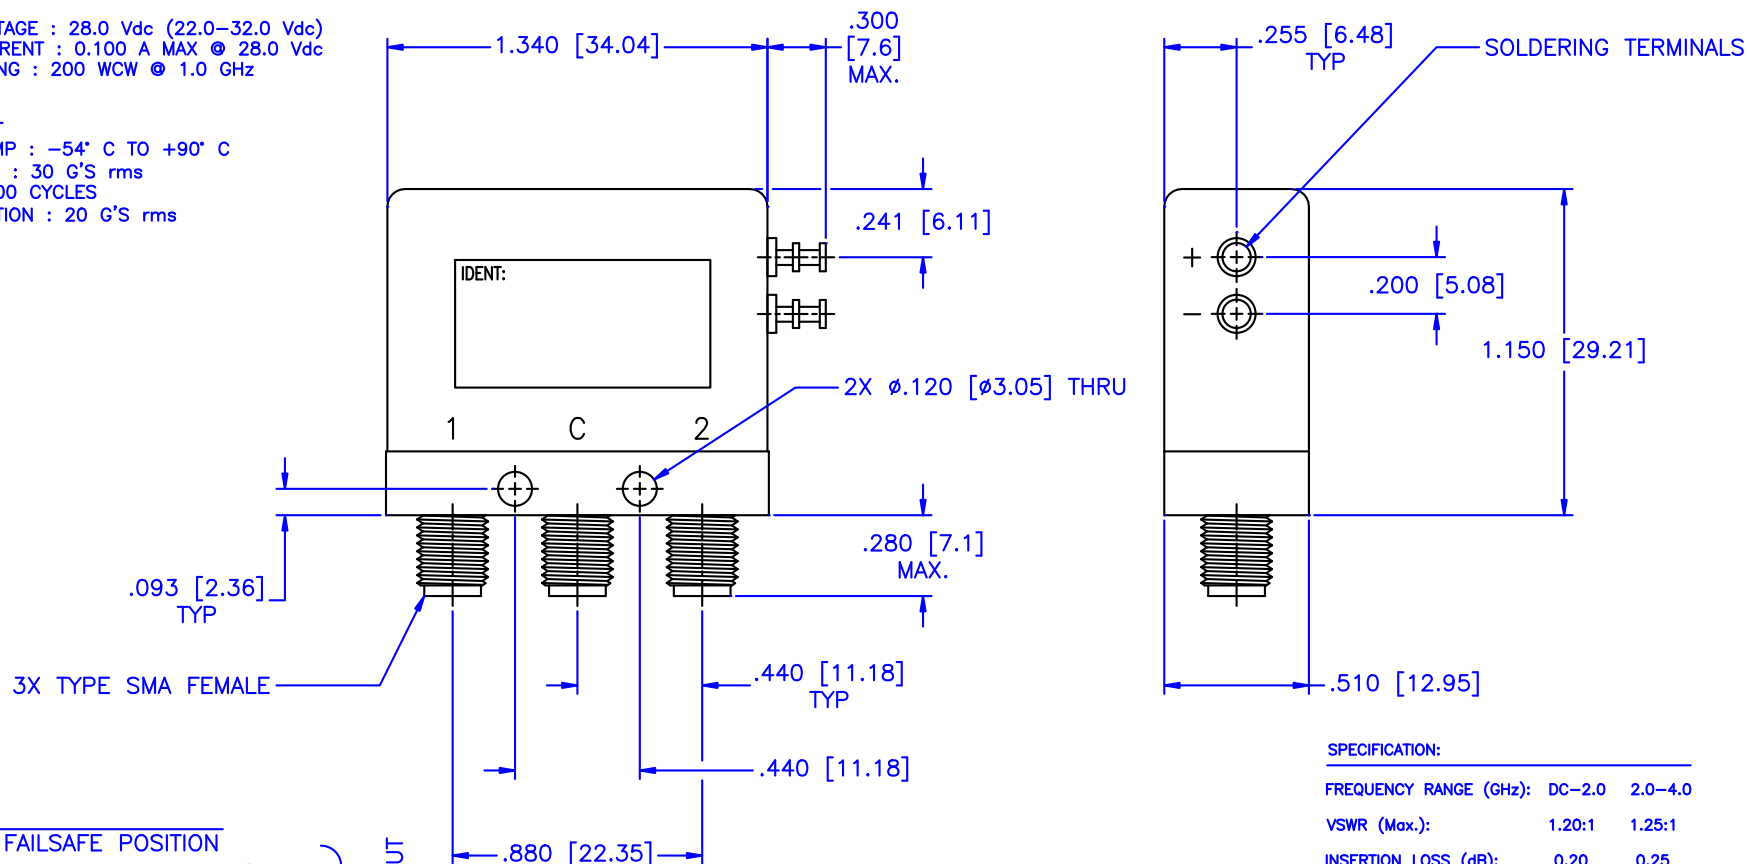


SPECIFICATION:

FREQUENCY RANGE (GHz):	DC-2.0	2.0-4.0
VSWR (Max.):	1.20:1	1.25:1
INSERTION LOSS (dB):	0.20	0.25
ISOLATION (dB):	90	80
IMPEDANCE (Ohms):	50	

SCHEMATIC

SHOWN IN FAILSAFE POSITION

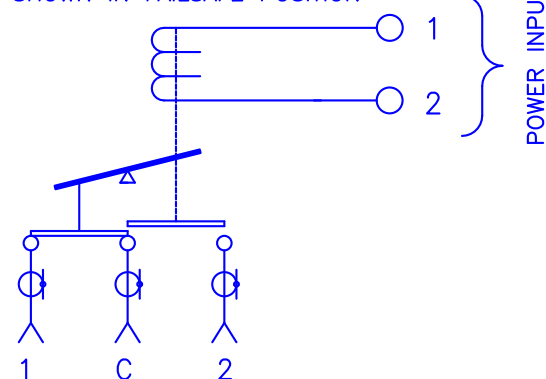

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: ELECTROMECHANICAL SWITCHES		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 04-02-2001		PART NO. K1-3-F	
APPROVED: T. Nguyen		DATE: 04-02-2001		CAGE CODE: OD2L5	SIZE: A
THIRD ANGLE PROJECTION		REV: N/A		DWG NO. 82163	
				DO NOT SCALE THE DRAWING	