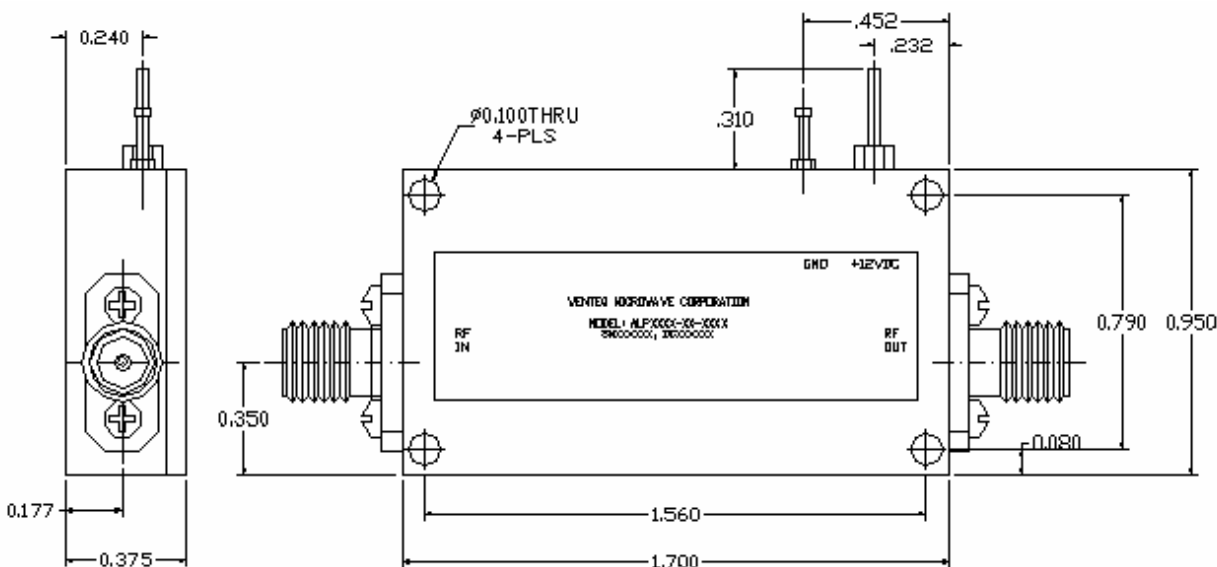


Features:

- low noise, high gain
- Input protected, 1Watt input no damage power
- Low VSWR, unconditional stable
- Small size, low cost
- SMA female connector I/O
- Operating temperature -10~+60°C, storage temperature -50~+85°C

Electrical Specifications

Frequency Range	3.1 to 3.5 GHz
Noise Figure	1.2 dB Typical, 1.6dB Max@+25degree C
P-1dB Compression Point	+10dBm min
Nominal Gain	30 dB @25°C base plate temperature
Gain flatness	+/-1.0 dB over whole band
Gain Variation	+/-1.0dB over -10 to +65°C ambient temperature
Maximum input no damage power	1Watt CW
Input VSWR	1.5:1 typical 1.8:1 maximum
Output VSWR	1.5:1 typical, 1.8:1 maximum
Spurious	-60 dBc max
Operating Temperature	-40 to +75°C
Survival Temperature	-50 to +85°C
DC Power Supply	120mA@+12V
In/Out connectors	SMA-type female
Size	1.70"x0.95"x0.40

Mechanical Structure:

Note: All units in inches.