



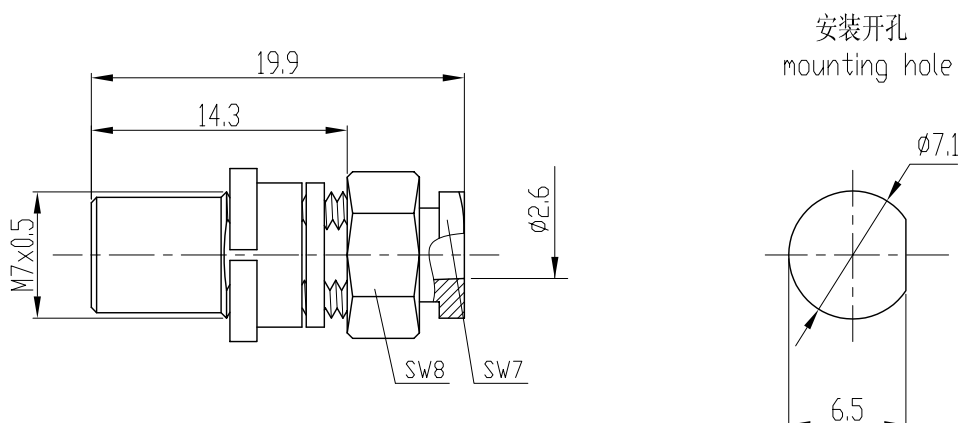

剥线尺寸
stripping dimension

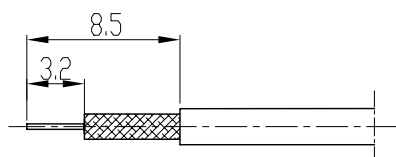

产品型号 type	电缆型号 cable type
SMB-KY2	SFF-50-1、RG178/U

Electrical Characteristics:

- Characteristic Impedance: $50\ \Omega$
- Frequency range: DC~3Ghz
- Contact resistance
Center conductor: $\leq 6.0\ m\Omega$
Out conductor: $\leq 1.0\ m\Omega$
- Insulation resistance: $\geq 1000M\Omega$
- Insulator withstanding: 750V
- VSWR: ≤ 1.4
- Durability: 500cycles

Application: MIL-C-39012/68A

Material&Finishing

- Center contact:
Female: beryllium copper, gold plated
- Body: brass, gold plated
- Insulators: PTFE


主要性能指标:

- 特性阻抗: $50\ \Omega$
- 频率范围: DC~3Ghz
- 接触电阻:
中心导体: $\leq 6.0\ m\Omega$
外导体: $\leq 1.0\ m\Omega$
- 绝缘电阻: $\geq 1000M\Omega$
- 介质耐压: 750V
- 电压驻波比: ≤ 1.4
- 插拔次数: 500次

执行标准: MIL-C-39012/68A

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

		SCALE		SMB-KY2 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table><tr><td>FRACTIONS</td><td>DECIMALS</td><td>ANGLES</td></tr><tr><td>.X±</td><td>.15</td><td>±1°</td></tr><tr><td>.XX±</td><td>.05</td><td></td></tr><tr><td>.XXX±</td><td></td><td></td></tr></table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
		FRACTIONS	DECIMALS			ANGLES											
.X±	.15	±1°															
.XX±	.05																
.XXX±																	
2.5:1																	
	NAME	DATE															
DRAWN																	
CHECKED																	
APPROVED																	

西安富士达科技股份有限公司

XI'AN FORSTAR S&T CO.,LTD.