


剥线尺寸
stripping dimension

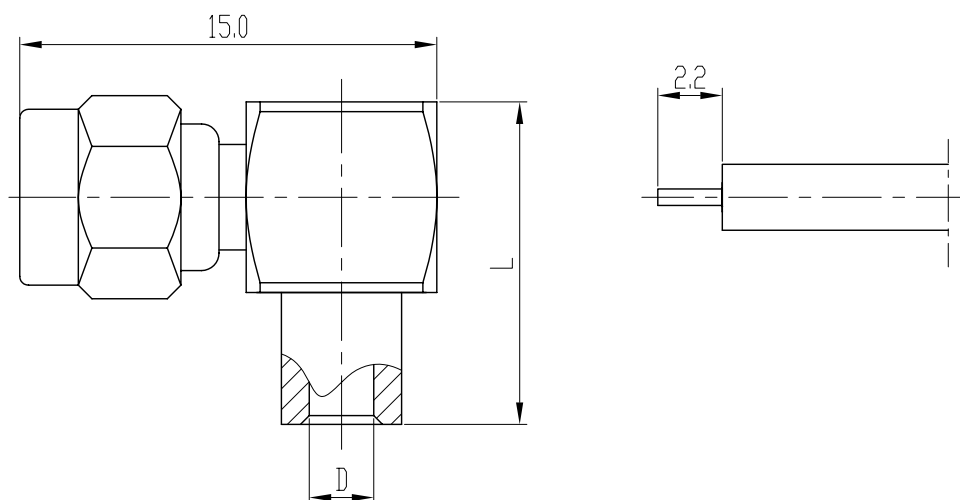

产品型号 type	L	D	电缆型号 cable type
SMC-KWB2	11.0	Ø2.2	SFT-50-2-1、RG405/U
SMC-KWB3	11.6	Ø3.6	SFT-50-3-1、RG402/U

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: $\leq 6.0 \text{ m}\Omega$
Out conductor: $\leq 1.0 \text{ m}\Omega$
- Insulation resistance: $\geq 1000 \text{ M}\Omega$
- Insulator withstanding: 750V
- VSWR: ≤ 1.4
- Durability: 5000cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: $\leq 6.0 \text{ m}\Omega$
外导体: $\leq 1.0 \text{ m}\Omega$
- 绝缘电阻: $\geq 1000 \text{ M}\Omega$
- 介质耐压: 750V
- 电压驻波比: ≤ 1.4
- 插拔次数: 5000次

Application: MIL-C-39012/73A


执行标准: MIL-C-39012/73A

Material&Finishing

- Center contact:
Female: beryllium copper, gold plated
- Bodies: brass, gold plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插孔: 铍青铜, 镀金
- 壳体: 黄铜, 镀金
- 绝缘子: 聚四氟乙烯

	SCALE		SMC-KWB2 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE <table border="1"> <thead> <tr> <th>FRACTIONS</th> <th>DECIMALS</th> <th>ANGLES</th> </tr> </thead> <tbody> <tr> <td>.X±</td> <td>.15</td> <td>±1°</td> </tr> <tr> <td>.XX±</td> <td>.05</td> <td></td> </tr> <tr> <td>.XXX±</td> <td></td> <td></td> </tr> </tbody> </table>	FRACTIONS	DECIMALS	ANGLES	.X±	.15	±1°	.XX±	.05		.XXX±		
	FRACTIONS	DECIMALS			ANGLES											
.X±	.15	±1°														
.XX±	.05															
.XXX±																
	4:1															
	NAME	DATE														
DRAWN																
CHECKED																
APPROVED																

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.