


4

3

2

1

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

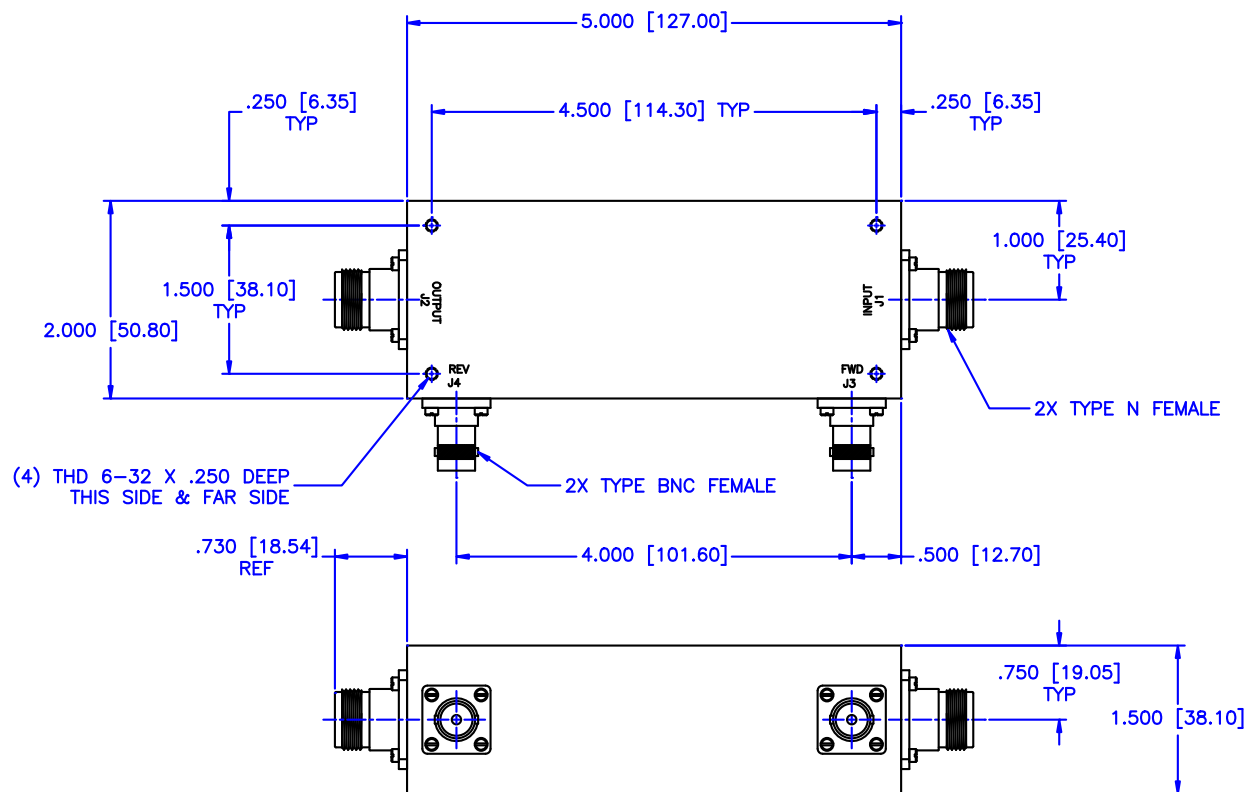

SPECIFICATIONS

FREQUENCY RANGE: 0.01-250 MHz
FREQUENCY SENSITIVITY: ± 0.50 dB
INSERTION LOSS: 0.50 dB Max.
DIRECTIVITY: 20 dB Min.
VSWR PRIME LINE: 1.10:1 Max.
POWER: 200 Watts

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	03-26-1999
APPROVED:	DATE:
T. Nguyen	03-26-1999




MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
<http://WWW.MCLI.COM>

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: $\pm 1/64$
DECIMALS: $\pm 0.01 \pm 0.005$
ANGLE: $\pm 1/2^\circ$

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY
AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN
PERMISSION FROM MICROWAVE COMMUNICATIONS
LABORATORIES INC. (MCLI)



DRAWING TITLE:

HIGH POWER DUAL DIRECTIONAL COUPLER

PART NO.

HDL-3-40

CAGE CODE:

OD2L5

SIZE:

C

REV:

N/A

DWG NO.

81224

DO NOT SCALE THE DRAWING