


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

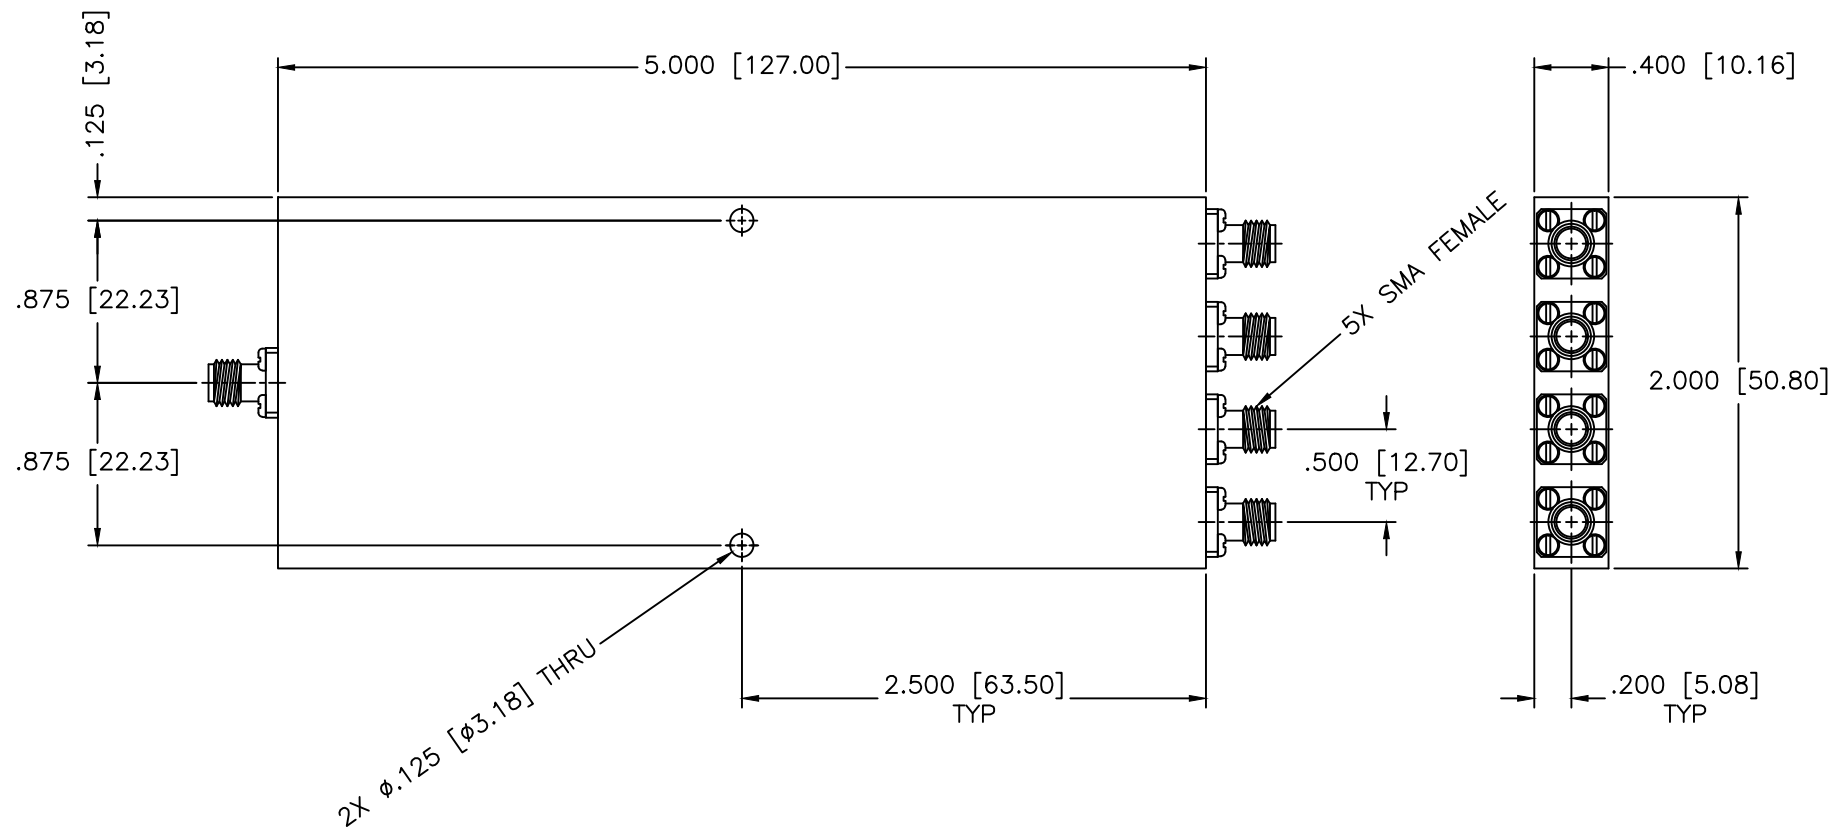

SPECIFICATIONS

Frequency Range: 1.3–3.5 GHz
Insertion Loss: 0.8dB Min.
Isolation: 18dB Min.
VSWR In/Out: 1.40:1/1.35:1 Max.
Amplitude Balance: ± 0.3 dB Max.
Phase Balance: ± 6 Deg. Max.
Power: 30 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: ± 0.01 ± 0.005 ANGLE: $\pm 1/2^\circ$		SHEET:	N/A
DRAWN:		DATE:		DRAWING TITLE:	
Paiboon Luekhamhan		05-12-2004		4-WAY POWER DIVIDER	
APPROVED:		DATE:		PART NO.	
T. Nguyen		05-12-2004		PS4-25	
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:	OD2L5
		THIRD ANGLE PROJECTION		SIZE:	A
				REV:	N/A
				DWG NO.	82027
				DO NOT SCALE THE DRAWING	