


剥线尺寸
stripping dimensions

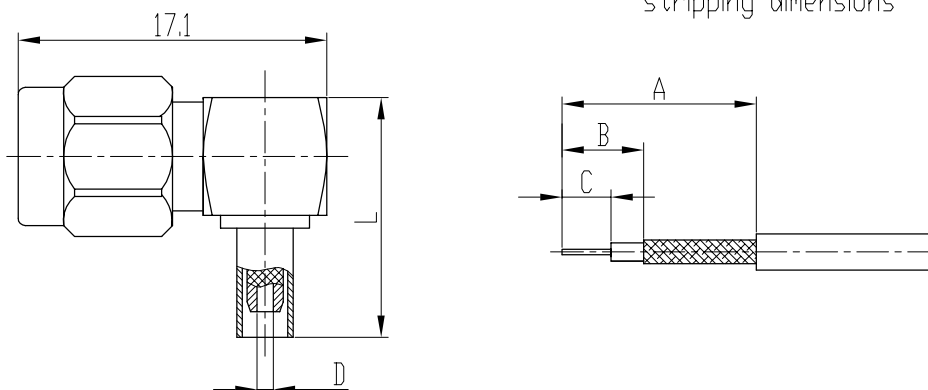

产品型号 type	电缆型号 type cable	A	B	C	D	L
SMA-JW2	SFF-50-1、RG178/U	10.0	3.5	1.5	∅0.9	13.2
SMA-JW3	SFF-50-1.5-1、RG316/U	11.0	5.0	1.5	∅1.6	15.3
SMA-JW3A	RG316DT					
SMA-JW4	SFF-50-2-1	13.5	5.0	2.0	∅2.3	17.4
SMA-JW4-1	SFF-50-2-2					
SMA-JW5	SFF-50-2-1、RG58/U	15.5	5.0	2.0	∅3.1	22.3
SMA-JW223	RG223/U					
SMA-JW5A	SFF-50-3-2、RG142B/U					

Electrical Characteristics:

- Characteristic Impedance: 50 Ω
- Frequency range: DC~4Ghz
- Contact resistance
Center conductor: ≤3.0 mΩ
Out conductor: ≤2.0 mΩ
- Insulation resistance: ≥5000MΩ
- Insulator withstanding: 1000V
- VSWR: ≤1.4
- Durability: 500cycles

主要性能指标:

- 特性阻抗: 50 Ω
- 频率范围: DC~4Ghz
- 接触电阻:
中心导体: ≤3.0 mΩ
外导体: ≤2.0 mΩ
- 绝缘电阻: ≥5000MΩ
- 介质耐压: 1000V
- 电压驻波比: ≤1.4
- 插拔次数: 500次

Application: MIL-C-39012/55D

执行标准: MIL-C-39012/55D

Material&Finishing

- Center contact :
Male: brass, gold plated
- Body: brass, gold plated
- Crimp ferrule: copper, nickel plated
- Insulators: PTFE

材料和镀层

- 中心接触件:
插针: 黄铜, 镀金
- 壳体: 黄铜, 镀金
- 线夹: 黄铜, 镀镍
- 绝缘子: 聚四氟乙烯

 	SCALE	SMA-JW2 RF COAXIAL CONNECTOR	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE mm, TOLERANCES ARE FRACTIONS DECIMALS ANGLES .X± .15 ±1° .XX± .05 .XXX±
	2.5:1		
NAME	DATE		
DRAWN			
CHECKED			
APPROVED			

西安富士达科技股份有限公司
XI'AN FORSTAR S&T CO.,LTD.